

Open Geospatial Consortium

Submission Date: 2018-03-20

Approval Date: 2018-08-27

Publication Date: 2018-12-19

External identifier for OGC® document: <http://www.opengis.net/doc/BP/CDB-core-annexes/1.0>

Internal reference number of this OGC® document: 16-005r3

Version: 1.1

Category: OGC® Best Practice

Editor: Carl Reed

Volume 2: OGC CDB Core: Model and Physical Structure: Informative Annexes

Copyright notice

Copyright © 2018 Open Geospatial Consortium

To obtain additional rights of use, visit <http://www.opengeospatial.org/legal/>.

Warning

This document defines an OGC Best Practices on a particular technology or approach related to an OGC standard. This document is not an OGC Standard and may not be referred to as an OGC Standard. It is subject to change without notice. However, this document is an official position of the OGC membership on this particular technology topic.

Document type: OGC® Best Practice
Document subtype:
Document stage: Approved
Document language: English

License Agreement

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD.

THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications. This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.

Contents

1. Scope	5
2. Conformance	7
3. References	7
4. Terms and Definitions	7
5. Conventions	7
5.1 Identifiers	7
6. Annex A: Conformance Class Abstract Test Suite (Normative).....	9
7. Annex B Rationale: Sensor Simulation - Achieving Device-Independence	10
8. Annex C: Reasons for Using Jpeg.....	12
9. Annex F Rationale: Partitioning the Earth into Tiles	14
10. Annex G Rationale: Importance of Level of Detail.....	18
11. Annex H Informative: JPEG.....	21
12. Annex I Informative: ZipFile Format Notes	22
13. Annex J: Light Names and Hierarchy.....	24
14. Annex M: CDB Directory Naming and Structure	35
15. Annex O: List of Texture Component Selectors.....	36
16. Annex Q: Table of Dataset Codes	45
17. Annex R: Derived Datasets within the CDB	47
18. Annex S: Default Read and Write values for Simulator Client-Devices.....	50

i. **Abstract**

This document provides the Annexes for the CDB Core: Model and Physical Structure standard. The only exception is Annex A, Abstract Test Suite. The CDB ATS Annex is in Volume 1: Core document.

ii. **Keywords**

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, CDB, annexes

iii. **Preface**

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

iv. **Submitting organizations**

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

CAE Inc.
Carl Reed, OGC Individual Member
Envitia, Ltd
Glen Johnson, OGC Individual Member
KaDSci, LLC
Laval University
Open Site Plan
University of Calgary
UK Met Office

The OGC CDB standard is based on and derived from an industry developed and maintained specification, which has been approved and published as OGC Document 15-

003: OGC Common Data Base Volume 1 Main Body. An extensive listing of contributors to the legacy industry-led CDB specification is at Chapter 11, pp 475-476 in that OGC Best Practices Document (https://portal.opengeospatial.org/files/?artifact_id=61935).

v. Submitters

All questions regarding this submission should be directed to the editor or the submitters:

Name	Affiliation
Carl Reed	Carl Reed & Associates
David Graham	CAE Inc.

1. Scope

This document contains a number of annexes related to the OGC CDB Core standard.

For the purposes of being able to cross reference this OGC Best Practice with the previous versions of the CDB standard, the following annex “crosswalk” is provided.

OGC Best Practice and CDB 3.2	OGC CDB Standard Version 1.0
Formerly Annex A10 in Volume 2	Annex B Rationale: Sensor Simulation - Achieving Device-Independence
Main Body: Rationale for using JPEG	Annex C Reasons for Using JPEG
Formerly Annex B in Volume 2	Annex D: TIFF Implementation Requirements
Formerly Annex D in Volume 2	Annex E: ShapeFile dBASE III Guidance
Formerly Annex A.11 in Volume 2	Annex F: Annex F Rationale: Partitioning the Earth into Tiles
Formerly Annex A.12	Annex G Rationale: Importance of Level of

	Detail
Formerly Annex A.17 Volume 2	Annex H: JPEG Informative annex
Was Annex U, Volume 2	Annex I ZIP File Informative annex
Formerly Annex E, Volume 2	Annex J: Light Hierarchy
Formerly Annex M, Volume 2	Annex M: CDB Directory Naming and Structure
Formerly Annex O, Volume 2	Annex O: List of Texture Component Selectors
Formerly Annex Q, Volume 2	Annex Q: Table of Dataset Codes
Formerly Annex R, Volume 2	Annex R: Derived Datasets within the CDB
Formerly Annex S, Volume 2	Annex S: Default Read and Write values to be used by Simulator Client-Devices

For ease of editing and review, the standard has been separated into 12 Volumes and a schema repository.

- Volume 0: OGC CDB Companion Primer for the CDB standard. (Best Practice)
- Volume 1: OGC CDB Core Standard: Model and Physical Data Store Structure. The main body (core) of the CBD standard (Normative).
- Volume 2: OGC CDB Core Model and Physical Structure Annexes (Best Practice).
- Volume 3: OGC CDB Terms and Definitions (Normative).
- Volume 4: OGC CDB Use of Shapefiles for Vector Data Storage (Best Practice).
- Volume 5: OGC CDB Radar Cross Section (RCS) Models (Best Practice).
- Volume 6: OGC CDB Rules for Encoding Data using OpenFlight (Best Practice).
- Volume 7: OGC CDB Data Model Guidance (Best Practice).
- Volume 8: OGC CDB Spatial Reference System Guidance (Best Practice).
- Volume 9: OGC CDB Schema Package: provides the normative schemas for key features types required in the synthetic modelling environment. Essentially, these schemas are designed to enable semantic interoperability within the simulation context. (Normative)

- Volume 10: OGC CDB Implementation Guidance (Best Practice).
- Volume 11: OGC CDB Core Standard Conceptual Model (Normative)
- Volume 12: OGC CDB Navais Attribution and Navais Attribution Enumeration Values (Best Practice)

2. Conformance

This section is not applicable to this document.

3. References

The following normative documents contain provisions that, through reference in this text, constitute provisions of this document. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. For undated references, the latest edition of the normative document referred to applies.

4. Terms and Definitions

This document uses the terms defined in Sub-clause 5.3 of [OGC 06-121r8], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this Best Practice.

Other Terms and Definitions may be found in Volume 3: OGC CDB Terms and Definitions (normative) of Best Practice.

5. Conventions

This section provides details and examples for any conventions used in the document. Examples of conventions are symbols, abbreviations, use of XML schema, or special notes regarding how to read the document.

5.1 Identifiers

The normative provisions in this Best Practice are denoted by the URI

`http://www.opengis.net/spec/CDB/1.0/annexes`

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.

6. Annex A: Conformance Class Abstract Test Suite (Normative)

Not applicable for this document.

7. Annex B Rationale: Sensor Simulation - Achieving Device-Independence

Formerly Annex A10 in Volume 2

One of the primary objectives of the CDB Standard is to provide and integrate all of the data required by all sensor devices, not just Image Generators producing the Out the Window (OTW) scenes. The purpose of this integration, among other things, is to achieve and maintain a high level of correlation among the many client-devices (subsystems) within a simulator. Furthermore, this integration must be done independently of the client-device or the sensor type, with little or no duplication of data amongst clients. In addition to the OTW, many simulator client-devices are required to simulate the synthetic environment over different portions of the electromagnetic spectrum, infrared (e.g. FLIR, NVG), microwaves (e.g. radar), audio (e.g. sonar), etc. Up to now, the current state of the art approaches to the simulation of sensors has typically been quite proprietary to the client-device implementation of the various vendors. There have been no universally accepted simulation models suitable for use in simulation.

Sensor simulation typically requires a simulation of the device itself, supplemented by a complete simulation of the synthetic environment over the portion of the electromagnetic spectrum that is relevant to this device. The former simulation is referred to as the Sensor Simulation Model (SSM) while the latter is called the Sensor Environmental Model (SEM). In the past, the SEM relied heavily on environmental databases whose content was designed to match the functionality, fidelity, structure and format requirements of the SEM. The level of realism possible by the SEM depended **heavily** on the quality, quantity and completeness of the data available. The environmental database was highly device-specific and could not be readily ported to other platforms.

A SEM is usually based on mathematical model of the environment for the portion of the electromagnetic spectrum of interest. The SEM acts much as a black box that produces a response in accordance to input data. A significant portion of this data must come from the CDB; however, the key is to segregate all device-dependent data and all SEM-dependent data from the modeling data that represents the synthetic environment. In order to accommodate the most different kind of sensors possible, a common denominator must be chosen. In the CDB standard, this common denominator is called a material. This is the subject of this annex.

One of the fundamental issues of sensor simulation involves the handling of material properties. As discussed earlier, the determination of which material properties should be supported heavily depends on:

- a) the sensor types to be supported;

- b) the vendors' sensor simulation implementations to be supported; and
- c) the level of fidelity, functionality and precision of the SEMs to be supported.

Clearly, the task of determining a definitive list of material properties that would accommodate all of the above requirements for the today's sensor types, vendor implementations and SEMs would be a significant challenge. Furthermore, once released, the materials properties would limit any SEM innovation by the industry. As a result, the CDB Standard limits its jurisdiction over the material properties.

Instead, the CDB standard defines and publicly defines a list of materials that can be used in a CDB. It is the responsibility of each vendor to define the properties (that satisfies the sensor type) for these CDB materials. As a result, vendors are totally free to select material properties that satisfy the fidelity, functionality and precision requirements of the SEM for the sensor type of interest. Alternately, if the vendors have their own list of materials, they can create a mapping between CDB materials and their internally supported list of materials. This approach allows client-devices to retain their SEMs as well as their own sets of material properties.

The materials.xsd and materials.xml schema in the CDB schema package enumerates the base materials supported by this standard.

8. Annex C: Reasons for Using Jpeg

(Formerly from body of Best Practice Volume 1)

The CDB Standard prescribes the use of an industry standard compression algorithm for its storage intensive raster imagery datasets. This not only provides a substantial reduction in storage, but also reduces the data transmission bandwidths associated with simulator's access to the synthetic environment database at runtime. As a result of its storage efficiency, the CDB Standard relies on relatively few data formats for storing its datasets. There is no benefit (other than storage efficiency) to be gained in supporting any other specialized data formats whose underlying objective is only for storage efficiency. The CDB Standard embodies the JPEG 2000 industry standard format for raster imagery because it has comparable storage efficiency to all of these image formats without sacrificing any generality. JPEG 2000 has been chosen by the CDB Standard as a format for the storage of OTW raster imagery because of the following characteristics.

1. High compression efficiency: Compression better than 0.25 bits per pixels. Virtually indiscernible loss in image quality for 10:1 – 20:1 compression.
2. Lossless and lossy compression: Lossless compression ratios approx. 1.7:1
3. Perceptual color space internal coding: Allow dark images to be reconstructed without banding artifacts.
4. High dynamic range: Compress and decompress images with various dynamic ranges (e.g., 1-bit to 16-bit) for each color component.
5. Large images sizes: Up to $(2^{32} - 1)$

There are other characteristics of the JPEG 2000 that are worth mentioning but are not directly beneficial to the CDB Standard. Those are:

1. Progressive image reconstruction: Allow images to be reconstructed with increasing pixel accuracy and resolution.
2. Region of interest coding: Permits certain Region of Interest (ROI's) in the image to be coded and transmitted with better quality and less distortion than the rest of the image.
3. Seamless quality and resolution scalability: Without having to download the entire file
4. Error resilience during transfers.

JPEG 2000 will be solely targeted at Raster Imagery data only. The reason is simply because of its highly efficient compression scheme that fits well with the goal of reducing

the huge datasets associated with Imagery. Other raster-based datasets defined in the CDB will solely be using the TIFF format due to their more manageable size.

9. Annex F Rationale: Partitioning the Earth into Tiles

Formerly Appendix A11 in Volume 2 of the CDB Best Practice.

This section provides rationale for partitioning the world into tiles.

The design of the CDB standard tile representation is centered on three primary considerations.

- (1) A tile representation comprehensive enough to accommodate the entire earth.
- (2) A tile representation that lends itself to real-time implementation by a CDB system and all of its attached simulator client-devices.

A numerically straightforward mapping (such as a simple scaling) to map lat-long coordinates into CDB coordinates and vice versa is highly desirable for real-time implementation considerations.

- (3) A tile representation with a system of units that conforms as much as possible to geographic standards.

One of the underlying motivations driving the CDB tile representation is the need for a system that will remain as close to the raw source data as possible which currently is DTED and GeoTIFF; DTED uses a geographic coordinate system defined by latitudes and longitudes. The basic unit in DTED is a geo-cell, which always has a height and width of one degree. In order to maintain a density of data that does not increase inordinately when moving towards the poles, the grid post intervals (measured in degrees or arc-sec) along the longitudinal axis are increased at specific latitudes; for instance, at DTED level 2, the latitude interval is always one second of arc but the longitude interval is one second of arc at latitudes from 0 to 50 degrees, from latitudes 50 to 70 the interval is two arc seconds and so on as shown in Table A-3. INTERVALS FOR DTED LEVEL 2.

Table A-3. INTERVALS FOR DTED LEVEL 2

DTED Zone	Latitude Range (Degrees)	Latitude Interval (Arc seconds)	Longitude Interval (Arc seconds)
I	0 – 50 N-S	1	1
II	50 – 70 N-S	1	2
III	70 – 75 N-S	1	3
IV	75 – 80 N-S	1	4
V	80 – 90 N-S	1	6

Before going into the detailed design of the CDB tile representation, it is worth stating the guiding principles that constrain the approach used by the CDB tile representation.

- (1) The earth model is divided (in latitude) into slices.
- (2) The slice's x-axis is aligned to WGS-84 lines of latitude.
- (3) The slice's y-axis is aligned to WGS-84 lines of longitude.
- (4) The number of units along the slice's y-axis for a given level of detail is the same for all slices.

The earth surface geodetic dimension in arc-second of y-axis units within an earth slice and in all earth slices is exactly the same, regardless of latitude.

- (5) The geodetic dimension of an x-axis unit in arc-second is constant within a zone, but is re-defined at pre-selected latitudes to achieve a greater level of spatial sampling uniformity in all tiles; this overcomes the narrowing effect of increased latitudes on longitudinal distances. The definition of zones in the CDB is the same as those in DTED (with the exception of the poles).
- (6) The number of units along the slice's x-axis for a given level of detail is the same within each zone.
- (7) The number of units along the slice's y-axis is constrained to a 2^n -multiple in all slices.

Many simulator client devices impose constraints related to the run-time use of binary pyramidal structures (such as mip-maps, quadtrees, etc.). A binary pyramidal structure is simply a collection of two-dimensional arrays; each array represents the same content but at successively finer levels of resolution.

- (8) The number of units along the slice's x-axis will vary depending on which zone the latitude of the slice belongs. At this point we introduce the

concept of a CDB Geocell, which differs slightly from a DTED Geocell. A DTED cell is always 1×1 degrees. In contrast, a CDBGeocell always has a height of 1 degree but has a varying width depending on its latitude. Table A-4. Size of CDB Geocell per zone shows the dimensions of a CDB Geocell per zones of latitude. For instance, in latitude zone 5, which goes from -50 to 50 degrees latitude, a CDB Geocell is 1×1 degree, in zone 4 and 6 which goes from latitude 50 to 70 degrees the cell size is 1×2 degrees. The main reason to introduce this concept is to maintain a reasonable eccentricity between the sides by trying to keep them as close to a square as possible. Two criteria are used to define the size of a CDB Geocell.

- (a) A CDB Geocell must contain a whole number of DTED Geocells; in other words a CDB Geocell must start and end on a whole degree along the longitudinal axis. This is done so as to facilitate mapping from CDB Geocells to DTED Geocells.
- (b) The length of the CDB Geocell must be a whole factor of 180, in other words length of 1, 2, 3, 4, 6 and 12 degrees are legal but lengths of 7 and 8 degrees would not be since these are not exact factors of 180.

Table A-4. Size of CDB Geocell per zone

CDB Zone	Latitude Range (Degrees)	CDBGeocell size (deg Lat \times deg Lon)	Number of DTED Geocells
0	$-90 \leq \text{lat} < -89$	1 X 12	12
1	$-89 \leq \text{lat} < -80$	1 X 6	6
2	$-80 \leq \text{lat} < -75$	1 X 4	4
3	$-75 \leq \text{lat} < -70$	1 X 3	3
4	$-70 \leq \text{lat} < -50$	1 X 2	2
5	$-50 \leq \text{lat} < +50$	1 X 1	1
6	$+50 \leq \text{lat} < +70$	1 x 2	2
7	$+70 \leq \text{lat} < +75$	1 x 3	3
8	$+75 \leq \text{lat} < +80$	1 x 4	4
9	$+80 \leq \text{lat} < +89$	1 x 6	6
10	$+89 \leq \text{lat} < +90$	1 x 12	12

The variable CDB Geocell size in the CDB standard has the following benefits.

1. Reduces the simulator client processing overheads associated with the switching from one zone to another. (Due to the small number of zones across the earth.)
2. Reduces the variation of longitudinal dimensions (in meters) to a maximum of 50%.
3. Improves storage efficiency.

10. Annex G Rationale: Importance of Level of Detail

Formerly Appendix A-12 of Volume 2 of the OGC CDB Best Practice.

The availability of LODs for most datasets is critical for real-time performance. Many simulator client-devices can readily take advantage of an LOD structure because many clients naturally require less detail with increasing distance away from the simulated own ship position. For example, the projection of screen pixels (i.e. pixels in an IG image plane) onto near-field terrain subtends much less area than the projection of screen pixel onto far-field terrain near the horizon; as a result, much less detail is required at far range. In addition, clients may need to revert to an alternate coarser representation if they cannot cope with the paging bandwidths, memory footprint or computational requirements of finer LODs. This provides a solid basis on which client-devices can build paging managers, load management and memory management algorithms.

The following example illustrates the important performance considerations and the inherent performance advantage that can be achieved with an LOD structure. Consider a simulator client-device, with a capability to display terrain imagery out to 128 km; the imagery is 1m at its finest available resolution and the simulated ownship is flying at 100 m/s. Under these conditions, and without the benefit of an LOD organization (as illustrated in Figure A-15: Paging of Terrain Imagery without an LOD Structure), the client-device would require access to the imagery at a rate of ~100 Mpixels/sec. Consider on the other hand the same operating conditions but with the client-device accessing LOD-organized imagery (as illustrated in Figure A-14: Paging of Terrain Imagery with an LOD Structure). Furthermore, assume that the client-device only requires 1m imagery for ranges less than 1/2 km, 2m for ranges less than 1km, 4m for ranges less than 2km, and so on. With the benefit of an LOD structure, the client-device would require access to the imagery at a much lower rate of ~1 Mpixels/sec, reducing access bandwidth by a factor of ~100x over the non-LOD approach. Clearly, such performance gains cannot be ignored for real-time applications such as flight simulators, especially when one realizes that access bandwidth increases as the square of the imagery resolution.

In addition to a reduction in access bandwidth, the LOD structure also benefits simulator client-devices that have a requirement to dynamically filter the data to control aliasing. In effect, part of the client-device filtering process is relegated to an off-line process.

The CDB standard does not enforce, nor does it specify the type of filter used to compute the data element values of raster-organized or list-organized datasets. Yet, it is clear that inadequate off-line filter may affect the rendering quality of the affected client-devices. As a result, the CDB standard provides guidelines to govern the quality of the off-line

LOD process; these guidelines are provided with each of the raster-organized dataset (or list-organized datasets in future releases of the CDB standard).

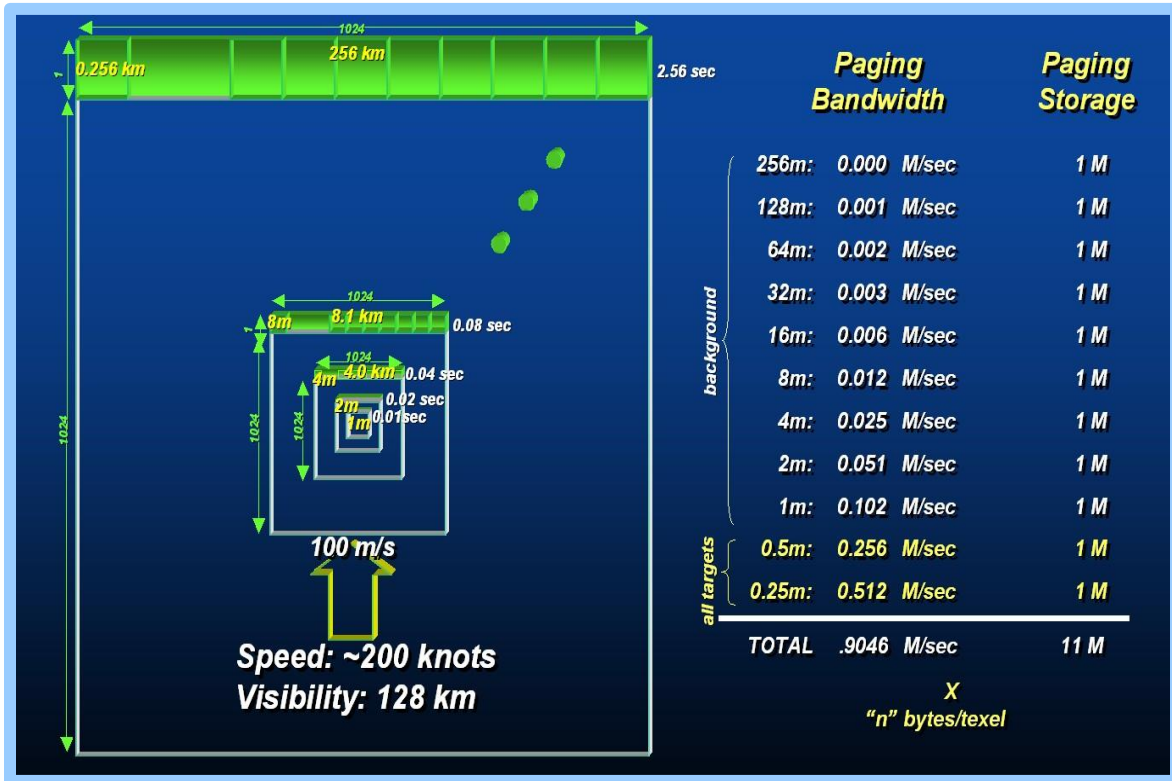


Figure A-14: Paging of Terrain Imagery with an LOD Structure

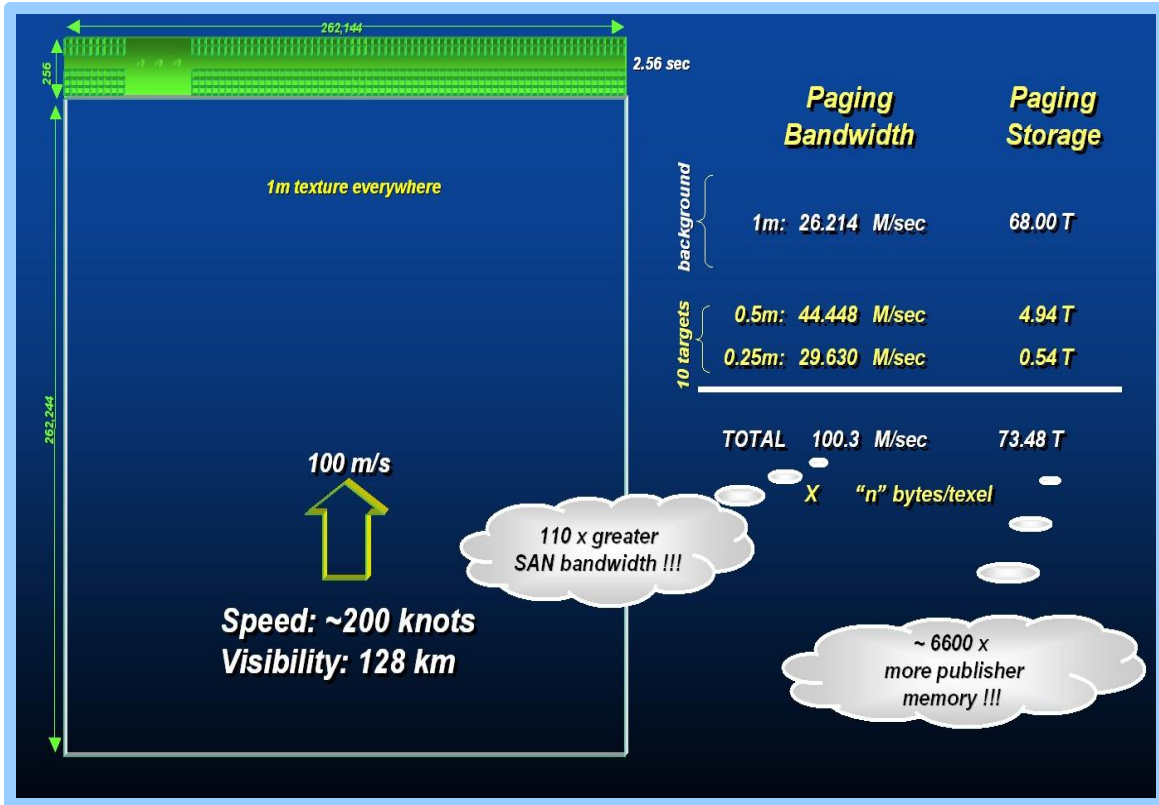


Figure A-15: Paging of Terrain Imagery without an LOD Structure

11. Annex H Informative: JPEG

Formerly Appendix A.17 in Volume 2 of the OGC CDB Best Practice

The CDB standard supports JPEG2000 for both VSTI and VSTLM component data.

As a result of the high rates of compression there are no real advantages to be gained in supporting a broad range of alternate color representations (such as single channel representations, indexed color representations, RGB-triplet color encoding such as 5-6-5, etc.). The underlying motivation behind all such schemes is driven by a desire to reduce storage and transmission bandwidths. JPEG-2000 achieves these goals and many others, refer to Table A-8 JPEG 2000 Features.

Table A-8 JPEG 2000 Features

<p>High compression efficiency: Compression better than 0.25 bits per pixels, 20% compression efficiency improvement over JPEG.</p>	<p>High dynamic range: Compress images with various dynamic ranges (e.g. 1-16 bit) for each color component.</p>
<p>Lossless and lossy compression: Lossless compression ratios approx. 1.7:1.</p>	<p>Seamless quality / resolution scalability: Without having to download the entire file.</p>
<p>Progressive image reconstruction: Allows images to be reconstructed with increasing pixel accuracy and resolution.</p>	<p>Large images sizes - up to $(2^{32} - 1)$.</p>
<p>Perceptual color space internal coding.</p>	<p>Single decompression architecture.</p>
<p>Region of interest coding: Permits certain ROI's in the image to be coded and transmitted with better quality and less distortion than the rest of the image.</p>	<p>Error resilience during transfers.</p>

12. Annex I Informative: ZipFile Format Notes

Formerly Annex U in Volume 2 of the OGC CDB Best Practice

The archive zip format used in the CDB standard is based on

APPNOTE.TXT - .ZIP File Format Specification

URL: <http://www.pkware.com/documents/APPNOTE/APPNOTE-6.3.1.TXT>

Version: 6.3.1

Revised: April 11, 2007

Copyright (c) 1989 - 2007 PKWARE Inc., All Rights Reserved.

The use of certain technological aspects disclosed in the current APPNOTE is available pursuant to the below section entitled "Incorporating PKWARE Proprietary Technology into Your Product".

CDB zip compliant reader is required to support as a minimum the following features defined in APPNOTE.TXT:

- Local file header (Note: Extra field can be inserted but not required to be read)
- File data
- Data descriptor:
- Central directory structure (Note: Digital signature is supported but will not be read)
- End of central directory record: (Note: ZIP file comments are supported but will not be read)

The compression methods supported:

- No compression
- Deflate (Enhanced Deflate is not required to be supported)

The following features are not required to be supported thus are optional and left to the implementation:

- Archive decryption header
- Archive extra data record.
- Zip64 end of central directory record
- Zip64 end of central directory locator
- Splitting and Spanning ZIP files

- Encryptions of any type

Note that anything not listed in this section is by default assumed not to be supported.

13. Annex J: Light Names and Hierarchy

Light Hierarchy	v4.0 Light Code	v4.1 Light Code	Light Code	Description	In bin etc. normalized	Color normalized	Directionality	Alt. H. (degrees)	Alt. H. Vert. (degrees)	In bin etc. Res. normalized	Flash emty. (s)	Dr. Cycle normalized
Light	0	0	0	All purpose generic Light	0.0	11111	Omni	—	—	—	—	—
Platform	1	1	1	Generic Platform Light	0.0	11111	Omni	—	—	—	—	—
Air	2	2	2	Generic Aircraft Lights	0.0	11111	Omni	—	—	—	—	—
Aircraft Helix	3	3	3	Generic Light for Aircraft and Helicopters	0.0	11111	Omni	—	—	—	—	—
Anti-collision	4	4	4	Generic Anti collision Light - normally red flashing	0.0	11010	Omni	—	—	—	—	—
Bottom Light	5	5	5	Anti-collision found on bottom of the fuselage	0.0	11010	Omni	—	—	—	—	—
NVC Bottom Light	6	6	6	Anti-collision found on bottom of the fuselage in NVC Mode	0.0	11010	Omni	—	—	—	—	—
Top Light	7	7	7	Anti-collision found on Top of the fuselage	0.0	11010	Omni	—	—	—	—	—
NVC Top Light	8	8	8	Anti-collision found on Top of the fuselage in NVC Mode	0.0	11010	Omni	—	—	—	—	—
High Intensity	501	501	501	High Intensity Anti-collision Light	0.05	11010	Omni	—	—	—	0.7	0.25
Formation Light	9	9	9	Fluorescent formation strip Light	0.0	11111	Omni	—	—	—	—	—
Flood Light	10	10	10	White Flood Lights used to illuminate the ground or part of the aircraft	0.0	11111	Omni	—	—	—	—	—
Head Light	11	11	11	Head Light used to allow pilots to see ahead	0.0	11111	Omni	—	—	—	—	—
Identification Strobe	12	12	12	Generic Strobe Lights used in Light to indicate position	0.0	11111	Omni	—	—	—	1	0.05
Red Light	13	13	13	Red Identification strobe Light	0.0	11010	Omni	—	—	—	1	0.05
White Light	14	14	14	White Identification strobe Light	0.0	11111	Omni	—	—	—	1	0.05
IR Light	15	15	15	Infrared Lights used to indicate position using infrared instruments	0.0	11111	Omni	—	—	—	—	—
Landing Light	16	16	16	White Lights used on Landing approach	0.9	11111	Dir	60	60	—	—	—
Navigation	17	17	17	Generic Lights used in Light to indicate position	0.0	11111	Omni	—	—	—	—	—
Red Light	18	18	18	Red Navigation Light found on the left wing	0.0	11010	Omni	—	—	—	—	—
Flashing Red Light	502	502	502	Flashing Red Navigation Light found on the left wing	0.0	11010	Omni	—	—	—	1	0.5
Green Light	19	19	19	Green Navigation Light found on the right wing	0.0	01110	Omni	—	—	—	—	—
Flashing Green Light	503	503	503	Flashing Green Navigation Light found on the right wing	0.0	01110	Omni	—	—	—	1	0.5
White Light	20	20	20	White Navigation Light found on the left wing	0.0	11111	Omni	—	—	—	—	—
Flashing White Light	504	504	504	Flashing White Navigation Light found on the left wing	0.0	11111	Omni	—	—	—	1	0.5
NVC Light	21	21	21	Navigation Light used in NVC Mode	0.0	11111	Omni	—	—	—	—	—
Tail Light	22	22	22	White Tail Light	0.0	11111	Omni	—	—	—	—	—
Tail Flood	23	23	23	Flood Light used to illuminate the tail, showing of the logo or markings	0.0	11111	Omni	—	—	—	—	—
Faxi Light	24	24	24	White Lights used when Aircrafts taxi on the ground	0.0	11111	Dir	40	40	—	—	—
Wings/ Obstruction	25	25	25	Generic Wings obstruction Light	0.0	11010	Omni	—	—	—	0.5	0.25
Red Light	26	26	26	Red Obstruction Light found on left wing	0.0	11010	Omni	—	—	—	0.5	0.25
Green Light	27	27	27	Green Obstruction Light found on right wing	0.0	01110	Omni	—	—	—	0.5	0.25
Civil	28	28	28	Generic Civil aircraft Lights	0.0	11111	Omni	—	—	—	—	—
Business	29	29	29		0.0	11111	Omni	—	—	—	—	—
Regional	30	30	30		0.0	11111	Omni	—	—	—	—	—
Transport	31	31	31		0.0	11111	Omni	—	—	—	—	—
Widebody	32	32	32		0.0	11111	Omni	—	—	—	—	—
Military	33	33	33	Generic Military aircrafts Lights	0.0	11111	Omni	—	—	—	—	—
Cargo Light	34	34	34	Cargo Light	0.0	11111	Dir	180	60	—	—	—
IR	35	35	35	Infrared Cargo Light	0.0	11111	Dir	180	60	—	—	—
Refueling Light	36	36	36	Refueling Light	0.0	11111	Dir	60	60	—	—	—
Search Light	37	37	37	Search Light	0.0	11111	Dir	10	10	—	—	—
NVC Light	38	38	38	Search Light used in NVC Mode	0.9	11111	Dir	10	10	—	—	—
ASW/ Patrol	39	39	39	Generic ASW Patrol Aircraft Lights	0.0	11111	Omni	—	—	—	—	—
Bomber	40	40	40	Generic Bomber Aircraft Lights	0.0	11111	Omni	—	—	—	—	—
Cargo Tanker	41	41	41	Generic Cargo Tanker Aircraft Lights	0.0	11111	Omni	—	—	—	—	—
Pod Light	425	425	425	Generic Pod Lights on Cargo Tanker	0.0	11111	Omni	—	—	—	—	—
Starboard	426	427	427	Generic Starboard Pod Light on Cargo Tanker	0.0	11111	Omni	—	—	—	—	—
Green Light	427	428	428	Green Light All of Starboard pod	0.0	01110	Omni	—	—	—	—	—
Red Light	428	429	429	Red Light All of Starboard pod	0.0	11010	Omni	—	—	—	—	—

	Light Hierarchy	V3.0 Light Code	V3.1 Light Code	Light Code	Description	Intensity (normalized)	COLOR (normalized RGB)	Directionality type	Width_Hor (degrees)	Width_Vert (degrees)	Intensity_Res (normalized)	Frequency (Hz)	Duty_Cycle (normalized)
51		Yellow_Light	429	470	Yellow Light Aft of Starboard pod	0.6	1 1 0	Omit	--	--	--	--	--
52	Port		430	471	Generic Port Pod Lights on Cargo Tanker	0.6	1 1 1	Omit	--	--	--	--	--
53		Green_Light	431	472	Green Light Aft of Port pod	0.6	0 1 0	Omit	--	--	--	--	--
54		Red_Light	432	473	Red Light Aft of Port pod	0.6	1 0 0	Omit	--	--	--	--	--
55		Yellow_Light	433	474	Yellow Light Aft of Port pod	0.6	1 1 0	Omit	--	--	--	--	--
56	Aldus_Light		434	475	Generic Aldus Lights on Cargo Tanker	0.6	1 1 1	Omit	--	--	--	--	--
57	Starboard		435	476	Generic Starboard Aldus Lights on Cargo Tanker	0.6	1 1 1	Omit	--	--	--	--	--
58		Amber_Light	436	477	Amber aldus Light at Starboard Aft door	0.6	1 0.6 0	Omit	--	--	--	--	--
59		Green_Light	437	478	Green aldus Light at Starboard Aft door	0.6	0 1 0	Omit	--	--	--	--	--
60		Red_Light	438	479	Red aldus Light at Starboard Aft door	0.6	1 0 0	Omit	--	--	--	--	--
61		Yellow_Light	439	480	Yellow aldus Light at Starboard Aft door	0.6	1 1 0	Omit	--	--	--	--	--
62	Port		440	481	Generic Port Aldus Lights on Cargo Tanker	0.6	1 1 1	Omit	--	--	--	--	--
63		Amber_Light	441	482	Amber aldus Light at Port Aft door	0.6	1 0.6 0	Omit	--	--	--	--	--
64		Green_Light	442	483	Green aldus Light at Port Aft door	0.6	0 1 0	Omit	--	--	--	--	--
65		Red_Light	443	484	Red aldus Light at Port Aft door	0.6	1 0 0	Omit	--	--	--	--	--
66		Yellow_Light	444	485	Yellow aldus Light at Port Aft door	0.6	1 1 0	Omit	--	--	--	--	--
67	Fighter		42	42	Generic Fighter Light	0.6	1 1 1	Omit	--	--	--	--	--
68	Helicopter		43	43	Specific Military Helicopter Lights	0.6	1 1 1	Omit	--	--	--	--	--
69		Slung_Load_Light	44	44	Light Used to illuminate objects carried on a slung load	0.7	1 1 1	Omit	--	--	--	--	--
70	Attack		45	45	Generic Attack Helicopter Light	0.6	1 1 1	Omit	--	--	--	--	--
71	Cargo		46	46	Generic Cargo Helicopter Light	0.6	1 1 1	Omit	--	--	--	--	--
72	Special_Ops		47	47	Generic Special-Op Helicopter Light	0.6	1 1 1	Omit	--	--	--	--	--
73		MH47-E	445	486	Generic Special-Op MH47E Helicopter Light	0.6	1 1 1	Omit	--	--	--	--	--
74		Porch_Light	446	487	Lower White on bottom of Aft pylon near exhaust	0.6	1 1 1	Omit	--	--	--	--	--
75	Utility		48	48	Generic Utility Helicopter Light	0.6	1 1 1	Omit	--	--	--	--	--
76	Tanker		49	49	Generic Tanker Light	0.6	1 1 1	Omit	--	--	--	--	--
77	Unmanned		50	50	Generic Military Unmanned Aerial Vehicle(UAV) Lights	0.6	1 1 1	Omit	--	--	--	--	--
78		Navigation	494	494	Generic Nav Lights on UAVs to indicate position	0.6	1 1 1	Omit	--	--	--	--	--
79		Red_Light	495	495	Red navigation Light found on left wing	0.6	1 0 0	Omit	--	--	--	--	--
80		Green_Light	496	496	Green navigation Light found on right wing	0.6	0 1 0	Omit	--	--	--	--	--
81		White_Light	497	497	White navigation Light usually on the tail	0.6	1 1 1	Omit	--	--	--	--	--
82	Position		498	498	Generic Position Lights on UAVs to indicate position	0.6	1 1 1	Omit	--	--	--	--	--
83		Orange_Light	499	499	Orange position Light	0.6	1 0.6 0	Omit	--	--	--	--	--
84		White_Light	500	500	White position Light	0.6	1 1 1	Omit	--	--	--	--	--
85	Land		51	51	Generic Land Vehicle Light	0.6	1 1 1	Omit	--	--	--	--	--
86		Backup_Light	52	52	White Lights that indicate a vehicle backing up	0.3	1 1 1	Omit	--	--	--	--	--
87		Blinking_Emergency_Light	53	53	Yellow flashing emergency Lights (i.e. 4-way flashing indicator Light	0.4	1 1 0	Omit	--	--	--	0.5	0.5
88		Blinking_Turn_Light	54	54	Yellow blinking turning indicator Light	0.4	1 1 0	Omit	--	--	--	0.5	0.5
89		Brake_Light	55	55	Red Lights when brakes are applied	0.4	1 0 0	Omit	--	--	--	--	--
90	Headlight		56	56	Generic Headlight on a Land Vehicle that allow a driver to see ahead	0.6	1 1 1	Omit	--	--	--	--	--
91		Low_Beam_Light	57	57	Low beam head Lights	0.6	1 1 1	Omit	--	--	--	--	--
92		High_Beam_Light	58	58	High beam head Lights	0.6	1 1 1	Omit	--	--	--	--	--
93		Perimeter_Amber_Light	59	59	Perimeter Lights	0.4	1 0.6 0	Omit	--	--	--	--	--
94		Strobing_Blue_Light	60	60	Blue strobe (Flashing)	0.6	0 0 1	Omit	--	--	--	1	0.05
95		Strobing_Red_Light	61	61	Red strobe (Flashing)	0.6	1 0 0	Omit	--	--	--	1	0.05
96		Strobing_White_Light	62	62	White Strobe (Flashing)	0.6	1 1 1	Omit	--	--	--	1	0.05
97		Strobing_Yellow_Light	63	63	Yellow Strobe (Flashing)	0.6	1 1 0	Omit	--	--	--	1	0.05
98		Tail_Light	64	64	Red tail Lights	0.4	1 0 0	Omit	--	--	--	--	--
99		Turn_Signal_Light	65	65	Yellow turning indicator Light	0.4	1 1 0	Omit	--	--	--	--	--
100	Car		66	66	Generic Car Lights	0.4	1 1 1	Omit	--	--	--	--	--

	Light Hierarchy	v3.0 Light Code	v3.1 Light Code	Light Code	Description	Intensity (normalized)	Color (normalized RGB)	Directionality (deg)	Width_Hor (degrees)	Width_Vert (degrees)	Intensity_Res (normalized)	Frequency (Hz)	Duty_Cycle (normalized)
101	Transport_Van	67	67	67	Generic Transport Lights	0.4	1 1 1	Omni	—	—	—	—	—
102	Truck	68	68	68	Generic Truck Lights	0.4	1 1 1	Omni	—	—	—	—	—
103	Ambulance	69	69	69	Generic Ambulance Lights	0.4	1 1 1	Omni	—	—	—	—	—
104	Flattruck	70	70	70	Generic Flat truck Lights	0.4	1 1 1	Omni	—	—	—	—	—
105	Train	71	71	71	Generic Train Lights	0.4	1 1 1	Omni	—	—	—	—	—
106	Cabooses Rear Light	72	72	72	Cabooses red Light at rear of the train	0.4	1 0 0	Omni	—	—	—	—	—
107	Engine Head Light	73	73	73	Train engine white head light	0.7	1 1 1	Omni	—	—	—	—	—
108	Tank	74	74	74	Generic Tank Lights	0.6	1 1 1	Omni	—	—	—	—	—
109	Surface	75	75	75	Generic Surface Vehicle Light	0.6	1 1 1	Omni	—	—	—	—	—
110	Stacy	76	76	76	Generic Stacy Lights found on a Surface Vehicle	0.6	1 1 1	Omni	—	—	—	0.22	0.6
111	Green Light	77	77	77	Green Stacy Light	0.6	0 1 0	Omni	—	—	—	0.22	0.6
112	Red Light	78	78	78	Red Stacy Light	0.6	1 0 0	Omni	—	—	—	0.22	0.6
113	White Light	79	79	79	White Stacy Light	0.6	1 1 1	Omni	—	—	—	0.22	0.6
114	Yellow Light	80	80	80	Yellow Stacy Light	0.6	1 1 0	Omni	—	—	—	0.22	0.6
115	Marine Entry	81	81	81	Generic Marine Entry Light	0.6	1 1 1	Omni	—	—	—	—	—
116	Green Light	82	82	82	Green Light	0.6	0 1 0	Omni	—	—	—	—	—
117	Red Light	83	83	83	Red Light	0.6	1 0 0	Omni	—	—	—	—	—
118	Ship Boat	84	84	84	Generic Ship/boat Lights	0.6	1 1 1	Omni	—	—	—	—	—
119	Navigation	85	85	85	Generic Navigation Lights on a Ship/Boat	0.6	1 1 1	Omni	—	—	—	—	—
120	Directional	86	86	86	Generic Directional navigation Lights	0.6	1 1 1	Dir	180	180	—	—	—
121	Green Light	87	87	87	Green directional navigation Light	0.6	0 1 0	Dir	180	180	—	—	—
122	Red Light	88	88	88	Red directional navigation Light	0.6	1 0 0	Dir	180	180	—	—	—
123	White Light	89	89	89	White directional navigation Light	0.6	1 1 1	Dir	180	180	—	—	—
124	Omnidirectional	90	90	90	Generic Omnidirectional navigation Lights	0.6	1 1 1	Omni	—	—	—	—	—
125	Green Light	91	91	91	Green omnidirectional navigation Light	0.6	0 1 0	Omni	—	—	—	—	—
126	Red Light	92	92	92	Red omnidirectional navigation Light	0.6	1 0 0	Omni	—	—	—	—	—
127	White Light	93	93	93	White omnidirectional navigation Light	0.6	1 1 1	Omni	—	—	—	—	—
128	Search Light	94	94	94	Search Light	0.9	1 1 1	Dir	10	10	—	—	—
129	NVG Light	95	95	95	Search Light used in NVG mode	0.9	1 1 1	Dir	10	10	—	—	—
130	Civil	96	96	96	Generic Ship/boat civil Lights	0.6	1 1 1	Omni	—	—	—	—	—
131	Anchor Light	97	97	97	Lights used to illuminate the anchor	0.6	1 1 1	Dir	150	120	—	—	—
132	Flood Light	98	98	98	Lights used to illuminate the ground on the deck	0.6	1 1 1	Dir	30	30	—	—	—
133	Mast	99	99	99	Generic lights found on a mast of the civilian ship	0.6	1 1 1	Dir	22.5	120	—	—	—
134	Amber Light	100	100	100	Amber Mast Light	0.6	1 0.6 0	Dir	22.5	120	—	—	—
135	Green Light	101	101	101	Green Mast Light	0.6	0 1 0	Dir	22.5	120	—	—	—
136	Red Light	102	102	102	Red Mast Light	0.6	1 0 0	Dir	22.5	120	—	—	—
137	White Light	103	103	103	White Mast Light	0.6	1 1 1	Dir	22.5	120	—	—	—
138	Cargo	104	104	104	Generic Cargo Lights	0.6	1 1 1	Omni	—	—	—	—	—
139	Container/Vessel	105	105	105	Generic Container/Vessel Lights	0.6	1 1 1	Omni	—	—	—	—	—
140	Ferry	106	106	106	Generic Ferry Lights	0.6	1 1 1	Omni	—	—	—	—	—
141	Floating Vessel	107	107	107	Generic Floating Vessel Lights	0.6	1 1 1	Omni	—	—	—	—	—
142	Ocean Liner	108	108	108	Generic Ocean Liner specific Lights	0.6	1 1 1	Omni	—	—	—	—	—
143	Oil Rig	109	109	109	Generic Oil Rig Lights	0.6	1 1 1	Omni	—	—	—	—	—
144	Tanker	110	110	110	Generic Tanker Lights	0.6	1 1 1	Omni	—	—	—	—	—
145	Military	111	111	111	Generic Military Ship/Boat Lights	0.6	1 1 1	Omni	—	—	—	—	—
146	Flare Light	112	112	112	Light effect from a Flare	0.6	1 1 1	Omni	—	—	—	—	—
147	Flood Light	113	113	113	Lights used to illuminate the ground on the deck	0.6	1 1 1	Dir	30	30	—	—	—
148	Mast	114	114	114	Generic lights found on a mast of the military ship	0.6	1 1 1	Dir	22.5	120	—	—	—
149	Amber Light	115	115	115	Amber Mast Light	0.6	1 0.6 0	Dir	22.5	120	—	—	—
150	Green Light	116	116	116	Green Mast Light	0.6	0 1 0	Dir	22.5	120	—	—	—

Light Hierarchy	V2.0 Light Code	V2.1 Light Code	Light Code	Description	Intrn. spt. normalized	Color normalized	Directionality	Alt. Hgt. (m)	Alt. Hgt. (ft)	Alt. Hgt. (m) normalized	Alt. Hgt. (ft) normalized	Frequency (Hz)	Duty Cycle normalized
151	Red Light	117	117	Red Mast Light	0.6	1 0 0	Dr	22.5	120	--	--	--	--
152	White Light	118	118	White Mast Light	0.6	1 1 1	Dr	22.5	120	--	--	--	--
153	None	447	447	Generic High Intensity Radiated Fields Light	0.6	1 1 1	Omni	--	--	--	--	--	--
154	Amber Light	448	448	Amber HRF Light	0.6	1 0.6 0	Omni	--	--	--	--	--	--
155	Red Light	449	449	Red HRF Light	0.6	1 0 0	Omni	--	--	--	--	--	--
156	Horizon Bar	119	119	Generic Horizon Bar Light for landing on ship	0.5	0 1 0	Omni	--	--	--	--	--	--
157	Green Light	120	120	Green horizon bar Light	0.5	0 1 0	Omni	--	--	--	--	--	--
158	White Light	121	121	White horizon bar Light	0.5	1 1 1	Omni	--	--	--	--	--	--
159	Stem	450	450	Generic Stem Light	0.6	1 1 1	Omni	--	--	--	--	--	--
160	Port Light	451	451	Port stem Light	0.6	1 1 1	Omni	--	--	--	--	--	--
161	Starboard Light	452	452	Starboard stem Light	0.6	1 1 1	Omni	--	--	--	--	--	--
162	Vertical Light	453	453	Vertical Radiant Light	0.6	1 1 1	Omni	--	--	--	--	--	--
163	Aircraft Carrier	122	122	Generic aircraft carrier Light	0.6	1 1 1	Omni	--	--	--	--	--	--
164	Approach Light	123	123	Aircraft Carrier approach Light	0.5	1 1 1	Dr	75	75	--	--	--	--
165	Approach Strobe Light	124	124	Aircraft Carrier approach strobe Light	0.9	1 1 1	Dr	75	75	--	2	0.1	--
166	Deck	125	125	Generic Deck Light	0.5	1 1 1	Omni	--	--	--	--	--	--
167	Aft Light	126	126	Deck Aft area 1/4 mark	0.5	1 1 1	Omni	--	--	--	--	--	--
168	Fore Light	127	127	Deck Fore area 3/4 mark	0.5	1 1 1	Omni	--	--	--	--	--	--
169	Edge	128	128	Generic Edge Light found on a Deck	0.5	0 0 1	Omni	--	--	--	--	--	--
170	Blue Light	129	129	Blue Deck edge Light	0.5	0 0 1	Omni	--	--	--	--	--	--
171	Red Light	454	454	Red Deck edge Light	0.5	1 0 0	Omni	--	--	--	--	--	--
172	White Light	130	130	White Deck edge Light	0.5	1 1 1	Omni	--	--	--	--	--	--
173	Obstruction Light	131	131	Deck Light indicating the presence of an object which is dangerous to an aircraft	0.5	1 0 0	Omni	--	--	--	0.5	0.25	--
174	Mark Area	132	132	Generic Mark Area found on a deck	0.7	1 0.6 0	Omni	--	--	--	--	--	--
175	Amber Light	133	133	Amber deck Light	0.7	1 0.6 0	Omni	--	--	--	--	--	--
176	Green Light	134	134	Green deck Light	0.7	0 1 0	Omni	--	--	--	--	--	--
177	Red Light	135	135	Red deck Light	0.7	1 0 0	Omni	--	--	--	--	--	--
178	Ready Light	136	136	Generic Deck Ready Light	0.5	1 1 1	Omni	--	--	--	--	--	--
179	Status	137	137	Generic Status Light indicating the authority for flying operations to the Flight Deck Officer or Pilot	0.5	1 0.6 0	Omni	--	--	--	--	--	--
180	Amber Light	138	138	Amber status Light	0.5	1 0.6 0	Omni	--	--	--	--	--	--
181	Green Light	139	139	Green status Light (Go signal)	0.5	0 1 0	Omni	--	--	--	--	--	--
182	Red Light	140	140	Red status Light (Stop signal)	0.5	1 0 0	Omni	--	--	--	--	--	--
183	Flood Light	141	141	Lights used to illuminate the go under the deck	0.5	1 1 1	Dr	30	30	--	--	--	--
184	GPI	142	142	Generic Glide path indicator Light	0.7	1 0.6 0	Dr	18.0	54	--	--	--	--
185	Flashing Green Light	143	143	Green Flashing GPI	0.7	0 1 0	Dr	12.0	20	--	1.5	0.17	--
186	Flashing Orange Light	144	144	Orange Flashing GPI	0.7	1 0.6 0	Dr	18.0	54	--	3.9	0.085	--
187	Amber Light	145	145	Amber GR Light	0.7	1 0.6 0	Dr	30	5	--	--	--	--
188	Green Light	146	146	Green GPI Light	0.7	0 1 0	Dr	30	2	--	--	--	--
189	Red Light	147	147	Red GPI Light	0.7	1 0 0	Dr	30	6	--	--	--	--
190	HAI	148	148	Generic Horizontal Approach Path Indicator Light	0.5	1 1 1	Dr	80	15	--	--	--	--
191	Red Light	149	149	Red HAI Light	0.5	1 0 0	Dr	80	15	--	--	--	--
192	White Light	150	150	White HAI Light	0.5	1 1 1	Dr	80	15	--	--	--	--
193	Morning Beacon Light	151	151	Used to identify the vessel to an approaching aircraft	0.5	1 1 1	Omni	--	--	--	--	--	--
194	HPI Light	152	152	Horizontal Path Indicator	0.5	1 1 1	Omni	--	--	--	--	--	--
195	No-Go Light	153	153	Abort go Light	0.5	1 1 1	Dr	18.0	180	--	--	--	--
196	Nozzle Rotation Light	154	154	Nozzle rotation Light	0.5	1 1 1	Omni	--	--	--	--	--	--
197	Priority Light	455	455	Priority Flight control Light	0.6	1 1 1	Omni	--	--	--	--	--	--
198	SSSI	155	155	Generic Stabilized Glide Slope indicator (Approach Light indicator)	0.5	1 0.6 0	Dr	40	8.5	--	--	--	--
199	Amber Light	156	156	Amber SSSI Light	0.5	1 0.6 0	Dr	40	1.5	--	--	--	--
200	Blue Light	157	157	Blue SSSI Light	0.5	0 0 1	Dr	40	1	--	--	--	--

Light Hierarchy	V2.0 Light Code	V2.1 Light Code	Light Code	Description	Intn_dB normalized	Color normalized	Dir	Alt_Hor (degrees)	Alt_Vert (degrees)	Intn_dB_Fe normalized	Frequency (Hz)	Duty_Cycle normalized
201	Green Light	155	155	155	Green SGGI Light	0.5	0 1 0	Dr	40	1	—	—
202	Red Light	159	159	159	Red SGGI Light	0.5	1 0 0	Dr	40	0.5	—	—
203	Standby Light	160	160	160	A means of indicating an aircraft to be at standby	0.5	1 1 1	Omni	—	—	—	—
204	Steady Ship Light	161	161	161	Steady ship Light	0.5	1 1 1	Omni	—	—	—	—
205	STOL	162	162	162	Generic Short Takeoff and landing Lights	0.5	1 1 1	Omni	—	—	—	—
206	Dropline Light	163	163	163	STOL Dropline Light	0.5	1 1 1	Omni	—	—	—	—
207	Lineup Centerline Light	164	164	164	STOL Lineup Centerline Light	0.5	1 1 1	Omni	—	—	—	—
208	Waveoff Light	165	165	165	A means of indicating to approaching aircraft that recovery is not permitted and should be abort or immediate.	0.5	1 1 1	Omni	—	—	2	0.25
209	Cruiser	166	166	166	Generic Cruiser Lights	0.5	1 1 1	Omni	—	—	—	—
210	Destroyer	167	167	167	Generic Destroyer Lights	0.5	1 1 1	Omni	—	—	—	—
211	Frigate	168	168	168	Generic Frigate Lights	0.5	1 1 1	Omni	—	—	—	—
212	Patrol	169	169	169	Generic Patrol ship Lights	0.5	1 1 1	Omni	—	—	—	—
213	Battleship	170	170	170	Generic Battleship Lights	0.5	1 1 1	Omni	—	—	—	—
214	Cargo	171	171	171	Generic Cargo Lights	0.5	1 1 1	Omni	—	—	—	—
215	Subsurface	172	172	172	Generic Subsurface Vehicle Lights	0.5	1 1 1	Omni	—	—	—	—
216	Submarine	173	173	173	Generic Submarine Lights	0.5	1 1 1	Omni	—	—	—	—
217	Munition	174	174	174	Generic Munition Lights	0.5	1 1 1	Omni	—	—	—	—
218	Tracer Light	175	175	175	Light created by tracer fire effect in a bullet	0.5	1 0 0	Omni	—	—	—	—
219	Decoy Flare Light	176	176	176	Decoy flare Light	0.9	1 1 1	Omni	—	—	—	—
220	Dabrow Flare Light	177	177	177	Dabrow flare Light	0.9	1 0 0	Omni	—	—	—	—
221	Flareworks Dabrow Flare Light	178	178	178	Flareworks flare Light	0.9	1 0 0	Omni	—	—	—	—
222	Flare Light	179	179	179	Flare defensive counter measure Light effect (i.e. IR guided missile)	0.9	1 1 1	Omni	—	—	—	—
223	Chaff Light	180	180	180	Chaff defensive counter measure Light effect (i.e. Radar guided missile)	0.5	1 1 1	Omni	—	—	—	—
224	Lifeform	181	181	181	Generic Lifeform Light (regroups all Lights that could be assigned to air / human / flora/fa)	0.7	1 1 1	Omni	—	—	—	—
225	Flashlight Light	182	182	182	Hand held flashlight	0.5	1 1 1	Dr	45	45	—	—
226	Marshaller	183	183	183	Generic Marshaller Lights	0.7	1 1 1	Omni	—	—	—	—
227	Ground_Personel	184	184	184	Generic Ground Personnel Lights	0.5	1 1 1	Omni	—	—	—	—
228	Survivor	185	185	185	Generic Survivor Lights (on ground or sea)	0.7	1 1 1	Omni	—	—	1	0.25
229	Cultural	186	186	186	Generic Cultural Ground base Light	0.5	1 1 1	Omni	—	—	—	—
230	Point-Based	187	187	187	Generic Point based Light	0.5	1 1 1	Omni	—	—	—	—
231	Flood Light	188	188	188	Lights used to illuminate the ground	0.5	1 1 1	Omni	—	—	—	—
232	Obstruction	189	189	189	Generic Obstruction Light - A Light indicating the presence of an object which is dangerous to aircraft in flight.	0.9	1 0 0	Omni	—	—	—	—
233	Red			514	Generic Red Obstruction Light	0.9	1 0 0	Omni	—	—	0.5	0.5
234	Type L254 Light			515	A flashing red obstruction Light with 20-40 flashes per minute (FAA type L-254)	0.9	1 0 0	Omni	—	—	0.5	0.5
235	Type L385 Light			516	A flashing red obstruction Light with 60 flashes per minute (FAA type L-385)	0.9	1 0 0	Omni	—	—	1	0.5
236	Type L210 Light			517	A steady burning red obstruction Light (FAA type L-210)	0.5	1 0 0	Omni	—	—	—	—
237	White			518	Generic White Obstruction Light	1.0	1 1 1	Omni	—	—	0.55	0.1
238	Type L255 Light			519	A high intensity flashing white obstruction Light with 40 flashes per minute (FAA type L-255)	1.0	1 1 1	Omni	—	—	0.55	0.1
239	Type L257 Light			520	A high intensity flashing white obstruction Light with 60 flashes per minute (FAA type L-257)	1.0	1 1 1	Omni	—	—	1	0.1
240	Type L265 Light			521	A medium intensity flashing white obstruction Light with 40 flashes per minute (FAA type L-265)	0.5	1 1 1	Omni	—	—	0.55	0.1
241	Type L266 Light			522	A medium intensity flashing white obstruction Light with 60 flashes per minute (FAA type L-266)	0.5	1 1 1	Omni	—	—	1.0	0.1
242	Strobe Light	190	190	190	Flashing Ground Light that helps to indicate position	0.5	1 1 1	Omni	—	—	1	0.05
243	Communication_Tower	191	191	191	Generic Communication Tower Lights	0.5	1 1 1	Omni	—	—	—	—
244	FAIR	192	192	192	Generic Forward Area Rearm/Refuel Point Lights	0.5	1 1 1	Omni	—	—	—	—
245	IR Light	193	193	193	Forward Area Rearm/Refuel Point IR Light	0.5	1 1 1	Omni	—	—	—	—
246	Strobe Light	194	194	194	Forward Area Rearm/Refuel Point strobe Light	0.9	1 1 1	Omni	—	—	1	0.05
247	Y Light	195	195	195	Forward Area Rearm/Refuel Point Y shaped Light	0.5	1 1 1	Omni	—	—	—	—
248	Harbour Light	196	196	196	Harbour Light	0.7	1 1 1	Omni	—	—	—	—
249	Pylon	197	197	197	Generic Power Pylon Lights	0.5	1 1 1	Omni	—	—	—	—
250	Railroad Junction	198	198	198	Generic Railroad Junction Lights	0.5	1 0 0	Omni	—	—	0.57	0.5

Light Hierarchy	V0.0 Light Code	V0.1 Light Code	Light Code	Description	min_dty (normalise)	Colort (normalised path)	Directionality (open)	AM_Th_Hor (degrees)	AM_Th_Vert (degrees)	min_dty_Res (normalise)	Frequency (Hz)	DM_V_Cycle (normalise)
Flashing Red Light	199	199	199	Flashing Red rail road crossing stop Lights	0.5	1 0 0	Omni	—	—	—	0.01	0.5
Highway/Junction	200	200	200	Generic Highway Junction Lights	0.7	1 1 1	Omni	—	—	—	—	—
Bridge	201	201	201	Generic Bridge Lights	0.7	1 1 1	Omni	—	—	—	—	—
Hazard	202	202	202	Generic Hazard Light - A White Light indicating the presence of an hazard around the airport	0.5	1 1 1	Omni	—	—	—	—	—
Flashing Light	203	203	203	White hazard flashing Light	0.5	1 1 1	Omni	—	—	—	—	—
Hi Intensity Light	204	204	204	White Hi-Intensity hazard Light	0.5	1 1 1	Omni	—	—	—	—	—
Line-Based	205	205	205	Generic Line-based Lights (Linear features as Roads)	0.5	1 1 1	Omni	—	—	—	—	—
Fluorescent Light	206	206	206	Fluorescent based Light	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	207	207	207	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	208	208	208	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	209	209	209	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	210	210	210	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Multilane Divided Hwy	211	211	211	Generic Multi-lane divided Highway Lights	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	212	212	212	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	213	213	213	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	214	214	214	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	215	215	215	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Median	216	216	216	Median divider Lights	0.5	1 1 1	Omni	—	—	—	—	—
Edge	217	217	217	Highway edge/sidewalk Lights	0.5	1 1 1	Omni	—	—	—	—	—
Multilane Hwy	218	218	218	Generic Multi-lane Highway Lights	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	219	219	219	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	220	220	220	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	221	221	221	Metal Halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	222	222	222	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Median	223	223	223	Median divider Lights	0.5	1 1 1	Omni	—	—	—	—	—
Edge	224	224	224	Highway edge/sidewalk Lights	0.5	1 1 1	Omni	—	—	—	—	—
Highway	225	225	225	Generic Single Lane Highway	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	226	226	226	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	227	227	227	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	228	228	228	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	229	229	229	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Road	230	230	230	Generic Road Lights	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	231	231	231	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	232	232	232	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	233	233	233	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	234	234	234	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Boulevard	235	235	235	Generic Boulevard Lights	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	236	236	236	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	237	237	237	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	238	238	238	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	239	239	239	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Street	240	240	240	Generic Small street Lights	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	241	241	241	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Mercury Light	242	242	242	Mercury based Light	0.5	0.5 0.5 1	Omni	—	—	—	—	—
Metal Halide Light	243	243	243	Metal halide based Light	0.5	1 1 1	Omni	—	—	—	—	—
Sodium Light	244	244	244	Sodium based Light	0.5	1 1 0	Omni	—	—	—	—	—
Lane	245	245	245	Generic Lane based Light	0.5	1 1 1	Omni	—	—	—	—	—
Incandescent Light	246	246	246	Incandescent based Light	0.5	1 0.5 0.5	Omni	—	—	—	—	—
Area-Based	247	247	247	Generic Area Lights which cover a larger area	0.5	1 1 1	Omni	—	—	—	—	—
Fluorescent Light	248	248	248	Fluorescent based Light	0.5	1 1 1	Omni	—	—	—	—	—

Light Hierarchy	V0.0 Light Code	V0.1 Light Code	Light Code	Description	Inten_dft_normalized	Colr normalized	Directivity (deg)	Altitude (m)	Beam_Vert (degrees)	Inten_dft_Res normalized	Frequency (Hz)	Alt_Cycle normalized
201	Incandescent Light	249	249	Incandescent based Light	0.6	1 0 0	0.2	Omni	—	—	—	—
202	Mercury Light	250	250	Mercury based Light	0.6	0.9 0.9 1	0.2	Omni	—	—	—	—
203	Metal Halide Light	251	251	Metal Halide based Light	0.6	1 1 1	0.2	Omni	—	—	—	—
204	Sodium Light	252	252	Sodium based Light	0.6	1 1 0	0.2	Omni	—	—	—	—
205	Residential Area	253	253	Generic Residential Area based Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
206	Bright	254	254	Generic Bright residential area Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
207	Incandescent Light	255	255	Incandescent bright Light	0.6	1 0 0	0.2	Omni	—	—	—	—
208	Mercury Light	256	256	Mercury bright Light	0.6	0.9 0.9 1	0.2	Omni	—	—	—	—
209	Dim	257	257	Generic Dim residential area Lights	0.7	1 1 1	0.2	Omni	—	—	—	—
210	Incandescent Light	258	258	Incandescent dim Light	0.7	1 0 0	0.2	Omni	—	—	—	—
211	Mercury Light	259	259	Mercury dim Light	0.7	0.9 0.9 1	0.2	Omni	—	—	—	—
212	Industrial Area	260	260	Generic Industrial Area based Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
213	Bright	261	261	Generic Bright industrial area Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
214	Incandescent Light	262	262	Incandescent bright Light	0.6	1 0 0	0.2	Omni	—	—	—	—
215	Mercury Light	263	263	Mercury bright Light	0.6	0.9 0.9 1	0.2	Omni	—	—	—	—
216	Dim	264	264	Generic dim industrial area Lights	0.7	1 1 1	0.2	Omni	—	—	—	—
217	Incandescent Light	265	265	Incandescent dim Light	0.7	1 0 0	0.2	Omni	—	—	—	—
218	Mercury Light	266	266	Mercury dim Light	0.7	0.9 0.9 1	0.2	Omni	—	—	—	—
219	Downtown Area	267	267	Generic City Downtown Area Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
220	Bright	268	268	Generic bright downtown area Lights	0.6	1 1 1	0.2	Omni	—	—	—	—
221	Incandescent Light	269	269	Incandescent bright Light	0.6	1 0 0	0.2	Omni	—	—	—	—
222	Mercury Light	270	270	Mercury bright Light	0.6	0.9 0.9 1	0.2	Omni	—	—	—	—
223	Dim	271	271	Generic dim downtown area Lights	0.7	1 1 1	0.2	Omni	—	—	—	—
224	Incandescent Light	272	272	Incandescent dim Light	0.7	1 0 0	0.2	Omni	—	—	—	—
225	Mercury Light	273	273	Mercury dim Light	0.7	0.9 0.9 1	0.2	Omni	—	—	—	—
226	Airport_Lighting	274	274	Generic Airport Lighting	0.9	1 1 1	0.2	Omni	—	—	—	—
227	Apron	275	275	Generic Apron Light	0.9	1 1 1	0.2	Omni	—	—	—	—
228	Entrance Light	276	276	Apron entrance Light from runway or taxiway	0.9	1 1 1	0.2	Omni	—	—	—	—
229	Flood Light	277	277	Flood Light to illuminate the Apron	0.9	1 1 1	0.2	Omni	—	—	—	—
230	Beacon	278	278	Generic Beacon Light	0.9	1 1 1	0.2	Omni	—	—	0.25	0.25
231	ID Beacon Light	279	279	Identification Beacon Light	0.9	1 1 1	0.2	Omni	—	—	0.25	0.25
232	RR Punct Light-XX		322	Red RR Punct Light where 300 ends in a letter Punct code. (NOTE: Red Omni flashing pattern is equivalent to the Inverter mode code for 300)	0.9	1 0 0	0.2	Omni	—	—	—	—
233	Double White Rotating 2sec Light	427	427	Double peak White 2sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.6	0.25
234	Double White Rotating 3sec Light	428	428	Double peak White 3sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.25	0.25
235	Double White Rotating 5sec Light	429	429	Double peak White 5sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.2	0.25
236	Double White Rotating 10sec Light	429	429	Double peak White 10sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.1	0.25
237	White Rotating 2sec Light	380	380	White 2 sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.6	0.25
238	White Rotating 3sec Light	381	381	White 3 sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.25	0.25
239	White Rotating 5sec Light	382	382	White 5 sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.2	0.25
240	White Rotating 10sec Light	448	448	White 10 sec Internal Rotating Beacon	0.9	1 1 1	0.2	Omni	—	—	0.1	0.25
241	Green Rotating 2sec Light	383	383	Green 2 sec Internal Rotating Beacon	0.9	0 1 0	0.2	Omni	—	—	0.6	0.25
242	Green Rotating 3sec Light	384	384	Green 3 sec Internal Rotating Beacon	0.9	0 1 0	0.2	Omni	—	—	0.25	0.25
243	Green Rotating 5sec Light	385	385	Green 5 sec Internal Rotating Beacon	0.9	0 1 0	0.2	Omni	—	—	0.2	0.25
244	Green Rotating 10sec Light	440	440	Green 10 sec Internal Rotating Beacon	0.9	0 1 0	0.2	Omni	—	—	0.1	0.25
245	Yellow Rotating 2sec Light	430	430	Yellow 2 sec Internal Rotating Beacon	0.9	1 1 0	0.2	Omni	—	—	0.6	0.25
246	Yellow Rotating 3sec Light	431	431	Yellow 3 sec Internal Rotating Beacon	0.9	1 1 0	0.2	Omni	—	—	0.25	0.25
247	Yellow Rotating 5sec Light	432	432	Yellow 5 sec Internal Rotating Beacon	0.9	1 1 0	0.2	Omni	—	—	0.2	0.25
248	Yellow Rotating 10sec Light	441	441	Yellow 10 sec Internal Rotating Beacon	0.9	1 1 0	0.2	Omni	—	—	0.1	0.25
249	Double White Flashing 2sec Light	433	433	Double peak White 2sec Internal Flashing Beacon	0.9	1 1 1	0.2	Omni	—	—	0.6	0.25
250	Double White Flashing 3sec Light	434	434	Double peak White 3sec Internal Flashing Beacon	0.9	1 1 1	0.2	Omni	—	—	0.25	0.25

Light Hierarchy	V2.0 Light Code	V2.1 Light Code	Light Code	Description	Intrn_dpt. normalized	Color normalized	Directionality	AMI Th. Hor. (degrees)	AMI Th. Vert. (degrees)	Intrn_dpt. Fe's normalized	Frequency (Hz)	Duty Cycle normalized	
251	Double White Flashing 5sec Light	435	435	435	Double peak White 5sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.2	0.22
252	Double White Flashing 10sec Light	442	442	442	Double peak White 10sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.1	0.22
253	White Flashing 2sec Light	256	256	256	White 2 sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.8	0.22
254	White Flashing 3sec Light	257	257	257	White 3 sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.22	0.22
255	White Flashing 5sec Light	258	258	258	White 5 sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.2	0.22
256	White Flashing 10sec Light	448	448	448	White 10 sec Intermal Flashing Beacon	0.9	1 1 1	Omni	—	—	—	0.1	0.22
257	Green Flashing 2sec Light	259	259	259	Green 2 sec Intermal Flashing Beacon	0.9	0 1 0	Omni	—	—	—	0.8	0.22
258	Green Flashing 3sec Light	290	290	290	Green 3 sec Intermal Flashing Beacon	0.9	0 1 0	Omni	—	—	—	0.22	0.22
259	Green Flashing 5sec Light	291	291	291	Green 5 sec Intermal Flashing Beacon	0.9	0 1 0	Omni	—	—	—	0.2	0.22
260	Green Flashing 10sec Light	443	443	443	Green 10 sec Intermal Flashing Beacon	0.9	0 1 0	Omni	—	—	—	0.1	0.22
261	Yellow Flashing 2sec Light	436	436	436	Yellow 2 sec Intermal Flashing Beacon	0.9	1 1 0	Omni	—	—	—	0.8	0.22
262	Yellow Flashing 3sec Light	437	437	437	Yellow 3 sec Intermal Flashing Beacon	0.9	1 1 0	Omni	—	—	—	0.22	0.22
263	Yellow Flashing 5sec Light	438	438	438	Yellow 5 sec Intermal Flashing Beacon	0.9	1 1 0	Omni	—	—	—	0.2	0.22
264	Yellow Flashing 10sec Light	444	444	444	Yellow 10 sec Intermal Flashing Beacon	0.9	1 1 0	Omni	—	—	—	0.1	0.22
265	Docking System	292	292	292	Generic Docking System Light	0.9	1 0 0	Omni	—	—	—	—	—
266	Amber Light	293	293	293	Amber Docking System Light	0.9	1 0 0	Omni	—	—	—	—	—
267	Green Light	294	294	294	Green Docking System Light	0.9	0 1 0	Omni	—	—	—	—	—
268	Red Light	295	295	295	Red Docking System Light	0.9	1 0 0	Omni	—	—	—	—	—
269	Obstruction	296	296	296	Generic Obstruction Light - A red Light indicating the presence of an object which is dangerous to an aircraft in flight.	0.55	1 0 0	Omni	—	—	—	0.8	0.22
270	Flashing Light	297	297		Red Obstruction flashing Light (depreciated in COB v3.2)	0.55	1 0 0	Omni	—	—	—	0.8	0.22
271	Hi Intensity Light	298	298		Red Hi-Intensity obstruction Light (depreciated in COB v3.2)	0.9	1 0 0	Omni	—	—	—	0.8	0.22
272	Runway	299	299	299	Generic Runway Light	0.9	1 1 1	Omni	—	—	—	—	—
273	Approach System	300	300	300	Generic Airport Approach Lighting Systems	0.9	1 1 1	Dir	75	75	—	—	—
274	Barrette	301	301	301	Generic Barrette Light	0.9	1 1 1	Dir	75	75	—	—	—
275	Red Light	302	302	302	Red barrette Light	0.9	1 0 0	Dir	75	75	—	—	—
276	White Light	303	303	303	White barrette Light	0.9	1 1 1	Dir	75	75	—	—	—
277	Green Light	455	455	455	Green barrette Light	0.9	0 1 0	Dir	75	75	—	—	—
278	Circling Guidance Light	304	304	304	Circling Guidance Light which helps on a circling approach	0.9	1 1 1	Dir	75	75	—	—	—
279	Landing Marking Light	305	305	305	Marking Lights that illuminate any markings that need to be visible on the runway in low visibility	0.9	1 1 1	Omni	—	—	—	—	—
280	Lead-in Light	306	306	306	LDIN - lead-in Light system Lights	0.9	1 1 1	Dir	80	110	—	—	—
281	Optical Landing System	307	307	307	Optical landing system Lights	0.9	1 1 1	Omni	—	—	—	—	—
282	High Intensity Light	308	308	308	High intensity approach Light	0.9	1 1 1	Dir	75	75	—	—	—
283	Low Intensity Light	309	309	309	Low intensity approach Light	0.55	1 1 1	Dir	75	75	—	—	—
284	OBIAL Light	310	310	310	Omni directional approach Light	0.9	1 1 1	Omni	—	—	—	—	—
285	PAPI	311	311	311	Generic Precision approach path indicator. Provides visual glide slope indication using a single row of two or four Light Units.	0.95	1 1 1	Dir	75	10	—	—	—
286	PAPI's Glow Light	312	312	312	Abbreviated Precision Approach Path indicator closest to runway	0.95	1 1 1	Dir	75	10	—	—	—
287	PAPI's Far Light	313	313	313	Abbreviated Precision Approach Path indicator farthest to runway	0.95	1 1 1	Dir	75	10	—	—	—
288	TypeA Light	314	314	314	PAPI A (farthest from runway)	0.95	1 1 1	Dir	75	10	—	—	—
289	TypeB Light	315	315	315	PAPI B (3rd from runway)	0.95	1 1 1	Dir	75	10	—	—	—
290	TypeC Light	316	316	316	PAPI C (2nd from runway)	0.95	1 1 1	Dir	75	10	—	—	—
291	TypeD Light	317	317	317	PAPI D (Closest from runway)	0.95	1 1 1	Dir	75	10	—	—	—
292	RAIL Light	318	318	318	Runway alignment indicator Lights	0.9	1 1 1	Dir	75	75	—	—	0.22
293	REIL Light	319	319	319	Runway End Identifier Lights	0.95	1 1 1	Dir	75	75	—	2	0.1
294	SEL	320	320	320	Generic Sequence Flashing Lights	0.9	1 1 1	Dir	75	75	—	2	0.1
295	CATx	321	321	321	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1
296	CATx	322	322	322	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1
297	CALVERTx	323	323	323	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1
298	CALVERTx	324	324	324	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1
299	ALSP-1	325	325	325	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1
400	ALSP-8	326	326	326	Approach Lighting System with sequence of flashing	0.9	1 1 1	Dir	75	75	—	2	0.1

Light Hierarchy	V0.0 Light Code	V0.1 Light Code	Light Code	Description	Intrn_dfc_normalized	Color normalized hex	Directionality (open)	Altitude (feet)	Altitude (meters)	Intrn_dfc_Res normalized	Frequency (Hz)	Alt_Cycle normalized
SSALF	327	327	327	Approach Lighting System with sequenced flashing	0.9	11111	Dr	75	75	—	2	0.1
SSALR	328	328	328	Approach Lighting System with sequenced flashing	0.9	11111	Dr	75	75	—	2	0.1
MALSF	329	329	329	Approach Lighting System with sequenced flashing	0.9	11111	Dr	75	75	—	2	0.1
MALSR	330	330	330	Approach Lighting System with sequenced flashing	0.9	11111	Dr	75	75	—	2	—
VASI	331	331	331	Generic Visual Approach Slope Indicator System (VASI)	0.9	11111	Dr	75	10	—	—	—
2bar	332	332	332	Generic 2 Bar Component VASI	0.9	11111	Dr	75	10	—	—	—
First Light	333	333	333	2-Bar VASI (1st bar closest to threshold)	0.9	11111	Dr	75	10	—	—	—
Second Light	334	334	334	2-Bar VASI (2nd bar furthest from threshold)	0.9	11111	Dr	75	10	—	—	—
3bar	335	335	335	Generic 3 Bar component VASI	0.9	11111	Dr	75	10	—	—	—
First Light	336	336	336	3-Bar VASI (1st bar closest to threshold)	0.9	11111	Dr	75	10	—	—	—
Second Light	337	337	337	3-Bar VASI (2nd bar in between 1st and 3rd)	0.9	11111	Dr	75	10	—	—	—
Third Light	338	338	338	3-Bar VASI (3rd bar furthest from threshold)	0.9	11111	Dr	75	10	—	—	—
LCVASI Light	339	339	339	Low-cost VASI Light	0.9	11111	Dr	75	10	—	—	—
Typical Light	340	340	340	PVASI (pulsing Light)	0.9	11111	Dr	75	10	—	—	—
Typical	341	341	341	Generic T Shaped VASI (TVASI)	0.9	11111	Dr	75	10	—	—	—
Flydown Light	342	342	342	Fly Down Light	0.9	11111	Dr	75	7	—	—	—
Wing Bar Light	343	343	343	TVASI wing bar Light	0.9	11111	Dr	75	10	—	—	—
2.50 Degree	344	344	344	Generic 2.50 degree TVASI	0.9	11111	Dr	75	2.5	—	—	—
Fly-Up1 Light	345	345	345	TVASI Fly-up 1 (closest to Wing Bar) for 2.5 degree Glide slope	0.9	11111	Dr	75	2.5	—	—	—
Fly-Up2 Light	346	346	346	TVASI Fly-up 2 (closest to Wing Bar) for 2.5 degree Glide slope	0.9	11111	Dr	75	2.1666	—	—	—
Fly-Up3 Light	347	347	347	TVASI Fly-up 3 (furthest to Wing Bar) for 2.5 degree Glide slope	0.9	11111	Dr	75	2.3334	—	—	—
2.75 Degree	348	348	348	Generic 2.75 degree TVASI	0.9	11111	Dr	75	2.75	—	—	—
Fly-Up1 Light	349	349	349	TVASI Fly-up 1 (closest to Wing Bar) for 2.75 degree Glide slope	0.9	11111	Dr	75	2.75	—	—	—
Fly-Up2 Light	350	350	350	TVASI Fly-up 2 (closest to Wing Bar) for 2.75 degree Glide slope	0.9	11111	Dr	75	2.6666	—	—	—
Fly-Up3 Light	351	351	351	TVASI Fly-up 3 (furthest to Wing Bar) for 2.75 degree Glide slope	0.9	11111	Dr	75	2.9334	—	—	—
3.00 Degree	352	352	352	Generic 3.00 degree TVASI	0.9	11111	Dr	75	3	—	—	—
Fly-Up1 Light	353	353	353	TVASI Fly-up 1 (closest to Wing Bar) for 3.00 degree Glide slope	0.9	11111	Dr	75	3	—	—	—
Fly-Up2 Light	354	354	354	TVASI Fly-up 2 (closest to Wing Bar) for 3.00 degree Glide slope	0.9	11111	Dr	75	2.9166	—	—	—
Fly-Up3 Light	355	355	355	TVASI Fly-up 3 (furthest to Wing Bar) for 3.00 degree Glide slope	0.9	11111	Dr	75	2.9334	—	—	—
3.25 Degree	356	356	356	Generic 3.25 degree TVASI	0.9	11111	Dr	75	3.25	—	—	—
Fly-Up1 Light	357	357	357	TVASI Fly-up 1 (closest to Wing Bar) for 3.25 degree Glide slope	0.9	11111	Dr	75	3.25	—	—	—
Fly-Up2 Light	358	358	358	TVASI Fly-up 2 (closest to Wing Bar) for 3.25 degree Glide slope	0.9	11111	Dr	75	3.1666	—	—	—
Fly-Up3 Light	359	359	359	TVASI Fly-up 3 (furthest to Wing Bar) for 3.25 degree Glide slope	0.9	11111	Dr	75	3.3334	—	—	—
3.50 Degree	360	360	360	Generic 3.5 degree TVASI	0.9	11111	Dr	75	3.5	—	—	—
Fly-Up1 Light	361	361	361	TVASI Fly-up 1 (closest to Wing Bar) for 3.5 degree Glide slope	0.9	11111	Dr	75	3.5	—	—	—
Fly-Up2 Light	362	362	362	TVASI Fly-up 2 (closest to Wing Bar) for 3.5 degree Glide slope	0.9	11111	Dr	75	3.4166	—	—	—
Fly-Up3 Light	363	363	363	TVASI Fly-up 3 (furthest to Wing Bar) for 3.5 degree Glide slope	0.9	11111	Dr	75	3.3334	—	—	—
3.75 Degree	364	364	364	Generic 3.75 degree TVASI	0.9	11111	Dr	75	3.75	—	—	—
Fly-Up1 Light	365	365	365	TVASI Fly-up 1 (closest to Wing Bar) for 3.75 degree Glide slope	0.9	11111	Dr	75	3.75	—	—	—
Fly-Up2 Light	366	366	366	TVASI Fly-up 2 (closest to Wing Bar) for 3.75 degree Glide slope	0.9	11111	Dr	75	3.6666	—	—	—
Fly-Up3 Light	367	367	367	TVASI Fly-up 3 (furthest to Wing Bar) for 3.75 degree Glide slope	0.9	11111	Dr	75	3.9334	—	—	—
4.00 Degree	368	368	368	Generic 4.00 degree TVASI	0.9	11111	Dr	75	4	—	—	—
Fly-Up1 Light	369	369	369	TVASI Fly-up 1 (closest to Wing Bar) for 4.00 degree Glide slope	0.9	11111	Dr	75	4	—	—	—
Fly-Up2 Light	370	370	370	TVASI Fly-up 2 (closest to Wing Bar) for 4.00 degree Glide slope	0.9	11111	Dr	75	3.9166	—	—	—
Fly-Up3 Light	371	371	371	TVASI Fly-up 3 (furthest to Wing Bar) for 4.00 degree Glide slope	0.9	11111	Dr	75	3.9334	—	—	—
Centerline	372	372	372	Generic runway centerline Light	0.9	11111	Bi-Dr	75	75	—	—	—
Red Light	373	373	373	Unidirectional Red runway centerline Light	0.9	11010	Dr	75	75	—	—	—
White Light	374	374	374	Unidirectional White runway centerline Light	0.9	11111	Dr	75	75	—	—	—
White White Light	375	375	375	Bidirectional White runway centerline Light	0.9	11111	Bi-Dr	75	75	—	—	—
White Red Light	376	376	376	Bidirectional White Red runway centerline Light	0.9	11111	Bi-Dr	75	75	—	—	—

Light Hierarchy	V2.0 Light Code	V3.1 Light Code	Light Code	Description	In Rn dty (normalized)	Co d R (normalized (cat))	Directomality type	AM th. hor (degrees)	AM th. Vert (degrees)	In Rn dty. Res (normalized)	Frequency (Hz)	On V. Cycle (normalized)
Red Red Light		311	311	Directional Red Runway Centerline Light	0.9	1 0 0	2i-Qr	75	75	--	--	--
Edge	377	377	377	Generic Runway Edge Lights	0.9	1 1 1	2i-Qr	180	180	--	--	--
White Light	378	378	378	Unidirectional White Edge Light	0.9	1 1 1	Dr	180	180	--	--	--
Amber Light	379	379	379	Unidirectional Amber Edge Light	0.9	1 0.6 0	Dr	180	180	--	--	--
Red Light	380	380	380	Unidirectional Red Edge Light	0.9	1 0 0	Dr	180	180	--	--	--
Blue Light	381	381	381	Unidirectional Blue Edge Light	0.9	0 0 1	Dr	180	180	--	--	--
White White Light	382	382	382	Directional White Edge Light	0.9	1 1 1	2i-Qr	180	180	--	--	--
White Amber Light	383	383	383	White-Amber Edge Light	0.9	1 1 1	2i-Qr	180	180	--	--	--
White Red Light	384	384	384	White-Red Edge Light	0.9	1 1 1	2i-Qr	180	180	--	--	--
White Blue Light	385	385	385	White-Blue Edge Light	0.9	1 1 1	2i-Qr	180	180	--	--	--
Amber Amber Light	386	386	386	Directional Amber Edge Light	0.9	1 0.6 0	2i-Qr	180	180	--	--	--
Amber Red Light	387	387	387	Amber-Red Edge Light	0.9	1 0.6 0	2i-Qr	180	180	--	--	--
Amber Blue Light	388	388	388	Amber-Blue Edge Light	0.9	1 0.6 0	2i-Qr	180	180	--	--	--
Blue Red Light	389	389	389	Blue-Red Edge Light	0.9	0 0 1	2i-Qr	180	180	--	--	--
Red Red Light	390	390	390	Directional Red Edge Light	0.9	1 0 0	2i-Qr	180	180	--	--	--
Blue Blue Light	391	391	391	Directional Blue Edge Light	0.9	0 0 1	2i-Qr	180	180	--	--	--
End Wing Light	392	392	392	Runway End Wing Lights	0.9	1 0 0	Dr	180	180	--	--	--
End Light	393	393	393	Runway End Lights	0.9	1 0 0	Dr	180	180	--	--	--
Flood Light	394	394	394	Runway Flood Lights	0.9	1 1 1	Omni	--	--	--	--	--
Chevron	395	395	395	Generic Chevron Light - A light which indicates runway over runways	0.9	1 0.6 0	Dr	180	90	--	--	--
Amber Light	396	396	396	Amber chevron Light	0.9	1 0.6 0	Dr	180	90	--	--	--
Blue Light	397	397	397	Blue chevron Light	0.9	0 0 1	Dr	180	90	--	--	--
Red Light	398	398	398	Red chevron Light	0.9	1 0 0	Dr	180	90	--	--	--
Threshold Wing Light	399	399	399	Threshold wing lights	0.9	0 1 0	Dr	180	180	--	--	--
Threshold Light	400	400	400	Runway threshold lights used to identify the landing threshold of the runway	0.9	0 1 0	Dr	180	180	--	--	--
Touchdown Zone Light	401	401	401	Touchdown Zone Lights used to identify the appropriate landing area on the runway after the threshold	0.9	1 1 1	Dr	180	180	--	--	--
LAPSO Light	402	402	402	Land and Hold Short Operations Light: runway intersecting stop lights	0.9	1 0.6 0	Omni	--	--	--	--	--
taxiway	403	403	403	Generic Airport Taxiway Lights	0.9	0 0 1	Omni	--	--	--	--	--
Apron Entrance Light	404	404	404	Apron Entrance Light which indication area where taxi enters apron area	0.9	0 0 1	Omni	--	--	--	--	--
CAI 4th Hold Bar Light	405	405	405	Category III Hold Bar Light	0.9	0 1 0	Dr	180	180	--	--	--
Centerline	406	406	406	Generic Centerline Taxiway Lights	0.9	0 1 0	Dr	90	110	--	--	--
Aligned Light	407	407	407	Aligned Light for a straight sequence of a taxiway	0.9	0 1 0	Dr	90	110	--	--	--
Curved Light	408	408	408	Curved Lights for a curved sequence of a taxiway	0.9	0 1 0	Dr	90	110	--	--	--
Edge	409	409	409	Generic Taxiway edge Lights	0.9	0 0 1	Omni	--	--	--	--	--
Blue Light	425	425	425	Blue Taxi edge Light	0.9	0 0 1	Omni	--	--	--	--	--
White Light	426	426	426	White Taxi edge Light	0.9	1 1 1	Omni	--	--	--	--	--
High-speed	410	410	410	Generic Taxiway high speed area Lights	0.9	1 0.6 0	Dr	90	110	--	--	--
Amber Light	411	411	411	Amber high speed Lights	0.9	1 0.6 0	Dr	90	110	--	--	--
Green Light	412	412	412	Green high-speed Lights	0.9	0 1 0	Dr	90	110	--	--	--
Lead-on	413	413	413	Generic Lead-On Light	0.9	0 1 0	Omni	--	--	--	--	--
Green Light	458	458	458	Green Lead-On Light	0.9	0 1 0	Omni	--	--	--	--	--
Yellow Light	490	490	490	Yellow Lead-On Light	0.9	1 1 0	Omni	--	--	--	--	--
Lead-off	491	491	491	Generic Lead-Off Light	0.9	0 1 0	Omni	--	--	--	--	--
Green Light	492	492	492	Green Lead-Off Light	0.9	0 1 0	Omni	--	--	--	--	--
Yellow Light	493	493	493	Yellow Lead-Off Light	0.9	1 1 0	Omni	--	--	--	--	--
No-entry Light	414	414	414	No entry zone Lights	0.9	1 0 0	Omni	--	--	--	--	--
Runway Guard	415	415	415	Runway guard Lights	0.9	1 1 1	Omni	--	--	--	--	--
Stop Bar Light	416	416	416	Stop Bar Lights	0.9	1 0 0	Dr	180	180	--	--	--
Clearance	417	417	417	Generic Clearance bar Light. They are located at "hold short" positions on taxiways in order to increase the visibility of Unidirectional Taxiway Clearance Light (used when the hold is intended for one direction only)	0.9	1 1 0	Dr	?	?	--	--	--
Unidirectional Light			512		0.9	0 1 0	Dr	?	?	--	--	--

	Light Hierarchy	V3.0 Light Code	V3.1 Light Code	Light Code	Description	In bin alt. normalized	Color normalized	Directionality	Altitude (m)	Altitude (ft)	Altitude (ft) normalized	Frequency (Hz)	Duty Cycle normalized
501	Bi-directional Light			512	Bi-directional Taxiway Clearance Light (used when the hold is intended for two directions)	0.9	1 1 0	Di	7	7	—	—	—
502	Guard	418	418	418	Generic RGL (Runway Guard Light) is used to enhance the visibility of taxiway holding positions on an airport	0.9	1 1 1	Omni	—	—	—	—	—
503	Type1 Light	419			(depreciated in CDD v3.1)	0.9	1 1 1	Omni	—	—	—	—	—
504	Type2 Light	420			(depreciated in CDD v3.1)	0.9	1 1 1	Omni	—	—	—	—	—
505	Type3 Light	421			(depreciated in CDD v3.1)	0.9	1 1 1	Omni	—	—	—	—	—
506	Type4 Light	422			(depreciated in CDD v3.1)	0.9	1 1 1	Omni	—	—	—	—	—
507	Wind Indicator Light	423	423	423	Wind indicator Light	0.9	1 1 1	Omni	—	—	—	—	—
508	Windsock Light	424	424	424	Windsock Light used to illuminate the windsock in poor visibility	0.9	1 1 1	Omni	—	—	—	—	—
509	Heliport	457	457	457	Generic Heliport Lights	0.9	0 0 1	Omni	—	—	—	—	—
510	Approach System	455	455	455	Generic Heliport Approach System Lights	0.9	0 1 0	Di	90	110	—	—	—
511	Landing Marking	460	460	460	Generic Landing Marking Light on Heliport Approach System	0.9	1 1 1	Di	75	10	—	—	—
512	Amber Light	465	465	465	Heliport Approach Landing Marking Amber Light	0.9	1 1 1	Di	75	10	—	—	—
513	Green Light	463	463	463	Heliport Approach Landing Marking Green Light	0.9	1 1 1	Di	75	10	—	—	—
514	Red Light	464	464	464	Heliport Approach Landing Marking Red Light	0.9	1 1 1	Di	75	10	—	—	—
515	Edge	459	459	459	Generic Heliport Edge Lights	0.9	0 0 1	Omni	—	—	—	—	—
516	White White Light	462	462	462	White White Heliport Edge Light	0.9	0 0 1	Omni	—	—	—	—	—
517	White Light	461	461	461	White Heliport Edge Light	0.9	1 1 1	Omni	—	—	—	—	—

14. Annex M: CDB Directory Naming and Structure

Formerly Appendix M, Volume 2 of the OGC CDB Best Practice

With CDB version 3.2 (prior to the submission into the OGC), Appendix M was used to present the complete list of names allowed to construct the directories of the CDB. As of version 3.2 (as submitted into the OGC standards process), the appendix has been replaced by a combination of folder hierarchy and metadata files and controlled vocabularies delivered with the CDB Distribution Package.

The /CDB folder hierarchy provides a complete list of directory and file name patterns of the CDB; it summarizes the structure of the CDB presented in chapter 3, Volume 1: Core. The following files are necessary to expand the patterns:

- /CDB/Metadata/Feature_Data_Dictionary.xml provides the list of directory names associated with feature codes;
- /CDB/Metadata/Moving_Model_Codes.xml provides the list of names for DIS Entity Kinds, Domains, and Categories; and
- /CDB/Metadata/DIS_Country_Codes.xml contains the list of DIS Country Names.

Together, these files provide all the information required to build the names of all directories permitted by the CDB standard.

15. Annex O: List of Texture Component Selectors

Formerly Appendix O, Volume 2 of the OGC CDB Best Practice

The following table provides the list of codes to use to build CDB model texture filenames.

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
002 – Month	001	January
	002	February
	003	March
	004	April
	005	May
	006	June
	007	July
	008	August
	009	September
	010	October
	011	November
	012	December
003 – Season	001	Spring
	002	Summer
	003	Autumn
	004	Winter
004 – Uniform Paint Scheme	001	Grey
	002	White
	003	Green
	004	Black
	005	Beige
	006	Blue
	007	Red
	008	Yellow
	009	Brown
	010	Pink
	011	Purple
	012	Burgundy
	013	Orange
	014	Light Blue
	015	Khaki
	016	Dark Grey
	017	Amber
	018	Gold
	019	Silver
	020	Copper
005 – Camouflage	001	Desert

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
Paint Scheme	002	Winter
	003	Forest
	004	Generic
	005	Urban
006 – Airline Paint Scheme	001	AAH Aloha Airlines Inc.
	002	AAL American Airlines Inc.
	003	AAR Asiana Airlines Inc.
	004	AAW Afriqiyah Airways
	005	ABR Air Contractors (UK) Limited
	006	ACA Air Canada
	007	ACI Air Caledonie International
	008	ADR Adria Airways - The Airline of Slovenia
	009	AEA Air Europa Lineas Aereas, S.A.
	010	AEE Aegean Airlines S.A.
	011	AEW Aerosvit Airlines
	012	AFG Ariana Afghan Airlines
	013	AFL Aeroflot Russian Airlines
	014	AFR Air France
	015	AGN Air Gabon
	016	AHY Azerbaijan Hava Yollary
	017	AIC Air-India Limited
	018	AIZ Arkia - Israeli Airlines Ltd
	019	AJM Air Jamaica
	020	ALK SriLankan Airlines Limited
	021	AMC Air Malta p.l.c.
	022	AML Air Malawi Limited
	023	AMU Air Macau Company Limited
	024	AMX Aeromexico
	025	ANA All Nippon Airways Co. Ltd.
	026	ANG Air Niugini Pty Limited
	027	ANS Air Nostrum L.A.M.S.A.
	028	ANZ Air New Zealand Limited
	029	ARG Aerolineas Argentinas
	030	ASA Alaska Airlines Inc.
	031	ATC Air Tanzania Company Ltd.
	032	AUA Austrian Airlines, Osterreichische
	033	AUI Ukraine International Airlines
	034	AUT Cielos del Sur S.A.
	035	AVA Aerovias del Continente Americano – Avianca
	036	AVN Air Vanuatu (Operations) Limited
	037	AWE America West Airlines Inc.
	038	AZA Alitalia - Linee Aeree Italiane
	039	AZW Air Zimbabwe (Pvt) Ltd.
	040	BAG dba Luftfahrtgesellschaft mbH
	041	BAW British Airways p.l.c.
	042	BBC Biman Bangladesh Airlines
	043	BCS European Air Transport
	044	BCY Cityjet

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	045	BEE Jersey European Airways Limited
	046	BER Air Berlin GmbH & Co. Luftverkehrs KG
	047	BKP Bangkok Airways Co. Ltd.
	048	BLF Blue1 Oy
	049	BLV Bellview Airlines Ltd.
	050	BMA British Midland Airways Ltd.
	051	BOT Air Botswana Corporation
	052	BPA Blue Panorama Airlines S.p.A.
	053	BRA SAS Braathens AS
	054	BRU Belavia
	055	BRZ Samara Airlines
	056	BWA BWIA West Indies Airways Limited
	057	CAL China Airlines
	058	CAW Comair Ltd.
	059	CCA Air China Limited
	060	CDG Shandong Airlines
	061	CES China Eastern Airlines
	062	CHH Hainan Airlines Company Limited
	063	CLH Lufthansa CityLine GmbH
	064	CLX Cargolux Airlines International S.A.
	065	CMI Continental Micronesia, Inc.
	066	CMP Compania Panamena de Aviacion, S.A.
	067	CNW China Northwest Airlines
	068	COA Continental Airlines, Inc.
	069	CPA Cathay Pacific Airways Ltd.
	070	CPN Caspian Airlines Service Company Ltd.
	071	CRL CORSAIR
	072	CSA Czech Airlines a.s., CSA
	073	CSN China Southern Airlines
	074	CTN Croatia Airlines
	075	CUB Cubana de Aviacion S.A.
	076	CXA Xiamen Airlines
	077	CYH China Yunnan Airlines
	078	CYP Cyprus Airways Limited
	079	DAH Air Algerie
	080	DAL Delta Air Lines Inc.
	081	DAN Maersk Air A.S.
	082	DAT Delta Air Transport N.V.
	083	DHK DHL Air Limited
	084	DHX DHL International E.C.
	085	DLH Deutsche Lufthansa AG
	086	DNM Denim Air
	087	DTA TAAG - Linhas Aereas de Angola
	088	EIN Aer Lingus Limited
	089	ELG ALPI Eagles S.p.A.
	090	ELL Estonian Air
	091	ELY El Al Israel Airlines Ltd.
	092	ETD Etihad Airways

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	093	ETH Ethiopian Airlines Enterprise
	094	EVA EVA Airways Corporation
	095	EWG Eurowings AG
	096	FCN Falcon Air AB
	097	FDX FedEx
	098	FIN Finnair Oyj
	099	FJI Air Pacific Ltd.
	100	GBL GB Airways Ltd.
	101	GEC Lufthansa Cargo AG
	102	GFA Gulf Air Company G.S.C.
	103	GHA Ghana Airways Corp.
	104	GIA Garuda Indonesia
	105	HCY Helios Airways
	106	HDA Hong Kong Dragon Airlines Limited
	107	HEJ Hellas Jet S.A.
	108	HHN Hahn Air Lines
	109	HLF Hapag Lloyd Fluggesellschaft
	110	HZL Hazelton Airlines dba Regional Express
	111	IAC Indian Airlines
	112	IAW Iraqi Airways
	113	IBB Binter Canarias
	114	IBE Iberia - Lineas Aereas de Espana
	115	ICE Icelandair
	116	ICL C.A.L. Cargo Airlines Ltd.
	117	IRA Iran Air
	118	IRC Iran Aseman Airlines
	119	IRM Mahan Airlines
	120	ISR Israil Airlines and Tourism Ltd.
	121	ISS Meridiana S.p.A.
	122	IYE Yemenia - Yemen Airways
	123	JAI Jet Airways (India) Limited
	124	JAL Japan Airlines International Co., Ltd.
	125	JAT Jat Airways
	126	JAZ JALways Co. Ltd.
	127	JKK Spanair S.A.
	128	KAC Kuwait Airways
	129	KAL Korean Air Lines Co. Ltd.
	130	KHA Kitty Hawk Aircargo, Inc.
	131	KLM KLM Royal Dutch Airlines
	132	KOR Air Koryo
	133	KQA Kenya Airways
	134	KRP Carpatair S.A.
	135	LAA Libyan Arab Airlines
	136	LAM LAM - Linhas Aereas de Mocambique
	137	LAN Lan Airlines S.A.
	138	LAP TAM - Transportes Aereos del
	139	LBC Albanian Airlines MAK S.H.P.K.
	140	LBH Laker Airways (Bahamas) Limited

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	141	LCO Lan Chile Cargo S.A.
	142	LDA Lauda Air Luftfahrt AG
	143	LDI Lauda Air S.p.A.
	144	LGL Luxair
	145	LIL Lithuanian Airlines
	146	LLB Lloyd Aereo Boliviano S.A. (LAB)
	147	LOT LOT - Polish Airlines
	148	LPE Lan Peru S.A.
	149	LRC Lineas Aereas Costarricenses S.A.
	150	LTU LTU International Airways
	151	LXR Air Luxor, S.A.
	152	MAH Malev Hungarian Airlines Limited
	153	MAK Macedonian Airlines
	154	MAS Malaysia Airline System Berhad
	155	MAU Air Mauritius
	156	MAZ Zambian Airways
	157	MDG Air Madagascar
	158	MEA Middle East Airlines AirLiban
	159	MGL MIAT - Mongolian Airlines
	160	MGX Montenegro Airlines
	161	MLD Air Moldova
	162	MPX Aeromexpress S.A. de C.V.
	163	MRS Air Marshall Islands, Inc.
	164	MSR Egyptair
	165	MXA Compania Mexicana de Aviacion
	166	NBK Albarka Air Services Ltd.
	167	NCA Nippon Cargo Airlines
	168	NMB Air Namibia
	169	NTW Nationwide Airlines (Pty) Ltd.
	170	NWA Northwest Airlines, Inc.
	171	OAL Olympic Airlines
	172	OAS Oman Aviation Services Co. (SAOG)
	173	PAL Philippine Airlines, Inc.
	174	PAO Polynesian Limited
	175	PGA Portugalia - Companhia Portuguesa de
	176	PIA Pakistan International Airlines
	177	PLK Pulkovo Aviation Enterprise
	178	PNW Palestinian Airlines
	179	PUA Pluna Lineas Aereas Uruguayas S.A.
	180	QFA Qantas Airways Ltd.
	181	QTR Qatar Airways(Q.C.S.C)
	182	RAM Royal Air Maroc
	183	RBA Royal Brunei Airlines Sdn. Bhd.
	184	REU Air Austral
	185	RJA Royal Jordanian
	186	ROT TAROM - Transporturile Aeriene Romane
	187	RSN Royal Swazi National Airways Corp.
	188	RWD Rwandair Express

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	189	SAA South African Airways
	190	SAS Scandinavian Airlines System (SAS)
	191	SAT SATA - Air Acores
	192	SBI Siberia Airlines
	193	SER Aero California
	194	SEY Air Seychelles Limited
	195	SFR Safair (Proprietary) Ltd.
	196	SIA Singapore Airlines Limited
	197	SKX Skyways AB
	198	SLA Sierra National Airlines
	199	SLK SilkAir (S) Pte. Ltd.
	200	SLM Surinam Airways Ltd.
	201	SNG Air Senegal International
	202	SOL Solomon Airlines
	203	SQC Singapore Airlines Cargo Pte. Ltd.
	204	SUD Sudan Airways Co. Ltd.
	205	SVA Saudi Arabian Airlines
	206	SWD Southern Winds S.A.
	207	SWR SWISS International Air Lines Ltd
	208	SYR Syrian Arab Airlines
	209	TAI Taca International Airlines, S.A.
	210	TAM TAM Linhas Aereas S.A.
	211	TAP TAP - Air Portugal
	212	TAR Tunisair
	213	TAY TNT Airways S.A.
	214	THA Thai Airways International Public
	215	THT Air Tahiti Nui
	216	THY Turkish Airlines Inc.
	217	TMA Trans-Mediterranean Airways
	218	TNA TransAsia Airways Corporation
	219	TSO Transaero Airlines
	220	TUA Turkmenistan Airlines
	221	UAE Emirates
	222	UAL United Airlines, Inc.
	223	UPS UPS
	224	USA US Airways, Inc.
	225	UYC Cameroon Airlines
	226	VAP Phuket Airlines Co., Ltd.
	227	VDA Volga-Dnepr Airline Joint Stock
	228	VIR Virgin Atlantic Airways Limited
	229	VLE Volare Airlines S.p.A.
	230	VLK Vladivostok Air JSC
	231	VRG Varig S.A.
	232	VSP Viacao Aerea Sao Paulo, S.A. (VASP)
	233	VTA Air Tahiti
	234	WIF Wideroe's Flyveselskap A.S.
	235	WNT Cargojet Airways Ltd.
	236	CRX Crossair

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	237	WJA WestJet Airlines Ltd.
	238	JAS Japan Air System
	239	NWW North West Airlines
	240	MEP Midwest Express Airlines
	241	TWA Trans World Airlines
	242	SAB Sabena
	243	TUI Tuninter
	244	SRT Trans Asian Airlines
	245	JBU JetBlue Airways
	246	TSC Air Transat
	247	SWG Sunwing Airlines
	248	FFM Firefly
	249	BVT Berjaya Air
	250	VLG Vueling Airlines
	251	SKY Skymark Airlines
	252	JST Jetstar Airways
	253	ABX ABX Air
	254	CQH Spring Airlines
	255	POE Porter Airlines
	256	EAQ Eastern Australia
	257	EZY EasyJet
	258	NLY Niki
	259	VOZ Virgin Australia
	260	KNA Kunming Airlines
	261	CSC Sichuan Airlines
	262	VRD Virgin America
	263	DKH Juneyao Airlines
	264	KEN Kenmore Air
	265	XAK Air Kenya
	266	NZM Mount Cook Airline
	267	FDA Fuji Dream Airlines
	268	TAE TAME (Línea Aérea del Ecuador)
	269	CFE BA CityFlyer
	270	JZA Jazz Aviation
	271	CSH Shanghai Airlines
	272	BEE Flybe
	273	TYR Tyrolean Airways
	274	SWA Southwest Airlines
	275	XME Australian Air Express
	276	BEL Brussels Airlines
	277	GCR Tianjin Airlines
	278	VOI Volaris
	279	ARA Arik Air
	280	LNI Lion Air
	281	RYR Ryanair
	282	SHU Aurora
	283	NIG Aero Contractors
	284	SCW Malmö Aviation

Texture Kind CS1 (Sxxx)	Texture Index CS2 (Txxx)	Description
	285	NAX Norwegian Air Shuttle
	286	RAR Air Rarotonga
	287	CJR Caverton Helicopters
	288	KZR Air Astana
	289	ROU Air Canada Rouge
	290	DWT Darwin Airline
	291	UTA UTair Aviation
	292	AZN Amaszonas
	293	FDB Flydubai
	294	UZB Uzbekistan Airways
	295	PGT Pegasus Airlines
	296	ABY Air Arabia
	297	AXB Air India Express
009 – Quarter	001	First quarter of the year
	002	Second quarter of the year
	003	Third quarter of the year
	004	Fourth quarter of the year
054 – Contaminant	001	Wet Surface
	002	Snowy Surface
	003	Icy Surface
	004	Slushy Surface
	005	Patchy Wet Surface
	006	Patchy Snowy Surface
	007	Patchy Icy Surface
	008	Patchy Sandy Surface
	009	Patchy Dirty Surface
	010	Volcanic Ash
	011	Patchy Volcanic Ash
055 – Skid Mark	001	Tire Mark

Examples:

- A geospecific City Hall especially decorated for the Halloween during the month (S002) of October (T010) could have a texture named Geocell_D301_S002_T010_LOD_UREF_RREF_City-Hall.rgb.
- The texture of a geotypical house used during the first (T001) quarter (S009) of the year could be named D501_S009_T001_Wxx_House.rgb.
- Similarly, the uniform (S004) grey (T001) texture used with a Cobra helicopter could be named D601_S004_T001_Wxx_Cobra.rgb.

- A 1024 by 1024 (W10) texture representing an M1A2 tank desert (T001) camouflage (S005) could be stored in a file named D601_S005_T001_W10_M1A2.rgb.
- An Airbus 380 model 800 operated by the Emirates (T221) Airlines (S006) could be stored in a file named D601_S006_T221_Wxx_A380-800.rgb.

Notes:

- Texture Kind 002 and 009 are complete; the number of months and quarters will not change.
- Texture Kind 004 will expand as new colors are added. Color names are defined here: <http://en.wiktionary.org/wiki/Appendix:Colors>.
- Texture Kind 005, the Camouflage Paint Scheme, follows a similar numbering scheme as the HLA's RPR-FOM Version 2 Draft 17. The list will expand as new camouflages are needed or new values added to the RPR-FOM.
- Texture Kind 006 will expand as ICAO assigns new airline acronyms.
- Texture Kind 054 and 055 will expand as new contaminants and skid marks are deemed necessary.

16. Annex Q: Table of Dataset Codes

Formerly Appendix Q in Volume 2 of the OGC CDB Best Practice.

The table below summarizes the CDB dataset codes along with their names and their applicability to the community 3.0 specification and the OGC standard, which is based on CDB version 3.2.

Dataset		Specification	
Name	Code	3.0	OGC
Elevation	001	√	√
MinMaxElevation	002	√	√
MaxCulture	003	√	√
Imagery	004	√	√
RMTtexture	005	√	√
RMDescriptor	006	√	√
Reserved	007		
Reserved	008		
Reserved	020		
GSFeature	100	√	√
GTFeature	101	√	√
GeoPolitical	102	√	√
VectorMaterial	200	√	√
RoadNetwork	201	√	√
RailRoadNetwork	202	√	√
PowerLineNetwork	203	√	√
HydrographyNetwork	204	√	√
GSMModelGeometry	300	√	√
GSMModelTexture	301	√	√
GSMModelSignature	302	√	√
GSMModelDescriptor	303	√	√
GSMModelMaterial	304		√
GSMModelInteriorGeometry	305		√
GSMModelInteriorTexture	306		√
GSMModelInteriorDescriptor	307		√
GSMModelInteriorMaterial	308		√
GSMModelCMT	309		√
T2DModelGeometry	310		√
GSMModelInteriorCMT	311		√
T2DModelCMT	312		√
NavData	400	√	√
Navigation	401	√	√

Dataset		Specification	
Name	Code	3.0	OGC
GTModelGeometry	500	√	√
	510		√
GTModelTexture	501	√	
	511		√
GTModelSignature	502	√	
	512		√
GTModelDescriptor	503	√	√
GTModelMaterial	504		√
GTModelCMT	505		√
GTModelInteriorGeometry	506		√
GTModelInteriorTexture	507		√
GTModelInteriorDescriptor	508		√
GTModelInteriorMaterial	509		√
GTModelInteriorCMT	513		√
MModelGeometry	600	√	√
MModelTexture	601	√	√
MModelSignature	602	√	
	606		√
MModelDescriptor	603	√	√
MModelMaterial	604		√
MModelCMT	605		√
Metadata	700		√
ClientSpecific	701		√
Reserved for CDB Extensions	9xx		

- Dataset Code is not used
- Dataset Code is in use
- Dataset Code is deprecated
- Dataset Code is reserved

17. Annex R: Derived Datasets within the CDB

By using Industry Standards throughout this document, the CDB Standard defines the means and mechanisms to populate all the simulation datasets without involving data duplication. However, there are situations where a specific dataset information type needs to be derived from another existing one in order to specialize further the information into another dataset type or form.

This consideration becomes a grey area where the off-line tools' capability and the run-time simulation clients' performance levels enforces this data derivation.

It is such a case with the Mip-Map data, Min-Max Elevation data, Tile Presence data, RCS data, and Raster Material data for example.

Source Dataset	Data Manipulation Description	Resulting Dataset(s)
Elevation Dataset	In order to produce the various Level Of Details within the Elevation Dataset, it is often necessary to over-sample or sub-sample a primary set of data values. Since those values within the LOD hierarchy may come from a single data source, the LODs can be seen as derived information which can better accommodate the client needs based on their performance level.	Elevation LODs
Elevation Dataset	For clients that need to compute line of sights (LOS) between simulation entities spread across a vast terrain area, it is imperative to have a fast way of knowing the minimum and maximum elevations within a tile without loading the entire elevation data grid. The min/max elevation dataset can be used to ensure a fast pre-determination of entities occultation state with the terrain. The min/max data is stored in the form of a quad-tree pyramid and is based on the area covered at the given depth level of the quad-tree. For example, for the maximum dataset the top will contain the maximum for the whole of the geocell, the next pyramid level contains maximum data for each the quarter geocells and so on. Similarly for the minimum the top represents the minimum for the whole of the geocell going down as for maximums. Currently the pyramid size is fixed and goes down to level 9 which covers areas that are approximately 256x256 meters square; note that the depth level	Min-Max Elevation

Source Dataset	Data Manipulation Description	Resulting Dataset(s)
	<p>can be modified to a finer or coarser level but level 9 is suggested as a reasonable compromise of performance vs. storage. A tool will pre-determine the minimum and maximum elevations within a geocell's elevations and generate the quad-trees described previously; note that the tool will use all of the elevation data that is present in the elevation dataset to determine the maximums or minimums in a given area. The tool will provide Min-Max values to client devices through the Min-Max Elevation datasets in the CDB.</p>	
<p>Vector Datasets (Point, Lineal and Areal Features)</p>	<p>The Max Culture Height data is produced for clients that need to compute line of sights (LOS) between simulation entities spread across a vast terrain area that take into account the maximum cultural feature heights. The dataset helps rapidly assess an intersection status of line-of-sight with cultural features. This dataset is derived from the Vector Datasets of the CDB for corresponding tiles. The storage is done via a quad-tree similar to that of the min/max elevation the top of the pyramid represents the height of the highest cultural feature in the dataset going down to a suggested depth level of 9.</p>	<p>Max Culture Height</p>
<p>3D Model (GT, GS, MM) Datasets</p>	<p>The polar diagram data (covering all aspect angles) of the RCS dataset for Geotypical, Geospecific or Moving Models cannot readily be computed at run-time due to the complex mathematical computing algorithms and resources required to determine the Electro-Magnetic Energy absorption levels by the model's materials, the corner reflections, the multi-path reflections, EM parameters (frequency, polarization) effects, and so on. Therefore, off-line COTS tools are used to analyze the 3D model geometry and its materials in order to produce the RCS dataset specifically for different frequencies and polarizations.</p>	<p>RCS (Radar Cross Section)</p>
<p>Vector Datasets</p>	<p>Since the material attribution is normally done in the vector data, a rasterization operation among</p>	<p>Raster Material</p>

Source Dataset	Data Manipulation Description	Resulting Dataset(s)
(Point, Lineal and Areal Features)	all features is required to come up with a raster grid of attributed materials.	

18. Annex S: Default Read and Write values for Simulator Client-Devices

As seen throughout this document, the CDB standard provides guidelines with respect to default values in cases where no data could be read from the CDB for requested datasets. Those default parameters are captured in a Metadata file within the CDB. The Table below summarizes all the Default Parameters Names and the suggested initial values to be used by client-devices. In cases where the default parameter would be missing altogether from `\CDB\Metadata\Defaults.xml`, Client-Devices shall use the “Default Value” found in the fourth column. A “Read” default refers to the value being assumed while reading the CDB data. A “Write” default refers to the value being written to the file when content-generation tools have partial source data.

Parameter Name	Dataset	Type	Default Value	R/W
Default Elevation-1	001 Elevation	float	0 m	R
Default Elevation-[2-99]	001 Elevation	float	0 m	R
Default_Primary_Elevation_Control	001_Elevation	integer	INSIDE (1)	R
Default_Subordinate_Elevation_Control	001_Elevation	integer	NO_ELEVATION (0)	R
Default Bathymetry	001 Elevation	float	0 m	R
Default Tide	001 Elevation	float	2.5 m	R
Default_MinElevation_CaseI	002_MinMaxElevation	float	Default Elevation-1	R
Default_MaxElevation_CaseI	002_MinMaxElevation	float	Default Elevation-1	R
Default_MinElevation_CaseII	002_MinMaxElevation	float	-400 m	R
Default_MaxElevation_CaseII	002_MinMaxElevation	float	8846 m	R
Default_MinElevation_CaseIII	002_MinMaxElevation	float	8846 m	W
Default_MaxElevation_CaseIII	002_MinMaxElevation	float	-400 m	W
Default_MaxCulture_CaseI	003_MaxCulture	float	600 m	R
Default_MaxCulture_CaseII	003_MaxCulture	float	0 m	R
Default VSTI_Y Mono	004 Imagery	float	0.5	R
Default VSTI_Y Red	004 Imagery	float	0.5	R
Default VSTI_Y Green	004 Imagery	float	0.5	R
Default VSTI_Y Blue	004 Imagery	float	0.5	R
Default VSTLM Mono	004 Imagery	float	0.0	R
Default VSTLM Red	004 Imagery	float	0.0	R
Default VSTLM Green	004 Imagery	float	0.0	R
Default VSTLM Blue	004 Imagery	float	0.0	R
Default Imagery Gamma	004 Imagery	float	1.0	R
Default_RoadNetwork_LTN	201_RoadNetwork	integer	2	R
Default_RailRoadNetwork_LTN	202_RailRoadNetwork	integer	1	R
Default_GSModelTexture_Gamma	301_GSModelTexture	float	1.0	R
Default_GSModelInteriorTexture_Ga	306_GSModelInteriorText	float	1.0	R

Parameter Name	Dataset	Type	Default Value	R/W
mma	ure			
Default_GTModelTexture_Gamma	511_GTModelTexture	float	1.0	R
Default_GTModelInteriorTexture_Gamma	507_GTModelInteriorTexture	float	1.0	R
Default_MModelTexture_Gamma	601_MModelTexture	float	1.0	R
Default Base Material		string	BM LAND-MOOR	R
Default_Material_Layer		integer	0	R
Default AO1		float	0.0	R
Default SCAL[x,y,z]		float	1.0	R
Default_TRF		integer	4	R