



OGC API - COMMON - PART 2: GEOSPATIAL DATA

STANDARD
Implementation

DRAFT

Version: 1.0.0rc1

Submission Date: 2029-03-30

Approval Date: 2029-03-30

Publication Date: 2029-03-30

Editor: Charles Heazel, Joan Masó, Jérôme Jacovella-St-Louis

Notice for Drafts: This document is not an OGC Standard. This document is distributed for review and comment. This document is subject to change without notice and may not be referred to as an OGC Standard.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

License Agreement

Use of this document is subject to the license agreement at <https://www.ogc.org/license>

Suggested additions, changes and comments on this document are welcome and encouraged. Such suggestions may be submitted using the online change request form on OGC web site: <http://ogc.standardtracker.org/>

Copyright notice

Copyright © 2025 Open Geospatial Consortium

To obtain additional rights of use, visit <https://www.ogc.org/legal>

Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

CONTENTS

| | | |
|------|--|------|
| I. | ABSTRACT | viii |
| II. | KEYWORDS | viii |
| III. | PREFACE | ix |
| IV. | SECURITY CONSIDERATIONS | x |
| V. | SUBMITTING ORGANIZATIONS | xi |
| VI. | SUBMITTERS | xi |
| VII. | ACKNOWLEDGEMENTS | xi |
| 1. | SCOPE | 2 |
| 2. | CONFORMANCE | 4 |
| | 2.1. Summary of conformance URLs | 5 |
| 3. | NORMATIVE REFERENCES | 7 |
| 4. | TERMS, DEFINITIONS AND ABBREVIATED TERMS | 10 |
| | 4.22. Abbreviated terms | 14 |
| 5. | CONVENTIONS | 17 |
| | 5.1. Identifiers | 17 |
| | 5.2. Link relations | 17 |
| | 5.3. Coordinate Reference Systems | 19 |
| | 5.4. Temporal instants and intervals | 19 |
| | 5.5. API definition | 20 |
| 6. | OVERVIEW | 23 |
| | 6.1. Collections | 23 |
| | 6.2. Data access mechanisms | 23 |
| | 6.3. Representation | 24 |
| | 6.4. UML Class Diagram | 25 |
| 7. | REQUIREMENTS CLASS “COLLECTIONS” | 28 |
| | 7.1. List of Collections Resource (/collections) | 29 |
| | 7.2. Collection Description Resource (/collections/{collectionId}) | 32 |
| | 7.3. OGC API – Records compliance | 40 |

| | |
|---|-----|
| 8. REQUIREMENTS CLASS “UNIFORM MULTI-DIMENSION COLLECTION” | 42 |
| 8.1. Uniform description of all dimensions | 42 |
| 8.2. Describing gridded dimensions | 43 |
| 9. REQUIREMENTS CLASSES FOR ENCODINGS | 48 |
| 9.1. Overview | 48 |
| 9.2. Requirements Class “HTML” | 48 |
| 9.3. Requirements Class “JSON” | 50 |
| 10. MEDIA TYPES | 53 |
| ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE | 55 |
| A.1. Introduction | 55 |
| A.2. Conformance Class Collections | 55 |
| A.3. Conformance Class Uniform Multi-Dimension Collection | 60 |
| A.4. Conformance Class JSON | 61 |
| A.5. Conformance Class HTML | 63 |
| ANNEX B (INFORMATIVE) CLASS MODEL AS TABLES | 65 |
| B.1. OGC API – Common package | 65 |
| ANNEX C (INFORMATIVE) GLOSSARY | 88 |
| ANNEX D (NORMATIVE) BACKUS-NAUR FORMS | 91 |
| D.1. BNF for URI | 91 |
| D.2. BNF for Date-Time | 92 |
| ANNEX E (NORMATIVE) HTTP STATUS CODES | 95 |
| ANNEX F (INFORMATIVE) REVISION HISTORY | 98 |
| BIBLIOGRAPHY | 100 |

LIST OF TABLES

| | |
|--|----|
| Table 1 – Conformance class URIs | 5 |
| Table 2 – Link Relations | 17 |
| Table 3 – Collection Resources | 29 |
| Table A.1 – Schema and Tests for Collections content | 57 |
| Table A.2 – Schema and Tests for Collection content | 59 |
| Table B.1 – Elements of “OGC API – Common::” () | 65 |
| Table B.2 – Elements of “OGC API – Common::OGC API – Common – Part 1” () | 65 |
| Table B.3 – Elements of “OGC API – Common::OGC API – Common – Part 2” () | 66 |

| | |
|--|----|
| Table B.4 – Elements of “OGC API – Common::OGC API – Records” () | 66 |
| Table B.5 – Elements of “OGC API – Common::Uniform Additional Dimensions” () | 67 |
| Table B.6 – Elements of “OGC API – Common::Address” () | 67 |
| Table B.7 – Elements of “OGC API – Common::BBox” (Array) | 68 |
| Table B.8 – Elements of “OGC API – Common::CollectionDescription” () | 68 |
| Table B.9 – Elements of “OGC API – Common::Collections” () | 70 |
| Table B.10 – Elements of “OGC API – Common::Concept” () | 71 |
| Table B.11 – Elements of “OGC API – Common::ConformanceClasses” () | 72 |
| Table B.12 – Elements of “OGC API – Common::Contact” () | 72 |
| Table B.13 – Elements of “OGC API – Common::Coordinates” (Array) | 73 |
| Table B.14 – Elements of “OGC API – Common::Email” () | 73 |
| Table B.15 – Elements of “OGC API – Common::Exception” () | 74 |
| Table B.16 – Elements of “OGC API – Common::Extent” () | 74 |
| Table B.17 – Elements of “OGC API – Common::Fields” (Array) | 75 |
| Table B.18 – Elements of “OGC API – Common::Format” () | 76 |
| Table B.19 – Elements of “OGC API – Common::Grid” (abstract) | 76 |
| Table B.20 – Elements of “OGC API – Common::Interval” (type) | 77 |
| Table B.21 – Elements of “OGC API – Common::IrregularGrid” () | 77 |
| Table B.22 – Elements of “OGC API – Common::LandingPage” () | 78 |
| Table B.23 – Elements of “OGC API – Common::Link” (type) | 79 |
| Table B.24 – Elements of “OGC API – Common::OtherDimension” () | 79 |
| Table B.25 – Elements of “OGC API – Common::Phone” () | 80 |
| Table B.26 – Elements of “OGC API – Common::RegularGrid” () | 81 |
| Table B.27 – Elements of “OGC API – Common::ResourceLanguage” () | 81 |
| Table B.28 – Elements of “OGC API – Common::TemporalExtent” () | 82 |
| Table B.29 – Elements of “OGC API – Common::SpatialExtent” () | 83 |
| Table B.30 – Elements of “OGC API – Common::Theme” () | 84 |
| Table B.31 – Definition table of “OGC API – Common::AccessConstraintsCode” (enumeration) | 84 |
| Table B.32 – Definition table of “OGC API – Common::AttributionMediaTypeCode” () | 85 |
| Table B.33 – Definition table of “OGC API – Common::LanguageDirectionCode” (enumeration) | 85 |
| Table B.34 – Definition table of “OGC API – Common::VariableType” () | 86 |
| Table E.1 – Typical HTTP status codes | 95 |

LIST OF FIGURES

| | |
|--|----|
| Figure 1 – UML class diagram describing the common resources | 26 |
|--|----|

LIST OF NORMATIVE STATEMENTS

| | |
|--|----|
| REQUIREMENTS CLASS 1: COLLECTIONS | 28 |
| REQUIREMENTS CLASS 2: UNIFORM MULTI-DIMENSION COLLECTION | 42 |
| REQUIREMENTS CLASS 3: HTML | 49 |
| REQUIREMENTS CLASS 4: JSON | 50 |
| REQUIREMENT 1 | 29 |
| REQUIREMENT 2 | 29 |
| REQUIREMENT 3 | 30 |
| REQUIREMENT 4 | 31 |
| REQUIREMENT 5 | 32 |
| REQUIREMENT 6 | 33 |
| REQUIREMENT 7 | 34 |
| REQUIREMENT 8 | 36 |
| REQUIREMENT 9 | 37 |
| REQUIREMENT 10 | 43 |
| REQUIREMENT 11 | 45 |
| REQUIREMENT 12 | 49 |
| REQUIREMENT 13 | 49 |
| REQUIREMENT 14 | 50 |
| REQUIREMENT 15 | 51 |
| RECOMMENDATION 1 | 28 |
| RECOMMENDATION 2 | 30 |
| RECOMMENDATION 3 | 34 |
| RECOMMENDATION 4 | 35 |
| RECOMMENDATION 5 | 37 |
| RECOMMENDATION 6 | 38 |
| RECOMMENDATION 7 | 49 |
| PERMISSION 1 | 38 |
| PERMISSION 2 | 38 |
| PERMISSION 3 | 46 |
| CONFORMANCE CLASS A.1 | 55 |
| CONFORMANCE CLASS A.2 | 60 |

| | |
|-----------------------------|----|
| CONFORMANCE CLASS A.3 | 62 |
| CONFORMANCE CLASS A.4 | 63 |

ABSTRACT

The OGC API – Common Standard is a multi-part standard which defines a set of documents whose requirements classes can be used to build resource and purpose-specific Web API specifications. This document, OGC API – Common – Part 2: Geospatial Data Standard (Common API-2: GeoData) is one of those parts. This part specifies how to list and describe available collections of geospatial data within a Web API deployment.

The OGC Standards baseline has been extended to include [Resource Oriented Architectures](#) and [Web APIs](#). In the course of developing OGC Web API standards, some practices proved to be common across multiple OGC Web API standards. These common practices are documented in the OGC API – Common Multi-Part Standard. OGC API – Common standards serve as reusable building-blocks. Standards developers can use these building-blocks in the construction of OGC Web API Standards. The result is a modular suite of coherent API standards which can be adapted by a system designer for the unique requirements of their system.

KEYWORDS

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, geographic information, spatial data, spatial things, dataset, distribution, API, json, html, OpenAPI, REST, Common

This document defines the *OGC API – Common – Part 2: Geospatial Data Standard*. Suggested additions, changes and comments on this standard are welcome and encouraged. Such suggestions may be submitted as an issue on the [OGC API – Common GitHub repository](#).

SECURITY CONSIDERATIONS

Clients should avoid blindly processing HTML markup code in the attribution property of collection descriptions specified by this Standard. In particular, care should be taken to avoid running any `<script>` code, including inline event handlers (e.g., `onclick`) and dangerous `href` values like `javascript:.` All untrusted input should be sanitized to prevent script execution and to mitigate XSS vulnerabilities.

See also the security considerations described in [OGC API – Common – Part 1: Core](#).

SUBMITTING ORGANIZATIONS

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- Heazeltech
- Ecere Corporation
- Universitat Autònoma de Barcelona (CREAF)
- UK Met Office
- CubeWerx Inc.

SUBMITTERS

All questions regarding this submission should be directed to the editors or the submitters:

| Name | Affiliation |
|-----------------------------------|---|
| Chuck Heazel (<i>editor</i>) | Heazeltech |
| Jerome St-Louis (<i>editor</i>) | Ecere Corporation |
| Joan Masó (<i>editor</i>) | Universitat Autònoma de Barcelona (CREAF) |
| Chris Little | UK Met Office |
| Carl Reed | Carl Reed & Associates |
| Panagiotis (Peter) A. Vretanos | CubeWerx Inc. |

ACKNOWLEDGEMENTS

A large portion of this document has been derived from OGC API – Features – Part 1: Core and generalized to any data access mechanism. Since the content was actually embedded within this document, OGC API – Features is not cited as a normative reference.

1

SCOPE

Spatial data is rarely considered as a single entity. Since Feature Collections, Coverages, Data Sets are all aggregations of Spatial or Temporal Resources, an OGC Web API would also expose its holdings as aggregates of spatial resources called *collections*.

A single API may provide access to a large number of collections. The purpose of the OGC API – Common – Part 2: Geospatial Data (Common API-2: GeoData) Standard is to specify Web resources for listing and describing available collections.

Common API-2: GeoData does not specify the nature of the geospatial data contained in a collection. Rather, this Standard specifies a basic capability which should be applicable to any geospatial resource type or access mechanisms. Additional OGC Web API Standards extend this foundation to define specific data access mechanisms.



2

CONFORMANCE

CONFORMANCE

Conformance with this Standard shall be checked using the tests specified in Annex A (normative) of this document.

The framework, concepts, and methodology for testing, and the criteria to claim conformance are specified in the OGC Compliance Testing Policies and Procedures and the [OGC Compliance Testing](#) web site.

The Standardization Target for this Standard is Web APIs.

OGC API – Common – Part 2: Geospatial Data defines API modules intended for re-use by other OGC Web API standards. For the purpose of conformance, the applicable API modules are identified by Conformance Classes.

Typically, the OGC API – Common – Part 2: Geospatial Data will only be implemented through reference to these Conformance Classes by other standards.

OGC API – Common – Part 2: Geospatial Data identifies four conformance classes. Each conformance class is defined by one requirements class.

The tests in Annex A are organized by Requirements Class. Therefore, an implementation of the *Collections* conformance class must pass all tests specified in Annex A for the *Collections* requirements class.

The requirements classes defined in Part 2: Geospatial Data are:

- Collections
- Uniform Multi-Dimension Collection
- HTML
- JSON

The Collections Requirements Class defines a common means to list and describe collections of spatial resources, but does not mandate a specific encoding or format for representing resources.

The Uniform Multi-Dimension Collection Requirements Class defines a consistent way to describe the domain of multidimensional collections of data, including additional dimensions beyond space and time, as well as regular and irregular grids.

The HTML and JSON requirements classes specify representations for these resources in commonly used encodings for spatial data on the web.

Common API-2: GeoData builds on API modules defined in the OGC API – Common – Part 1: Core (API-Core) Standard.

Each requirements class in the Common API-2: GeoData Standard identifies any API-Core Conformance Classes upon which it depends.

Proof of conformance with a Conformance Class includes demonstration of conformance with all dependencies of that Conformance Class.

The abstract tests in Annex A have been organized to facilitate validation of these dependencies.

These tests have been organized by requirements class.

A referencing standard only has to require conformance with a Conformance Class and all of the requirements and relevant tests are identified.

In addition, each conformance class includes one or more test.

This Standard specifies the requirements necessary to discover and describe collections of data, but does not specify how to access that data. Other OGC API Standards define data access mechanisms which can be combined with the requirements classes defined in this Standard.

2.1. Summary of conformance URIs

Table 1 – Conformance class URLs

| CORRESPONDING REQUIREMENTS CLASS | CONFORMANCE CLASS URI |
|------------------------------------|---|
| Collections | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/collections |
| Uniform Multi-Dimension Collection | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/umd-collection |
| HTML | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/html |
| JSON | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/json |



3

NORMATIVE REFERENCES

NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

R. Fielding, J. Reschke (eds.): IETF RFC 7231, *Hypertext Transfer Protocol (HTTP/1.1): Semantics and Content*. RFC Publisher (2014). <https://www.rfc-editor.org/info/rfc7231>.

T. Bray (ed.): IETF RFC 8259, *The JavaScript Object Notation (JSON) Data Interchange Format*. RFC Publisher (2017). <https://www.rfc-editor.org/info/rfc8259>.

M. Nottingham: IETF RFC 8288, *Web Linking*. RFC Publisher (2017). <https://www.rfc-editor.org/info/rfc8288>.

G. Klyne, C. Newman: IETF RFC 3339, *Date and Time on the Internet: Timestamps*. RFC Publisher (2002). <https://www.rfc-editor.org/info/rfc3339>.

Charles Heazel: OGC 19-072, *OGC API – Common – Part 1: Core*. Open Geospatial Consortium (2023). <http://www.opengis.net/doc/is/ogcapi-common-1/1.0.0>.

T. Berners-Lee, R. Fielding, L. Masinter: IETF RFC 3986, *Uniform Resource Identifier (URI): Generic Syntax*. RFC Publisher (2005). <https://www.rfc-editor.org/info/rfc3986>.

J. Gregorio, R. Fielding, M. Hadley, M. Nottingham, D. Orchard: IETF RFC 6570, *URI Template*. RFC Publisher (2012). <https://www.rfc-editor.org/info/rfc6570>.

OGC Abstract Specification Topic 2: Referencing by coordinates. <https://docs.ogc.org/as/18-005r4/18-005r4.html>

W3C: HTML5, W3C Recommendation, <https://www.w3.org/TR/html5/>

Schema.org: <https://schema.org/docs/schemas.html>

QUDT.org. QUDT Ontologies, derived models and vocabularies 2.1. Edited by R. Hodgson. 2024. Available at <https://www.qudt.org/>.

Regenstrief Institute, Inc. The Unified Code for Units of Measure. Edited by G. Schadow, .C J. McDonald. 2017. Available at <https://ucum.org/ucum>.

Open API Initiative: OpenAPI Specification, Version 3.0. The latest patch version at the time of publication of this standard was 3.0.3, available from <https://spec.openapis.org/oas/v3.0.3>.

JSON Schema: A Media Type for Describing JSON Documents. Edited by A. Wright, H. Andrews, B. Hutton, G. Dennis. 2022 [viewed 2023-10-14]. Available at <https://json-schema.org/draft/2020-12/json-schema-core>

JSON Schema Validation: A Vocabulary for Structural Validation of JSON. Edited by A. Wright, H. Andrews, B. Hutton. 2022 [viewed 2023-10-14]. Available at <https://json-schema.org/draft/2020-12/json-schema-validation>

4

TERMS, DEFINITIONS AND ABBREVIATED TERMS

TERMS, DEFINITIONS AND ABBREVIATED TERMS

This document uses the terms defined in [OGC Policy Directive 49](#), which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications ([OGC 08-131r3](#)), also known as the ‘ModSpec’. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

4.1. collection

(in the context of OGC APIs) A set of spatiotemporal data that may be available through one or more access mechanisms defined by OGC API standard(s)

4.2. coverage

function which returns values from its range for any direct position within its domain

(Source: OGC 07-011r2)

4.3. data access mechanism

(in the context of OGC APIs) mechanism defined by an OGC API Standard to access spatiotemporal data from a collection

Such mechanism is based on Web resources which are sub-resources of that collection. The access mechanism could be as simple as the definition of a single sub-resource URL template. The access mechanism may allow Web clients to access parts and/or the totality of the data available from the collection.

4.4. dataset

collection of data, published or curated by a single agent, and available for access or download in one or more representations (DCAT)

4.5. distribution

specific representation of a dataset

A dataset might be available in multiple serializations that may differ in various ways, including natural language, media-type or format, schematic organization, temporal and spatial resolution, level of detail or profiles (which might specify any or all of the above). (DCAT)

EXAMPLE: a downloadable file, an RSS feed or an API.

4.6. extent

area covered by something. Within this document, “extent” refers to spatial extent

The size or shape that may be expressed using coordinates. (W3C/OGC Spatial Data on the Web Best Practice)

4.7. feature

abstraction of real world phenomena

(Source: ISO 19101-1:2014)

Note 1 to entry: A feature may occur as a type or an instance. Feature type or feature instance shall be used when only one is meant.

4.8. feature collection

set of features from a dataset

(Source: ISO 19168-1:2020)

4.9. geometry

ordered set of n -dimensional points in a given coordinate reference system (W3C/OGC Spatial Data on the Web Best Practice)

4.10. OGC Web API

Web API that implements one or more Conformance Classes from an OGC API Standard

4.11. resource

entity that might be identified (Dublin Core Metadata Initiative – DCMI Metadata Terms)

Note 1 to entry: The term “resource”, when used in the context of an OGC Web API standard, should be understood to mean a Web Resource unless otherwise indicated.

4.12. resource type

definition of a type of resource

Resource types are re-usable components which are independent of where the resource resides in the API.

Note 1 to entry: Resource types are re-usable components that are independent of where the resource resides in the API.”

4.13. spatial resource

resource which represents or includes spatial data
A Spatial Thing.

4.14. spatial thing

anything with spatial extent, (i.e. size, shape, or position) and is a combination of the real-world phenomenon and its abstraction (W3C/OGC Spatial Data on the Web Best Practice)

4.15. temporal coordinate system

temporal reference system based on an interval scale on which distance is measured as a multiple of a single unit of time

(Source: ISO 19108:2002)

4.16. temporal position

location relative to a temporal reference system

(Source: ISO 19108:2002)

4.17. temporal reference system

reference system against which time is measured

(Source: ISO 19108:2002)

4.18. temporal resource

resource which represents or includes time and date
A Temporal Thing.

4.19. temporal thing

anything with temporal extent, i.e. duration

Examples are: The taking of a photograph, a scheduled meeting, or a GPS time-stamped track-point. ([W3C Basic Geo](#))

4.20. Web API

API using an architectural style that is founded on the technologies of the Web (W3C Data on the Web Best Practices)

4.21. web resource

resource that is identified by a URI

Note 1 to entry: For example, a web resource is any file or asset, such as text, images, HTML, XML, or JavaScript, that can be accessed over the web using a unique URL/URI

4.22. Abbreviated terms

| | |
|-------|--------------------------------------|
| API | Application Programming Interface |
| CORS | Cross-Origin Resource Sharing |
| CRS | Coordinate Reference System |
| HTTP | Hypertext Transfer Protocol |
| HTTPS | Hypertext Transfer Protocol Secure |
| IANA | Internet Assigned Numbers Authority |
| OGC | Open Geospatial Consortium |
| TRS | Temporal Coordinate Reference System |
| URI | Uniform Resource Identifier |

5

CONVENTIONS

This section provides details of conventions used in this document.

5.1. Identifiers

The normative provisions in this Standard are denoted by the URI <https://www.opengis.net/spec/ogcapi-common-2/1.0>.

All Requirements, Requirements Modules and Conformance Modules that appear in this document are denoted by partial URIs that are relative to this base.

Additional information about the use of Identifiers in API-Common is provided in the [OGC API – Common Users Guide](#).

5.2. Link relations

RFC 8288 (Web Linking) is used by this standard to express relationships between resources. [Link relation types](#) from the IANA Link Relations Registry are used wherever possible. Additional link relation types are registered with the OGC Naming Authority.

The link relationships used in Common API-2: GeoData are described in Table 2. Additional relation types may be used if the implementation warrants it.

Table 2 – Link Relations

| LINK RELATION | PURPOSE |
|---|---|
| alternate | Refers to a substitute for this context [IANA]. Refers to a representation of the current resource which is encoded using another media type (the media type is specified in the type link attribute). |
| https://www.opengis.net/spec/def/rel/ogc/1.0/data-meta | Identifies general metadata for the context (dataset or collection) that is primarily intended for consumption by machines. |
| collection | The target IRI points to a resource which represents the collection resource for the context IRI. [IANA] |
| https://www.opengis.net/ | Refers to a resource that identifies the specifications that the link's context conforms to. [OGC] |

| LINK RELATION | PURPOSE |
|---|---|
| <code>def/rel/ogc/1.0/conformance</code> | Indicates that the link's context is a distribution of a dataset that is an API and refers to the root resource of the dataset in an API. [OGC] |
| <code>https://www.opengis.net/def/rel/ogc/1.0/data</code> | Refers to a resource providing information about the link's context. [IANA] Links to external resources which further describe the subject resource |
| <code>http://www.opengis.net/def/rel/ogc/1.0/schema</code> | Refers to a resource that lists the properties of geospatial data in the collection represented by the link's context. (OGC API – Common – Part 3) [OGC] |
| <code>https://www.opengis.net/def/rel/ogc/1.0/items</code> | The target IRI points to a resource that is a member of the collection represented by the context IRI. [IANA] |
| <code>https://www.opengis.net/def/rel/ogc/1.0/items</code> | Refers to a resource that is comprised of members of the collection represented by the link's context. [OGC] |
| <code>license</code> | Refers to a license associated with this context. [IANA] |
| <code>cite-as</code> | Indicates that the link target is preferred over the link context for the purpose of permanent citation. [IANA] |
| <code>about</code> | Refers to a resource that is the subject of the link's context. [IANA] |
| <code>author</code> | Refers to the context's author. [IANA] |
| <code>disclosure</code> | Refers to a list of patent disclosures made with respect to material for which 'disclosure' relation is specified. [IANA] |
| <code>copyright</code> | Refers to a copyright statement that applies to the link's context. [IANA] |
| <code>sponsored</code> | Refers to a resource that is within a context that is sponsored (such as advertising or another compensation agreement). [IANA] |
| <code>terms-of-service</code> | Refers to the terms of service associated with the link's context. [IANA] |
| <code>self</code> | Conveys an identifier for the link's context. [IANA] A link to another representation of this resource. |
| <code>service-desc</code> | Identifies service description for the context that is primarily intended for consumption by machines. [IANA] API definitions are considered service descriptions. |
| <code>service-doc</code> | Identifies service documentation for the context that is primarily intended for human consumption. [IANA] |

| LINK RELATION | PURPOSE |
|---------------|--|
| service-meta | Identifies general metadata for the context that is primarily intended for consumption by machines. [IANA] |

Additional information on the use of link relationships is provided in the [OGC API – Common Users Guide](#).

5.3. Coordinate Reference Systems

As discussed in Chapter 9 of the W3C/OGC Spatial Data on the Web Best Practices document, the ability to express and share location in a consistent way is one of the most fundamental aspects of publishing geographic data. To do so, it is important to be clear about the coordinate reference system (CRS) within which the coordinates are expressed.

The Common API-2: GeoData Standard does not mandate the use of a specific coordinate reference system. However, if no CRS is specified, the default coordinate reference systems for spatial geometries are:

- [OGC:CRS84] – WGS 84 longitude and latitude without height
- [OGC:CRS84h] – WGS 84 longitude and latitude with ellipsoidal height

NOTE 1:[OGC:CRS84] is the CURIE form for the resolvable URI <https://www.opengis.net/def/crs/OGC/0/CRS84>, [OGC:CRS84h] is the CURIE form for the resolvable URI <https://www.opengis.net/def/crs/OGC/0/CRS84h>.

NOTE 2:The order of coordinates for the bounding boxes and spatial intervals used within the collection description will always follow the axis order of the applicable CRS exactly.

OGC Abstract Specification Topic 2 – Referencing by Coordinates (ISO 19111) provides the conceptual and logical model for Coordinate Reference Systems.

In this Standard, coordinates are primarily used for describing the spatial extent for which data is available within a collection.

5.4. Temporal instants and intervals

API – Common adopts the Gregorian calendar and a 24 hour time keeping system for describing temporal instants and intervals. All representations of these temporal elements which are discussed in this document conform to RFC 3339.

An ABNF representation of the RFC 3339 format is provided in Annex F.

Temporal instants and intervals are measured relative to an underlying temporal reference system (TRS). This Common API-2: GeoData Standard does not mandate a specific temporal

coordinate reference system. However, all dates or timestamps discussed in this document are in the Gregorian calendar and conform to RFC 3339. In data, other temporal reference systems may be used where appropriate.

5.5. API definition

5.5.1. General remarks

The OGC Common API – 2: GeoData specifies requirements and recommendations for the development of APIs allowing to list and describe spatial resources using a standard way of doing so. In general, deployed APIs will go beyond the requirements and recommendations stated in this Standard, in particular by implementing other OGC API Standards specifying data access mechanisms. A particular Web API implementation will support additional operations, parameters, and so on that are specific to that implementation.

So that developers can more easily learn how to use the deployed API, good documentation is essential. In the best case, documentation would be available both in HTML for human consumption and in a machine readable format that can be processed by software for compile-time or run-time binding. OpenAPI is one way to provide that machine readable documentation.

5.5.2. Role of OpenAPI

The OGC Common API – 2: GeoData uses OpenAPI 3.0 fragments in examples and to formally state requirements. Using OpenAPI 3.0 is not required for implementing an OGC API Standard. Other API definition languages may be used along with, or instead of, OpenAPI. However, any API definition language used should have an associated conformance class advertised through the /conformance path.

The OGC API – Common – Part 1 Standard includes a <<<http://www.opengis.net/spec/ogcapi-common-1/1.0/req/oas30>,conformance class>> for API definitions that follow the OpenAPI specification 3.0. Alternative API definition languages are also allowed. Conformance classes for additional API definition languages will be added as the OGC API landscape continues to evolve. An API definition is required for implementations conforming to the OGC API – Part 1: Core “Landing Page” requirements class.

5.5.3. References to JSON Schema components in normative statements

Some normative statements (requirements) use a phrase that a response to a request must validate against a JSON Schema component in the OGC schema repository.

In this case, implementations of this API are free to extend those components in the following ways:

- Supporting representations in other media types beyond JSON following the conceptual model described by the JSON Schema
- The range of values of a property may be extended (additional values) or constrained (only a subset of all possible values is allowed). An example for a constrained range of values is to explicitly specify the supported values of a string parameter or property using an *enum*.
- Additional properties may be added to the schema (unless explicitly disallowed by the JSON Schema).
- When providing an API definition, informative text, such as comments or description properties, may be changed or added.

5.5.4. Reusable OpenAPI components

Reusable components for OpenAPI definitions for an OGC API are referenced from this document. They are available from the OGC Schemas Registry at <https://schemas.opengis.net/ogcapi/common/part1/1.0> and <https://schemas.opengis.net/ogcapi/common/part2/1.0>.

Additional information on the use of OpenAPI as an API definition is provided in the [OGC API – Common Users Guide](#).

6

OVERVIEW

This OGC API – Common – Part 2: Geospatial Data Standard provides a way to list and describe available collections of spatiotemporal data. Web APIs specifying mechanisms to access data are defined in separate OGC API Standards. This Standard depends on the Core requirements class of OGC API – Common – Part 1: Core which specifies fundamental requirements for OGC Web APIs based on HTTP. Implementations may also conform to the Landing Page requirements class of Part 1 which specifies additional requirements for the landing page (root of the API), conformance declaration (/conformance) and an API definition.

6.1. Collections

Spatiotemporal data is rarely considered as a single entity, but as aggregations, or *collections*, of Spatio-Temporal things.

While *collection* is a common term, its specific meaning is often based on the context in which it is used. Given the focus on addressing geospatial data, a definition that reflects the unique characteristics of geospatial data collections is needed. Therefore, **for purposes of this standard** and in the context of OGC APIs, the term Collection refers to a set of spatiotemporal data that may be available through one or more access mechanisms defined by OGC API standard(s).

The purpose of the OGC API – Common – Part 2: Geospatial Data Standard is to list and describe the available geospatial data collections.

OGC Web API Standards could extend this definition to address the specific properties of the resources they describe.

6.2. Data access mechanisms

A collection of geospatial data may be accessed in more than one way. Some examples of data access mechanisms are:

- a feature-centric approach allowing to access individual features by their identifiers,
- providing access to a subset of geospatial information for an arbitrary area, time and resolution of interest,
- provide access to data for pre-determined partitions of space using tiles or discrete global grid zones.

To illustrate a particular use case, a collection of data for land cover classification may be available either as individual features where one multi-polygon feature corresponds to low vegetation,

another feature corresponds to trees and yet another feature corresponds to the built-up area. In an implementation of the OGC API – Features Standard, each of these features may be individually accessible at:

`/collections/landcover/items/{itemId}.`

The API deployment may also include an implementation of the access mechanism defined by the OGC API – Coverages Standard for the same classified land cover collection enabling retrieval of a subset for a given spatial area using:

`/collections/landcover/coverage?subset=Lat(10:20),Lon(30:40).`

The OGC API – Common – Part 2: Geospatial Data Standard describes data collections, but does not define any *access mechanisms* to the data. Access mechanisms are defined in separate OGC Web API Standards.

The *access mechanisms* are defined by the resource paths which are specified in the different OGC API Standards. The resources associated with a particular *access mechanism* for a specific collection will be under the collection resource:

`/collections/{collectionId}/{accessResources}`

where:

- `{collectionId}` is an identifier for the collection
- `{accessResources}` are resources defined for accessing data using a particular mechanism.

IMPORTANT

Editors of OGC API Standards and implementers of Web APIs will carefully avoid redefining different resources with the same path in different OGC API Standards and implementations, so that API deployments can offer multiple data access mechanisms for the same collections.

The available data access mechanisms supported for a specific collection are typically advertised by including links using specific link relation types defined by the various OGC API Standards in the `links` array of the collection description.

Access mechanisms should not be confused with *representations*.

6.3. Representation

Data access mechanisms may support one or more representation (data formats / encodings) for each resource they define. A representation is typically negotiated between the server and client

using HTTP content negotiation (the `Accept`: request header). In the land cover example above, the client could request either individual features or a feature collection as GeoJSON (`Accept: application/geo+json`) or as GeoPackage (`Accept: application/geopackage+sqlite3`), and the coverage request could be requested as GeoTIFF (`Accept: image/tiff; application=geotiff`) or also as GeoPackage (`application/geopackage+sqlite3`) leveraging the [GeoPackage Extension for Tiled Gridded Coverage Data](#). Alternative formats supported by both the server and client could also be negotiated successfully.

Some media types for encodings such as JSON are very generic. When no suitable media type has been registered for a representation using a specific schema, a mechanism to negotiate a particular profile may also be used for example using a profile query parameter or an `Accept-Profile`: request header as described in the [W3C Content Negotiation by Profile Working Draft](#), in combination with the regular HTTP content negotiation headers. The concept of profile may also be used to control other aspects of the representation besides the schema.

6.4. UML Class Diagram

The following UML class diagram represents the model of common resources offered by Web APIs implementing one or more OGC API Standards. In particular, the diagram describes the resources presented in OGC API Common – Part 1: the Landing page (`LandingPage` class), the conformance page (`ConformanceClasses`) and the exception report (`Exception`). The diagram also describes the two resources specified in this Part 2: the collections page (`Collections`) and the collection description (`CollectionDescription`), as well as its associated classes. While these common resources are precisely described in the requirements to follow, they are presented here as a UML diagram for convenience. The transformation of this UML diagram into a list of tables, one for each class, can be found in Annex B. In case of discrepancy between this UML diagram, the UML tables, and the text of the requirements, the requirements should be considered correct.

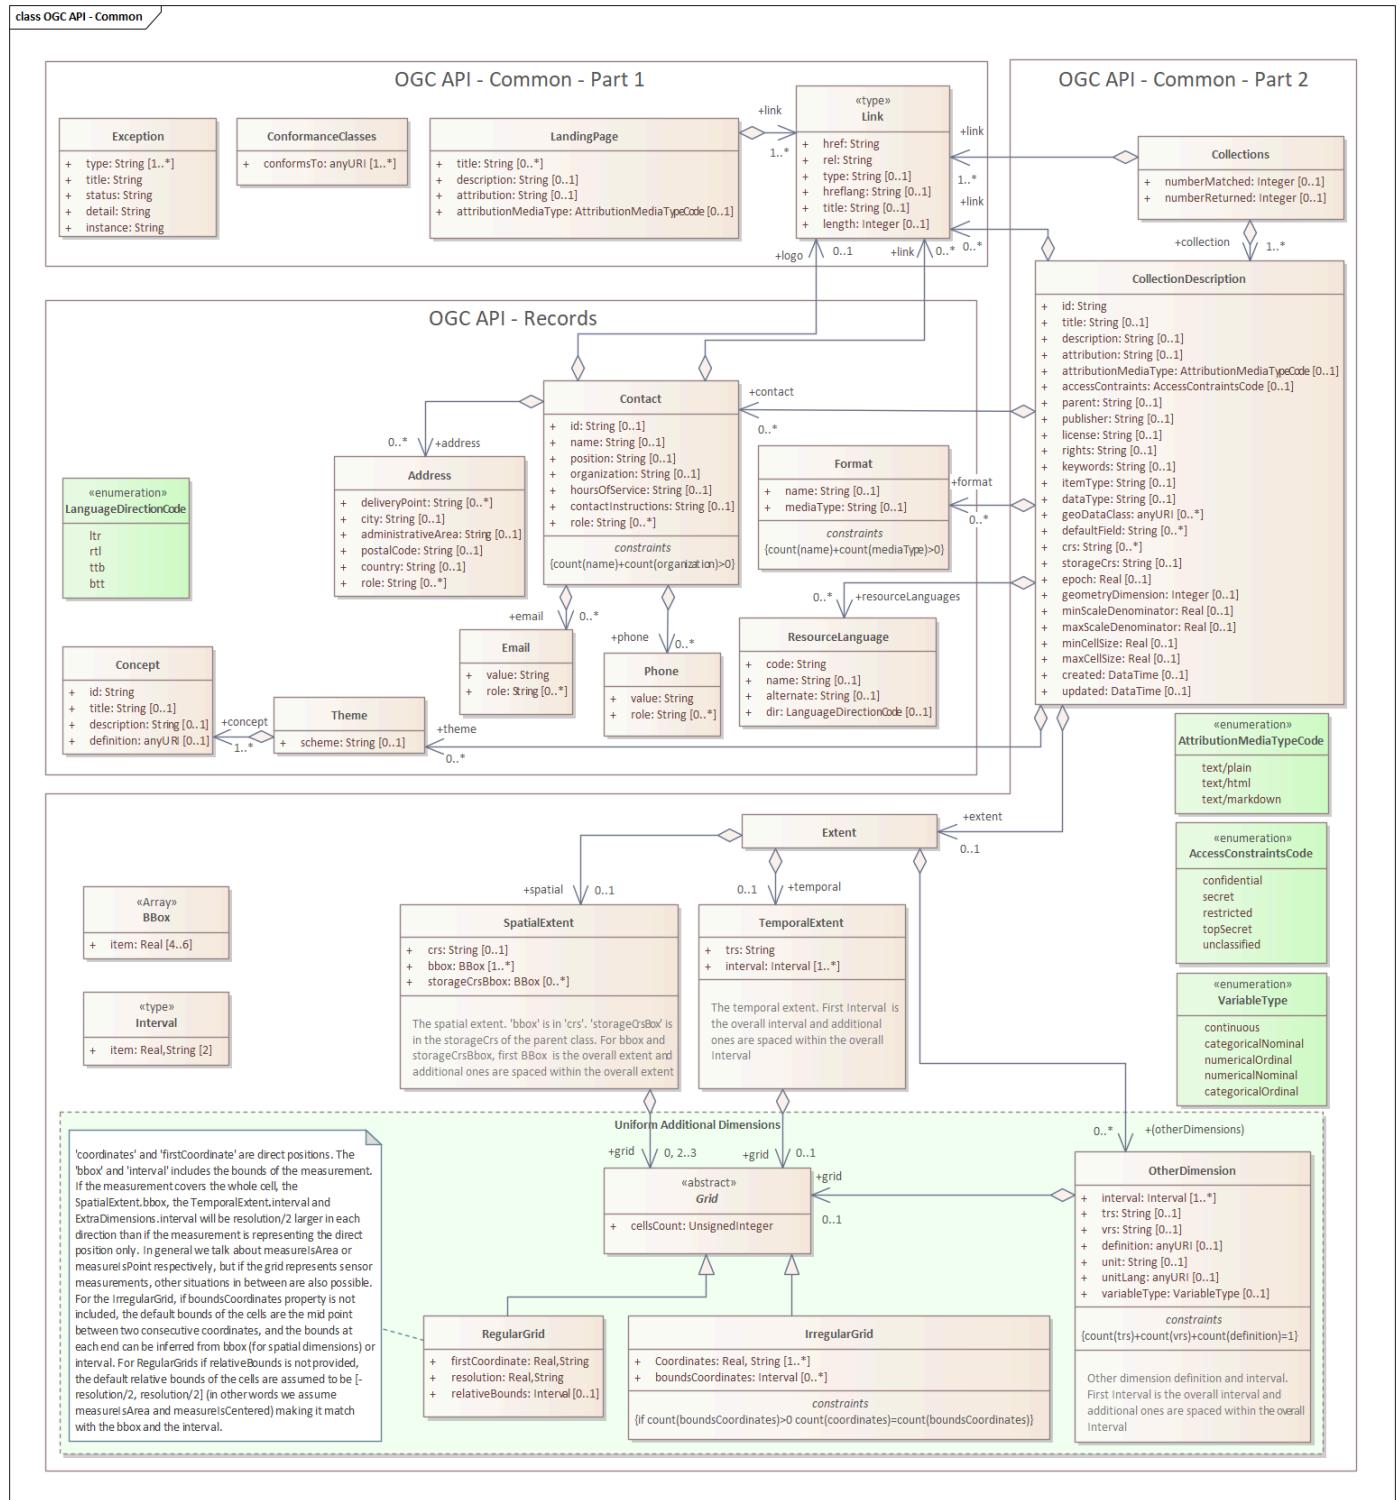


Figure 1 – UML class diagram describing the common resources

7

REQUIREMENTS CLASS “COLLECTIONS”

REQUIREMENTS CLASS “COLLECTIONS”

REQUIREMENTS CLASS 1: COLLECTIONS

| | |
|----------------------|---|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections |
| TARGET TYPE | Web API |
| CONFORMANCE CLASS | Conformance class A.1: https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/collections |
| PREREQUISITE | https://www.opengis.net/spec/ogcapi-common-1/1.0/req/core |
| NORMATIVE STATEMENTS | Requirement 1: /req/collections/collections-list-op Requirement 2: /req/collections/collections-list-success Requirement 3: /req/collections/collections-list-links Requirement 4: /req/collections/collections-list-collections Requirement 5: /req/collections/description-op Requirement 6: /req/collections/description-success Requirement 7: /req/collections/description-links Requirement 8: /req/collections/description-extent Requirement 9: /req/collections/description-extent-multi |

The Collections Requirements Class consistently describes across the OGC API Standards suite the resources and operations used to list and describe geospatial collection resources exposed through a deployed Web API. This class neither specifies how to organize your data into collections nor how to provide access to the data described in the collections. That level of detail is reserved for OGC Web API Standards that define access mechanisms through specific resources (see Access mechanisms Section).

RECOMMENDATION 1

| | |
|------------|--|
| IDENTIFIER | /rec/collections/rec-part1-landing-page |
| A | An implementation of the /Collections Requirements Class SHOULD also implement the Landing Page conformance class which covers a landing page, a conformance page and an API definition as defined in OGC API – Common Part 1: Core. |

The two resources defined by this Requirements Class are summarized in Table 3 and their operations are defined in the following requirements.

Table 3 – Collection Resources

| RESOURCE | URI | HTTP METHOD | DESCRIPTION |
|------------------------|-----------------------------|-------------|---|
| List of Collections | /collections | GET | List of available Collections including some descriptions of each one |
| Collection description | /collections/{collectionId} | GET | Description about a specific collection of geospatial data with links to distribution |

7.1. List of Collections Resource (/collections)

Implementations of OGC API Standards typically enable deployers to organize their geospatial data into collections. Information about those collections is accessed through the /collections path and the <https://www.opengis.net/def/rel/ogc/1.0/data> link relation.

7.1.1. Operation

REQUIREMENT 1

IDENTIFIER /req/collections/collections-list-op

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

A The API SHALL support the HTTP GET operation at the path /collections.

B If the deployed API instance has a landing page (or an equivalent mechanism to expose root resources), this landing page or equivalent SHALL link to this resource listing collections (/collections) using the link relation type <https://www.opengis.net/def/rel/ogc/1.0/data>.

7.1.2. Response

REQUIREMENT 2

IDENTIFIER /req/collections/collections-list-success

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

A A successful execution of the operation SHALL be responded with an HTTP status code 200.

REQUIREMENT 2

- B** The content of the response SHALL validate against the JSON schema [collections.yaml](#).

The collections response returned by this operation is based on the [collections.yaml](#) JSON schema. An example of a response listing collections are provided in Clause 7.1.2.1.

This Collections schema is further constrained by the following requirements and recommendations.

To support hypermedia navigation, the `links` property must be populated with sufficient hyperlinks to navigate through the whole dataset.

REQUIREMENT 3

IDENTIFIER [/req/collections/collections-list-links](#)

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

- A** A 200-response SHALL include the following links in the `links` property of the response:
- A link to this response document (relation: `self`),
 - A link to the response document in every other media type supported by the API (relation: `alternate`).

- B** All links SHALL include the `rel` property.

- C** All links where `rel` is `self` or `alternate` SHALL include the type link parameter.

Additional information may be available to assist in understanding and using this dataset. Links to those resources should be provided as well.

RECOMMENDATION 2

IDENTIFIER [/rec/collections/collections-list-describedby](#)

- A** If external descriptions exist that provide additional information about the structure or semantics for the resource, a 200-response SHOULD include links to each of those resources in the `links` property of the response (relation: `describedby`).
- B** The type link parameter SHOULD be provided for each link. This applies to resources that describe the whole dataset.

The `collections` property of the Collections response provides a description of each individual collection distributed by the Web API deployment.

REQUIREMENT 4

IDENTIFIER /req/collections/collections-list-collections

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

A For each spatial resource collection accessible through an implementation of this API, metadata describing that collection SHALL be provided in the `collections` property of the list of Collections response.

The array items included in the `collection` property are described in the Collection Resource section of the Collections Requirements Class.

The Collections Requirements Class does not define any parameters for use against a collections resource.

Implementers who plan supporting the offering of large numbers of collections from the same API endpoint may consider extending their API implementations with capabilities defined in the OGC API – Records Standard (with collections acting as the local resources of a local resource catalog), as well as candidate extensions to the OGC API – Common Standard that introduce capabilities for hierarchical collections, searching, filtering, and sorting collections.

7.1.2.1. Collections Response Example

The following JSON example response lists available collections for a dataset with a single “buildings” feature collection.

There is a link to the resource listing collections itself (link relation type: `self`).

Representations of this resource in other formats are referenced (link relation type: `alternate`).

An additional link is to the logical schema of the collection (link relation type: `[ogc-rel:schema]`).

The reference systems for describing the spatiotemporal extent do not need to be specified, as they default to [OGC:CRS84] and Gregorian calendar / Coordinated Universal Time (UTC). This spatiotemporal extent always needs to be specified (or default) this way for data referenced to Earth and a time scale for which the Gregorian calendar is suitable. For the spatial extent, the `crs` specified in the `spatial` property of the extent only describes the CRS of the `bbox` and is independent of the native / storage reference system of the data itself, which can be specified separately in the `storageCrs` property. For explicitly specifying the Gregorian calendar, the URI <https://www.opengis.net/def/crs/OGC/0/GregorianDateTime> can be used, or alternatively <https://www.opengis.net/def/uom/ISO-8601/0/Gregorian> for compatibility with OGC API – Features.

```
{  
  "links": [  
    { "href": "https://data.example.org/collections.json",  
      "rel": "self", "type": "application/json", "title": "This document" },  
    { "href": "https://data.example.org/collections.html",  
      "rel": "alternate", "type": "text/html", "title": "HTML representation" }  
  ]  
}
```

```

        "rel": "alternate", "type": "text/html", "title": "This document as HTML" }
    ],
    "collections": [
        {
            "id": "buildings",
            "title": "Buildings",
            "description": "Buildings in the city of Bonn.",
            "attribution": "Copyright © 2025 _City of Bonn_ ![logo](https://example.org/cityOfBonn.png)",
            "attributionMediaType": "text/markdown",
            "extent": {
                "spatial": { "bbox": [ [ 7.01, 50.63, 7.22, 50.78 ] ] },
                "temporal": { "interval": [ [ "2010-02-15T12:34:56Z", "2018-03-18T12:11:00Z" ] ] }
            },
            "links": [
                { "href": "https://data.example.org/collections/buildings",
                  "rel": "self", "type": "application/json" },
                { "href": "https://data.example.org/collections/buildings/schema",
                  "rel": "[ogc-rel:schema]", "type": "application/schema+json",
                  "title": "Logical schema for buildings" }
            ]
        }
    ]
}

```

Listing 1 – Example /collections response listing collections

7.1.3. Error situations

See Annex E for general guidance.

7.2. Collection Description Resource (/collections/{collectionId})

Each resource collection is described by a set of metadata. That metadata can be accessed directly using the /collections/{collectionId} path and as an entry in the collections property of the /collections resource.

7.2.1. Operation

REQUIREMENT 5

IDENTIFIER /req/collections/description-op

INCLUDED Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req>
IN collections

REQUIREMENT 5

- A The Implementation SHALL support the HTTP GET operation at the path /collections/{collectionId}, where the parameter collectionId can be any values of the id property in the response to the list of collections (JSONPath: \$.collections[*].id in /collections).

7.2.2. Response

REQUIREMENT 6

IDENTIFIER /req/collections/description-success

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

- A A successful execution of the operation SHALL be reported as a response with a HTTP status code 200.
- B The content of a *Collection* description resource SHALL be based upon the JSON schema [collectionDesc.yaml](#).
- C The content of the *Collection* description resource response SHALL be consistent with the content for this collection in the /collections response, with the exception of links which can contain additional links in the response for the individual *Collection* description resource. That is, if a property is included in the response to the list of collections at /collections, the value for that property of the same collection (the collection whose id value corresponds to the {collectionId}) SHALL be identical for response for the *Collection* description resource (/collections/{collectionId}).

The collection description response returned by this operation is based on the [collectionDesc.yaml](#) JSON schema.

An example of a response describing a collection are provided in Clause 7.2.2.5.

Most of the properties of the Collection resource are self-explanatory. However, a few properties require additional explanation.

7.2.2.1. Attribution

A collection description can include an attribution property allowing clients to display a short attribution for data being visualized. For example, this is often shown at the bottom of a map in a 2D interface. This attribution, providing a way to identify the source of the geographic information, can contain markup text whose format may be indicated in the attributionMediaType property. That format can be either plain text (text/plain), HTML (text/html) or [CommonMark](#) (text/markdown). If the 'attributionMediaType' indicates something other than text/plain, the attribution element string should be interpreted by a markup parser selected based on that media type to be presented to the user (e.g., text/markdown will be parsed by a library supporting CommonMark). By allowing markup, the

attribution string can import images (e.g., organization logos) and format the text (e.g., the name of the organization in italics). See the example collection response for an example of the use of markup in the attribution element.

Note that in order to support attribution in different languages, a server may take into consideration the `Accept-Language`: request header, for example a client would make a request specifying `Accept-Language: fr, en; q=0.8` to prioritize a French representation, but fall back to English if a French representation is not available. This language negotiation mechanism is part of the HTTP standard and affects all resources, and the language of all properties inside these. For example, in a collection description, this language negotiation will apply to titles, descriptions, keywords, links, etc. (not only the attribution).

The following IANA link relations can also be considered to link (using the `links` property — see Clause 7.2.2.3) to resources providing additional information regarding the origin, ownership, funding and restrictions associated with the data: `about`, `author`, `copyright`, `cite-as`, `sponsored`, `disclosure`, `license`, `terms-of-service`.

7.2.2.2. Item Type

In some collections of geospatial data, the members (`items`) that make up that collection can be individually accessed by a client. In this case, the `itemType` property in the Collection resource identifies the type of the `items` accessible from that collection.

RECOMMENDATION 3

IDENTIFIER `/rec/collections/description-item-type`

A If the members (`items`) that make up a collection can be individually accessed by a client, then the `itemType` key **SHOULD** be included in the Collection resource to indicate the type of the items (e.g. feature or record).

7.2.2.3. Links

To support hypermedia navigation, the `links` property must be populated with sufficient hyperlinks to navigate through the whole dataset.

REQUIREMENT 7

IDENTIFIER `/req/collections/description-links`

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

A A 200-response **SHALL** include the following links in the `links` property of the response:

- A link to this response document (relation: `self`),

REQUIREMENT 7

- A link to the response document in every other media type supported by the API (relation: alternate).

B All links SHALL include the `rel` property.

C All links where `rel` is `self` or `alternate` SHALL include the `type` link parameter.

Additional information may be available to assist in understanding and using this dataset. Links to those resources should be provided as well.

RECOMMENDATION 4

IDENTIFIER `/rec/collections/collection-describedby`

- A** If external schemas or descriptions exist that provide additional information about the structure or semantics of the collection, a `200`-response SHOULD include links to each of those resources in the `links` property of the response (relation: `describedby`).
- B** The `type` link parameter SHOULD be provided for each link.

The <http://www.opengis.net/def/rel/ogc/1.0/schema> link relation should be used to reference a logical schema (see OGC API – Common – Part 3: Schemas).

7.2.2.4. Extent

The `extent` property defines a spatiotemporal envelope that encompasses the geospatial data in the collection. Since not all collections are nicely clustered around a single place in space and time, the `extent` property provides flexibility in how that surface can be defined.

- The `Spatial` bounding boxes (`bbox`, and optionally `storageCrsBbox`) provide a set of rectangular bounding boxes which use coordinates to envelope portions of the collection. Typically only the first element would be populated. Additional boxes may be useful, for example, when the collection is clustered in multiple, widely separated locations.
- `Temporal Interval` provides a set of temporal periods. Typically only the first temporal period would be populated. However, like `bbox`, additional periods can be added if the collection does not form a single temporal cluster.

The temporal reference system (`trs`) specified in the `temporal` property of the `extent` defines not only the reference system of the `interval`, but also the reference system for the primary temporal dimension of the data.

For the spatial extent, the `crs` specified in the `spatial` property of the `extent` defines only the coordinate reference system of the `bbox`. For data referenced to Earth, this `crs` will always be [OGC:CRS84] or [OGC:CRS84h]. The native CRS of the data is specified separately in the

storageCrs property of the collection description. For some access mechanisms, this native CRS corresponds to the default output CRS. These access mechanisms may additionally support other output CRSs which are specified in the crs property of the collection description.

For the storageCrs as well as for the crs list of supported output CRSs, implementors of Web APIs based on OGC API standards are strongly recommended to reference existing CRS definitions in the form of URIs (or the equivalent CURIEs) such as the ones provided by the [EPSG Geodetic Parameter Dataset](#). However, there are situations where the required CRS has not been registered with an authority.

For these cases, where a URI does not exist, a [Well-Known Text](#) string describing the coordinate reference system, or a JSON object encoding of the CRS (using the [PROJJSON](#) schema or a potential “CRS JSON” successor if eventually standardized by the OGC) can be specified.

Such alternate CRS definitions can also be used for the crs of the bbox for data in an engineering CRS or otherwise not georeferenced to Earth.

In the following example, the native CRS of the data is in the Mercator CRS (EPSG:3395). The data is referenced to Earth, therefore the bounding box for discovery purpose needs to be specified in OGC:CRS84. The CRSs available for output (which the client could potentially select using a crs query parameter defined by the access mechanism) include both EPSG:3395 and OGC:CRS84.

```
"extent":  
{  
  "spatial": {  
    "crs": "[OGC:CRS84]",  
    "bbox": [ -180, -85.0840590500295, 180, 85.0840590500295 ],  
    "storageCrsBbox": [ -20037508.342789, -20037508.342684, 20037508.342789,  
    20037508.342684 ]  
  }  
},  
"storageCrs": "[EPSG:3395]",  
"crs": [ "[EPSG:3395]", "[OGC:CRS84]" ]
```

Listing 2 – Example illustrating the CRS-related properties of the collection description

WARNING

While some OGC API Standards explicitly support the use of CURIEs for properties of the collection description such as storageCrs and the crs array of supported output CRSs, other OGC API Standards do not. For servers implementing those OGC API Standards that do not allow the use of CURIEs, full URIs therefore need to be used.

REQUIREMENT 8

IDENTIFIER /req/collections/description-extent

INCLUDED Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/>
IN collections

REQUIREMENT 8

- A When an extent property is provided for a collection, that extent's boundaries SHALL encompass the spatial and temporal extent of the data in the collection. The temporal extent may use null values to indicate a half-bounded or unbounded time interval.
If the data contains spatial or temporal information defined in multiple properties, the Implementation needs to determine how this extent is derived from those properties.
- B For a collection whose native CRS (`storageCrs`) differs from the `crs` specified in the spatial property (which is always [OGC:CRS84] for data referenced to Earth), the bounds of the spatial dimensions in that native CRS SHALL be described in the `storageCrsBbox` of the spatial property (unlike the other dimensions which use the `interval` property).
- C The bounds of the spatial dimension in the CRS defined in the `crs` property of the spatial property (which defaults to [OGC:CRS84] if not present) SHALL be described in the `bbox` of the spatial property in that CRS (always [OGC:CRS84] for data referenced to Earth).

REQUIREMENT 9

IDENTIFIER /req/collections/description-extent-multi

INCLUDED IN Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

- A If the extent property includes a member `spatial`, all data in the collection SHALL be inside the extent described by the first bounding box in the `bbox` array.
- B If the extent property includes a member `spatial` and the `bbox` array has more than one item, individual components (e.g., a feature or scene) of the collection SHALL be inside the extent described by one of the other bounding boxes in the `bbox` array.
- C If the extent property includes a member `temporal`, all data in the collection SHALL be inside the extent described by the first time interval in the `interval` array.
- D If the extent property includes a member `temporal` and the `interval` array has more than one item, individual components of the collection SHALL be inside the extent described by one of the other time intervals in the `interval` array.

NOTE: As a consequence, the first bounding box is a union of all subsequent bounding boxes, and the first temporal interval is a union of all subsequent temporal intervals.

RECOMMENDATION 5

IDENTIFIER /rec/collections/description-extent-single

- A While the spatial and temporal extents support multiple bounding boxes (`bbox` array) and time intervals (`interval` array) for more accurately describing sparse datasets, implementations SHOULD provide only a single bounding box or time interval for datasets with a relatively homogeneous spatiotemporal distribution.

PERMISSION 1

IDENTIFIER /per/collections/description-extent-extensions

- A This requirements class only specifies requirements for spatial and temporal extents. However, the extent object MAY be extended with additional members to represent other extents, such as thermal or pressure ranges. See the Uniform additional dimension conformance class for a well-defined way of describing additional dimensions.

RECOMMENDATION 6

IDENTIFIER /rec/collections/description-extent-storage-crs-bbox

- A If the native CRS of the data, as specified in the storageCrs property, is not [OGC:CRS84] or [OGC:CRS84h], the spatial extent of the data in that native CRS SHOULD be specified in the storageCrsBbox of the spatial property.

PERMISSION 2

IDENTIFIER /per/collections/description-reference-systems

- A For data not referenced to the Earth (e.g., the Moon, Mars), the spatial extent's bbox property MAY be specified in a CRS other than [OGC:CRS84] or [OGC:CRS84h], with this CRS indicated in the crs property of the spatial property.
- B For data for which the Gregorian calendar is not suitable, such as geological time scale, another temporal reference system MAY be specified in the trs property of the temporal property.

7.2.2.5. Collection Object Examples

This Collection Description example response in JSON is for a single “buildings” collection.

The basic descriptive information includes:

- “id”: an identifier for this collection
- “title”: human-readable title for this collection
- “description”: longer text describing this collection
- “attribution”: markup providing attribution (owner, producer, logo, etc.) of this collection

The response includes links to:

- the response itself (link relation type: `self`),
- representations of this response in other formats are referenced using (link relation type: `alternate`),
- an additional link is to a logical schema for the collection (link relation type: `[ogc-rel:schema]`).

Finally, this response includes both spatial and temporal extents.

The reference systems for describing the spatiotemporal extent do not need to be specified, as they default to [OGC:CRS84] (longitude, latitude) and Gregorian calendar / Coordinated Universal Time (UTC) and should always be specified (or default) this way for data referenced to Earth and a time scale for which the Gregorian calendar is suitable. For the spatial extent, the `crs` specified in the `spatial` property of the extent only describes the CRS of the `bbox` and is independent of the native / storage reference system of the data itself, which can be specified separately in the `storageCrs` property. For explicitly specifying the Gregorian calendar, the URI <https://www.opengis.net/def/crs/OGC/0/GregorianDateTime> can be used, or alternatively <https://www.opengis.net/def/uom/ISO-8601/0/Gregorian> for compatibility with OGC API – Features.

```
{
  "id": "buildings",
  "title": "Buildings",
  "description": "Buildings in the city of Bonn.",
  "attribution": "Copyright © 2025 _City of Bonn_ ![logo](https://example.org/cityOfBonn.png)",
  "attributionMediaType": "text/markdown",
  "extent": {
    "spatial": { "bbox": [ [ 7.01, 50.63, 7.22, 50.78 ] ] },
    "temporal": { "interval": [ [ "2010-02-15T12:34:56Z", "2018-03-18T12:11:00Z" ] ] }
  },
  "links": [
    { "href": "https://data.example.org/collections/buildings",
      "rel": "self", "type": "application/json" },
    { "href": "https://data.example.org/collections/buildings/schema",
      "rel": "[ogc-rel:schema]", "type": "application/schema+json",
      "title": "Logical schema for buildings" }
  ]
}
```

Listing 3 – Example `/collections/{collectionId}` response describing a collections

7.2.3. Error Situations

See Annex E for general guidance.

If the parameter `collectionId` does not exist on the server, the status code of the response will be 404 (see Table E.1).

7.3. OGC API – Records compliance

When implementing the “Collections” requirement class, the `/collections` end-point can be considered a *Local Resource Catalog*, where the local resources are the collections being cataloged.

This requirement class is consistent with the requirements of [OGC API – Records – Part 1: Core “Local Resources Catalog” \(Deployment\)](#). An implementation may gain additional interoperability by conforming to that requirement class from OGC API – Records as well. In this case, the implementation should verify and declare conformance with these five conformance classes defined in Records corresponding to the following URIs:

Table 4

| OGC API – RECORDS | |
|---|---|
| REQUIREMENTS | URI |
| CLASS | |
| Record Core | https://www.opengis.net/spec/ogcapi-records-1/1.0/conf/record-core |
| Record Collection | https://www.opengis.net/spec/ogcapi-records-1/1.0/conf/record-collection |
| Crawlable Catalog | https://www.opengis.net/spec/ogcapi-records-1/1.0/conf/crawlable-catalog |
| Local Resources Catalog | https://www.opengis.net/spec/ogcapi-records-1/1.0/conf/local-resources-catalog |
| Autodiscovery | https://www.opengis.net/spec/ogcapi-records-1/1.0/conf/autodiscovery |

The additional requirements include linking to the `/collections` end-point with an <https://www.opengis.net/def/rel/ogc/1.0/ogc-catalog> link relation from the landing page.



8

REQUIREMENTS CLASS “UNIFORM MULTI-DIMENSION COLLECTION”

REQUIREMENTS CLASS “UNIFORM MULTI-DIMENSION COLLECTION”

REQUIREMENTS CLASS 2: UNIFORM MULTI-DIMENSION COLLECTION

| | |
|----------------------|--|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/req/umd-collection |
| TARGET TYPE | Web API |
| CONFORMANCE CLASS | Conformance class A.2: https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/umd-collection |
| PREREQUISITE | Requirements class 1: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections |
| NORMATIVE STATEMENTS | Requirement 10: /req/umd-collection/extent-uad-definition Requirement 11: /req/umd-collection/grid-description |

The Collections Requirements Class defines a Collection resource which supports both geospatial and temporal dimensions. However, the domain of some datasets cannot be fully described with only spatiotemporal dimensions. The Uniform Multi-Dimension Collection Requirements Class extends the Collection resource to support an unlimited number of dimensions defined in a uniform manner, so that clients supporting this requirements class can interpret these dimensions in a generic manner.

8.1. Uniform description of all dimensions

A Uniform Multi-Dimension Collection is an extension of the Collection resource.

This requirements class supports the definition of additional dimensions beyond spatial and temporal in a specific way which is consistent with the spatial and temporal dimensions.

Each dimension is identified by using a semantic definition property. An interval providing the lower and upper bound for the coordinates along that dimension also needs to be included, as well as a unit of measure where applicable.

As an alternative – or in addition to – the definition, a temporal reference system (trs) or a vertical reference system (vrs) can be specified. The trs or vrs property can be populated with either a URI or CURIE.

NOTE: If a 3D CRS exists including the vertical dimension, that CRS should be used inside the “spatial” object of the extent, instead of defining a separate vertical dimension using vrs. For

vertical CRSs corresponding to the concept of a variable, such as a pressure level, the semantic definition for that variable should be used instead of `vrs`.

For additional dimensions beyond spatial and temporal, the reference system is defined as a combination of the definition and unit, or alternatively the `trs` or `vrs`. In addition to specifying the reference system of the interval, this also specifies the reference system of that dimension for the data itself. Unlike the spatial CRS, the collection description in this standard only supports defining a single reference system for the temporal dimension and each additional dimension.

To validate against this UMD Requirements Class, the `- type: object` line within the `anyOf : in the extent.yaml` YAML JSON Schema of the collection description's extent should be commented out.

REQUIREMENT 10

IDENTIFIER /req/umd-collection/extent-uad-definition

INCLUDED IN Requirements class 2: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/umd-collection>

- A** Any additional dimension property added to the extent of a collection description SHALL contain an `interval` property consisting of an array of one or more interval(s), where the first element describes the overall interval where data is available for the collection, whereas any additional elements describe intervals encompassing clusters of data availability within the overall interval.
- B** Each interval element SHALL be described as an array of two values, with the first being the lower bound and the second the upper bound.
- C** An unbounded or half-bounded interval SHALL be described using a null value for its lower and/or upper bound.
- D** Any additional dimension SHALL specify a URI as either the value of a `definition` to indicate the semantic concept for the variable (from any semantic definition vocabulary, such as [QUDT](#)) associated with the dimension, the value of a `trs` property indicating a temporal reference system or the value of a `vrs` property indicating the vertical reference system.
- E** For additional dimension defined using `definition`, where a particular unit is used, that dimension SHALL contain a `unit` property expressing the unit of measure, where the language for defining the unit is [UCUM](#) (Unified Code for Units of Measure), unless specified otherwise in a `unitLang` property (using values such as "UCUM" or "QUDT").

8.2. Describing gridded dimensions

For gridded data, whether using a regular or an irregular grid, this requirements class defines a `grid` property which is used to describe such grids.

While the interval specified for the dimension (or bbox for spatial dimensions) describes the region occupied by all cells, including the region of validity or bounds of all measurements, this grid property describes in more detail each individual measurement.


Common types of grids are often called *Value-is-Area* or *Value-is-Point*, but especially in the case of sensor measurements, other situations in-between are also possible.

8.2.1. Regular grids

A regular grid has data measurements separated by a constant distance (the resolution of the grid), while for an irregular grid the distance between data measurements varies. For both cases, the number of cells (cellsCount) is specified. A cell is a region within which a particular measurement is valid.


The bounds are specified as relativeBounds which are relative to points starting from a firstCoordinate separated by an equal distance of resolution units. The lower value for the interval for a particular dimension (or bbox in the case of spatial dimensions) corresponds to the firstCoordinate plus the first value of the relativeBounds, while the upper value corresponds to the firstCoordinate plus cellsCount times the resolution plus the second value of the relativeBounds.

For example, a regular grid where each measure is associated with infinitely small points would have relativeBounds of $[0, 0]$. With a cellsCount of 3, a resolution of 0.5, and a firstCoordinate at 0, the corresponding interval would be $[0, 1]$.



Listing 4 – Diagram illustrating a *Value-is-Point* regular grid

When each measure is associated with an area filling entire cells, there could be multiple ways to define the same grid based on a preference of how the coordinate points are defined. Consider the following regular grids, with a cellsCount of 2, a resolution of 0.5, and an interval of $[0, 1]$.



Listing 5 – Diagram illustrating a *Value-is-Area* regular grid

One way to describe this grid would be with the firstCoordinate at 0 and the relativeBounds as $[0, 0.5]$.

Another equivalent way to describe the same grid would be a firstCoordinate at 0.25 and the relativeBounds as $[-0.25, 0.25]$.

If the relativeBounds property is not provided, the default relative bounds of the cells are assumed to be $[-\text{resolution}/2, \text{resolution}/2]$. In other words, the cell, or the region

of validity of the measurement, is centered on each repeating point starting from the firstCoordinate.

For a *Value-is-Area* grid, the interval (or bbox for the spatial dimensions) will be resolution/2 larger in each direction compared to the same number of cells and same resolution for a *Value-is-Point* grid.

8.2.2. Irregular grids

Irregular grids are described by explicitly listing a sequence of coordinates (one for each cell).

Bounds for each coordinate can also be individually specified in a parallel boundsCoordinates array.

If the boundsCoordinates property is not included, the default bounds of the cells are assumed to lie in the middle of the two values specified in coordinates, and for the two extremities, the lower (for the first cell) and upper bounds (for the last cell) are assumed to be at the same distance from the specified coordinate as to their immediate neighbor.

8.2.3. Requirements for describing grids

REQUIREMENT 11

IDENTIFIER /req/umd-collection/grid-description

INCLUDED IN Requirements class 2: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/umd-collection>

A If data is organized as a regular or irregular grid for the temporal and any additional dimension, that dimension SHALL contain a grid object property describing the grid of that dimension.

B If data is organized as a regular or irregular grid for the spatial dimensions, the spatial object SHALL contain a grid array property, where each element is an object describing the grid of that dimension.

C If data is organized as a regular or irregular grid for a dimension, the grid object(s) for that dimension SHALL indicate the number of coordinates along the dimension in a cellsCount property.

- For values representing the whole area of contiguous cells spanning resolution units along the dimension, the cellsCount will be $(upperBound - lowerBound) / resolution$.
- For values representing infinitely small point cells spaced by resolution units along the dimension, the cellsCount will be $(upperBound - lowerBound) / resolution + 1$.

D For regularly gridded dimensions, the grid object SHALL contain a resolution property indicating the resolution of the grid in the unit of the unit property or the unit associated with the trs, vrs, or storageCrs in the case of the spatial dimensions (defaulting to [OGC:CRS84] if none is provided). The regular grid can be generated by incrementally adding the resolution starting from the lower bound of the overall interval.

E For irregularly gridded (or categorical) dimensions, the grid object SHALL contain a coordinates property indicating the list of valid coordinates where data is available along that dimension.

PERMISSION 3

IDENTIFIER /per/umd-collection/rec-categorical-dimension-interval

A For a categorical dimension, the first and the last categories listed in coordinates MAY be selected as the lower and upper bounds of the mandatory overall interval, or `null` MAY be used for both the lower and upper bounds.

9

REQUIREMENTS CLASSES FOR ENCODINGS

9.1. Overview

This clause specifies two requirements classes for encodings to be used with the Collections and Collection resources. These encodings are common representations for accessing spatial data on the web:

- HTML
- JSON

Neither of these encodings is mandatory. An implementation of the Collections requirements class may implement either, both, or neither of them.

9.2. Requirements Class “HTML”

Best practices for sharing geospatial data on the Web (W3C Best Practice) recommend supporting an HTML representation of API resources. For consistency with the Web, this should be done in a way that enables users and search engines to access all of the data they are authorized to access.

Providing an HTML representation for the landing page of a dataset, for listing available collections, and for describing detailed metadata about a particular collection allows users, using only their Web browser as a client, to evaluate the usefulness of data available from the API deployment before proceeding to access this data.

Additionally, an HTML representation of resources facilitate information discovery from Web search engines.

The HTML encoding should present all of the same information available in other representations such as the machine-readable JSON, so that users see this information in their browser in a way that naturally blends in with the rest of the institutional site, and ideally following Web Content Accessibility Guidelines.

Links that correspond to the *Link* class from the UML class diagram will be included as `<a/>` elements within the HTML `<body/>`, and could also be returned as HTTP response `Link:` headers.

REQUIREMENTS CLASS 3: HTML

| | |
|----------------------|---|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/req/html |
| TARGET TYPE | Web API |
| CONFORMANCE CLASS | Conformance class A.4: https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/html |
| PREREQUISITES | Requirements class 1: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections Schema.org HTML Living Standard |
| NORMATIVE STATEMENTS | Requirement 12: /req/html/definition Requirement 13: /req/html/content |

REQUIREMENT 12

| | |
|-------------|---|
| IDENTIFIER | /req/html/definition |
| INCLUDED IN | Requirements class 3: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/html |
| A | 200-responses of the server SHALL support the text/html media type for the list of Collections and Collection description resources. |

REQUIREMENT 13

| | |
|-------------|--|
| IDENTIFIER | /req/html/content |
| INCLUDED IN | Requirements class 3: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/html |
| A | Every 200-response of the API Implementation that has the media type “text/html” SHALL be a HTML 5 document that includes the following information in the HTML body: <ul style="list-style-type: none">• All information identified in the schemas of the Response Object in the HTML <body/>, and• All links in HTML <a/> elements in the HTML <body/>. |

RECOMMENDATION 7

| | |
|------------|--------------------------------------|
| IDENTIFIER | /rec/html/schema-org |
|------------|--------------------------------------|

RECOMMENDATION 7

| | |
|---|---|
| A | A 200-response for the /collections, /collections/{collectionId} and /collections/{collectionId}/schema resources with the media type text/html, SHOULD include Schema.org annotations. |
|---|---|

9.3. Requirements Class “JSON”

JSON is a text syntax that facilitates structured data interchange between programming languages. JSON is commonly used for Web-based software-to-software interchanges. Most Web developers are comfortable with using a JSON-based format, so supporting JSON is recommended for machine-to-machine interactions.

REQUIREMENTS CLASS 4: JSON

| | |
|----------------------|--|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/req/json |
| TARGET TYPE | Web API |
| CONFORMANCE CLASS | Conformance class A.3: https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/json |
| PREREQUISITES | Requirements class 1: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections IETF RFC 8259: The JavaScript Object Notation (JSON) Data Interchange Format JSON Schema |
| NORMATIVE STATEMENTS | Requirement 14: /req/json/definition Requirement 15: /req/json/content |

REQUIREMENT 14

| | |
|------------|----------------------|
| IDENTIFIER | /req/json/definition |
|------------|----------------------|

| | |
|-------------|---|
| INCLUDED IN | Requirements class 4: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/json |
| A | 200-responses of the server SHALL support the application/json media type for the list of Collections and Collection description resources. |

REQUIREMENT 15

IDENTIFIER /req/json/content

INCLUDED IN Requirements class 4: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/json>

- A** Every 200-response with the media type application/json SHALL include, or link to, a payload encoded according to the JSON Interchange Format.
- B** The schema of all responses with the media type application/json SHALL conform with the JSON Schema specified for that resource.

JSON Schema for the Collections and Collection responses are available at [collections.yaml](#) and [collectionDesc.yaml](#).

These are generic schemas that do not include any application schema information about specific resource types or their properties.

10

MEDIA TYPES

The media type for lists of collections and collection description as JSON is application/json.

The media type for HTML for all API resources would be text/html.

See also [OGC API – Common – Part 1: Core Media Types](#) section for additional media types such as Problem Details and OpenAPI API definitions.

Other media types used in OGC Standards can be found on [OGC Media Type Register](#).

See also the [IANA media type register](#).

A

ANNEX A (NORMATIVE) CONFORMANCE CLASS ABSTRACT TEST SUITE

ANNEX A (NORMATIVE)

CONFORMANCE CLASS ABSTRACT TEST SUITE

A.1. Introduction

OGC Web APIs are not Web Services in the traditional sense. Rather, they define the behavior and content of a set of Resources exposed through a Web Application Programming Interface (Web API). Therefore, an API may expose resources in addition to those defined by the standard. A test engine must be able to traverse the API, identify and validate test points, and ignore resource paths which are not to be tested.

The Conformance Classes addressed by this Abstract Test Suite are the:

- Collections Conformance Class
- Uniform Multi-Dimension Collection Conformance Class
- HTML Conformance Class
- JSON Conformance Class

A.2. Conformance Class Collections

CONFORMANCE CLASS A.1

IDENTIFIER <https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/collections>

**REQUIREMENTS
CLASS** Requirements class 1: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/collections>

TARGET TYPE Web API

CONFORMANCE CLASS A.1

CONFORMANCE TESTS

Abstract test A.1: /conf/collections/collections-list-op
Abstract test A.2: /conf/collections/collections-list-success
Abstract test A.3: /conf/collections/collections-list-links
Abstract test A.4: /conf/collections/collections-list-collections
Abstract test A.5: /conf/collections/description-op
Abstract test A.6: /conf/collections/description-success
Abstract test A.7: /conf/collections/description-links
Abstract test A.8: /conf/collections/description-extent
Abstract test A.9: /conf/collections/description-extent-multi

The Collections Conformance Class has a dependency on OGC API – Common – Part 1: Core’s “Core” conformance class, implying a dependency on HTTP and optionally HTTPS protocols:

<https://www.opengis.net/spec/ogcapi-common-1/1.0/conf/core>

Conformance with the Collections Conformance Class is demonstrated by execution, in order, of all abstract tests it consists of:

A.2.1. List of Collections (`/collections`) Tests

ABSTRACT TEST A.1

IDENTIFIER /conf/collections/collections-list-op

REQUIREMENT Requirement 1: /req/collections/collections-list-op

TEST PURPOSE Validate that information about the list of Collections can be retrieved from the expected location.

1. Issue an HTTP GET request without query parameters to the URL {root}/collections

TEST METHOD 2. Validate that a document was returned with a status code 200

3. Validate the contents of the returned document using test /conf/collections/collections-list-success.

ABSTRACT TEST A.2

IDENTIFIER /conf/collections/collections-list-success

REQUIREMENT Requirement 2: /req/collections/collections-list-success

TEST PURPOSE Validate that the list of Collections content complies with the required structure and contents.

ABSTRACT TEST A.2

| | |
|-------------|--|
| TEST METHOD | 1. Validate the list of Collections resource for all supported media types using the resources and tests identified in Table A.1 |
|-------------|--|

The list of Collections content may be retrieved in a number of different formats. The following table identifies the applicable schema document for each format and the test to be used to validate against that schema. All supported formats should be exercised.

Table A.1 – Schema and Tests for Collections content

| FORMAT | SCHEMA DOCUMENT | TEST ID |
|--------|----------------------------------|--------------------|
| HTML | collections.yaml | /conf/html/content |
| JSON | collections.yaml | /conf/json/content |

ABSTRACT TEST A.3

| | |
|------------|--|
| IDENTIFIER | /conf/collections/collections-list-links |
|------------|--|

| | |
|-------------|--|
| REQUIREMENT | Requirement 3: /req/collections/collections-list-links |
|-------------|--|

| | |
|--------------|--|
| TEST PURPOSE | Validate that the required links are included in the Collections document. |
|--------------|--|

Verify that the response document includes:

1. a link to this response document (relation: self),
2. a link to the response document in every other media type supported by the server (relation: alternate).

| | |
|-------------|---|
| TEST METHOD | Verify that all links include the rel and type link parameters. |
|-------------|---|

Verify that all links include the rel and type link parameters.

ABSTRACT TEST A.4

| | |
|------------|--|
| IDENTIFIER | /conf/collections/collections-list-collections |
|------------|--|

| | |
|-------------|--|
| REQUIREMENT | Requirement 4: /req/collections/collections-list-collections |
|-------------|--|

| | |
|--------------|---|
| TEST PURPOSE | Validate that each collection accessible through the API Implementation is described in the Collections document. |
|--------------|---|

1. Verify that the Collections document includes a collections property.
2. Verify that the collections property is an array.

ABSTRACT TEST A.4

3. Verify that there is an entry in the collections property for each resource collection accessible through the API.
4. Verify that each entry in the collections array is valid according to /conf/collections/description-success.

A.2.2. Collection Description (/collections/{collectionId}) Tests

ABSTRACT TEST A.5

IDENTIFIER /conf/collections/description-op

REQUIREMENT Requirement 5: /req/collections/description-op

TEST PURPOSE Validate that the Collection description content can be retrieved from the expected location.

For every Collection described in the list of Collections resource at /collections, issue an HTTP GET request to the URL /collections/{collectionId} where {collectionId} is the id property for the collection.

TEST METHOD

1. Validate that a Collection description was returned with a status code 200
2. Validate the contents of the returned document using test /conf/collections/description-success.

ABSTRACT TEST A.6

IDENTIFIER /conf/collections/description-success

REQUIREMENT Requirement 6: /req/collections/description-success

TEST PURPOSE Validate that a Collection document complies with the required structure, contents and values.

For each Collection description (/collections/{collectionId}) resource, validate:

TEST METHOD

1. That the Collection description resource includes an id property.
2. Validate the content of the Collection resource for all supported media types using the resources and tests identified in Table A.2
3. Verify that the content of the response is consistent with the content for the corresponding collection in the response to the / collections resource. That is, the values for id, title, description and extent are identical.

The Collection description content may be retrieved in a number of different formats. The following table identifies the applicable schema document for each format and the test to be used to validate against that schema. All supported formats should be exercised.

Table A.2 – Schema and Tests for Collection content

| FORMAT | SCHEMA DOCUMENT | TEST ID |
|--------|-------------------------------------|--------------------|
| HTML | collectionDesc.yaml | /conf/html/content |
| JSON | collectionDesc.yaml | /conf/json/content |

ABSTRACT TEST A.7

IDENTIFIER /conf/collections/description-links

REQUIREMENT Requirement 7: /req/collections/description-links

TEST PURPOSE Validate that a Collection document includes all required links.

1. Verify that the Collection document includes a `links` property.
2. Verify that the `links` property includes an item which refers back to the Collection document (relation: `self`).
3. Verify that the `links` property includes an item for each supported encoding of this Collection document and that each of these items includes a `href` to an appropriate resource (relation: `alternate`).
4. Verify that all links include the `rel` and `type` link parameters.

ABSTRACT TEST A.8

IDENTIFIER /conf/collections/description-extent

REQUIREMENT Requirement 8: /req/collections/description-extent

TEST PURPOSE Validate the extent property if it is present

If the `extent` property is present, then:

1. Verify that the extent provides bounding boxes that include all spatial geometries in the collection.
2. Verify that the extent provides time intervals that include all temporal geometries in the collection.

NOTE: A temporal extent of `null` indicates a half-bounded or unbounded time interval.

ABSTRACT TEST A.9

IDENTIFIER /conf/collections/description-extent-multi

REQUIREMENT Requirement 9: /req/collections/description-extent-multi

TEST PURPOSE Validate the consistency of multi-elements extents property if applicable

If the extent property is present, then:

1. Verify that for spatial properties having more than a single bounding box, all bounding boxes are included within the first bounding box.

TEST METHOD

2. Verify that for temporal properties (as well as for additional properties if conforming to Uniform Multi-dimension Collection) having more than a single interval, all intervals are within the first interval. NOTE: A temporal extent of null indicates a half-bounded or unbounded time interval.

A.3. Conformance Class Uniform Multi-Dimension Collection

CONFORMANCE CLASS A.2

IDENTIFIER <https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/umd-collection>

REQUIREMENTS CLASS Requirements class 2: <https://www.opengis.net/spec/ogcapi-common-2/1.0/req/umc-collection>

TARGET TYPE Web API

CONFORMANCE TESTS Abstract test A.10: /conf/umd-collection/extent-uad-definition
Abstract test A.11: /conf/umd-collection/grid-description

A.3.1. Abstract Test for Uniform Multi-Dimension Collection Definition

ABSTRACT TEST A.10

IDENTIFIER /conf/umd-collection/extent-uad-definition

REQUIREMENT Requirement 10: /req/umd-collection/extent-uad-definition

ABSTRACT TEST A.10

| | |
|---------------------|---|
| TEST PURPOSE | To verify that the collection descriptions follow the uniform schema for describing multi-dimensional data collections |
| TEST METHOD | <p>For each additional dimension beyond spatial and temporal:</p> <ol style="list-style-type: none">1. Validate that the dimension property includes an <code>interval</code> property,2. Validate that the dimension property includes a <code>trs</code>, <code>vrs</code> or <code>definition</code>,3. Validate that the dimension property includes a <code>unit</code> if the <code>trs</code>, <code>vrs</code> or <code>definition</code> does not imply a specific unit. |
| DESCRIPTION | <p>NOTE 1: The first two aspects of this validation can be performed by swapping the <code>extent.yaml</code> schema included by <code>collectionDesc.yaml</code> by a version where the <code>- type: object</code> within the <code>anyOf</code> has been removed, as per the comment saying <i>To validate against the Uniform Additional Dimensions requirements class, remove or comment out the following line.</i></p> |

ABSTRACT TEST A.11

| | |
|---------------------|--|
| IDENTIFIER | /conf/umd-collection/grid-description |
| REQUIREMENT | Requirement 11: /req/umd-collection/grid-description |
| TEST PURPOSE | Validate that the grid of gridded data is described |
| TEST METHOD | <p>For each dimension of the extents, including spatial and temporal as well as additional dimensions:</p> <ol style="list-style-type: none">1. If the data is known or described as being organized according to a specific regular or irregular grid, validate that the dimension property includes a <code>grid</code> property.2. If the data is known or described as being organized according to a regular grid, validate that the <code>grid</code> property validates against <code>regularGrid.yaml</code>3. If the data is known or described as being organized according to an irregular grid, validate that the <code>grid</code> property validates against <code>irregularGrid.yaml</code> |
| DESCRIPTION | <p>NOTE 2: The <code>grid</code> property can be included whether an Implementation conforms to Uniform Additional Dimension or not, but grid description is mandatory for gridded data when conforming to this Conformance Class.</p> |

A.4. Conformance Class JSON

CONFORMANCE CLASS A.3

| | |
|--------------------|---|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/json |
| REQUIREMENTS CLASS | Requirements class 4: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/json |
| TARGET TYPE | Web API |
| CONFORMANCE TESTS | Abstract test A.12: /conf/json/definition Abstract test A.13: /conf/json/content |

A.4.1. JSON Definition

ABSTRACT TEST A.12

| | |
|--------------|---|
| IDENTIFIER | /conf/json/definition |
| REQUIREMENT | Requirement 14: /req/json/definition |
| TEST PURPOSE | Verify support for JSON |
| TEST METHOD | <ol style="list-style-type: none">1. A resource is requested with response media type of application/json2. All 200-responses SHALL support the media type application/json. |

A.4.2. JSON Content

ABSTRACT TEST A.13

| | |
|--------------|--|
| IDENTIFIER | /conf/json/content |
| REQUIREMENT | Requirement 15: /req/json/content |
| TEST PURPOSE | Verify the content of a JSON document given an input document and schema. |
| TEST METHOD | <ol style="list-style-type: none">1. Validate that the document is a JSON document.2. Validate the document against the schema using a JSON Schema validator. |

A.5. Conformance Class HTML

CONFORMANCE CLASS A.4

| | |
|--------------------|---|
| IDENTIFIER | https://www.opengis.net/spec/ogcapi-common-2/1.0/conf/html |
| REQUIREMENTS CLASS | Requirements class 3: https://www.opengis.net/spec/ogcapi-common-2/1.0/req/html |
| TARGET TYPE | Web API |
| CONFORMANCE TESTS | Abstract test A.14: /conf/html/definition Abstract test A.15: /conf/html/content |

A.5.1. HTML Definition

ABSTRACT TEST A.14

| | |
|--------------|---|
| IDENTIFIER | /conf/html/definition |
| REQUIREMENT | Requirement 12: /req/html/definition |
| TEST PURPOSE | Verify support for HTML |
| TEST METHOD | Verify that every 200-response of every operation of the API Implementation where HTML was requested is of media type text/html |

A.5.2. HTML Content

ABSTRACT TEST A.15

| | |
|--------------|--|
| IDENTIFIER | /conf/html/content |
| REQUIREMENT | Requirement 13: /req/html/content |
| TEST PURPOSE | Verify the content of an HTML document given an input document and schema. |
| TEST METHOD | <ol style="list-style-type: none">1. Validate that the document is an HTML 5 document2. Manually inspect the document against the schema. |



B

ANNEX B (INFORMATIVE) CLASS MODEL AS TABLES

B

ANNEX B (INFORMATIVE) CLASS MODEL AS TABLES

B.1. OGC API – Common package

B.1.1. OGC API – Common overview

B.1.2. Defining tables

Table B.1 – Elements of “OGC API – Common::” ()

| | |
|--------------|-----------|
| NAME | |
| DEFINITION | |
| STEREOTYPE | interface |
| ABSTRACT | False |
| ASSOCIATIONS | (none) |
| ATTRIBUTES | (none) |
| CONSTRAINTS | (none) |

Table B.2 – Elements of “OGC API – Common::OGC API – Common – Part 1” ()

| | |
|------------|---------------------------|
| NAME | OGC API – Common – Part 1 |
| DEFINITION | |

| | |
|--------------|-----------|
| STEREOTYPE | interface |
| ABSTRACT | False |
| ASSOCIATIONS | (none) |
| ATTRIBUTES | (none) |
| CONSTRAINTS | (none) |

Table B.3 – Elements of “OGC API – Common::OGC API – Common – Part 2” ()

| | |
|-------------------|---------------------------|
| NAME | OGC API – Common – Part 2 |
| DEFINITION | |
| STEREOTYPE | interface |
| ABSTRACT | False |
| ASSOCIATIONS | (none) |
| ATTRIBUTES | (none) |
| CONSTRAINTS | (none) |

Table B.4 – Elements of “OGC API – Common::OGC API – Records” ()

| | |
|-------------------|-------------------|
| NAME | OGC API – Records |
| DEFINITION | |
| STEREOTYPE | interface |
| ABSTRACT | False |
| ASSOCIATIONS | (none) |
| ATTRIBUTES | (none) |
| CONSTRAINTS | (none) |

Table B.5 – Elements of “OGC API – Common::Uniform Additional Dimensions” ()

| | |
|---------------------|-------------------------------|
| NAME | Uniform Additional Dimensions |
| DEFINITION | |
| STEREOTYPE | interface |
| ABSTRACT | False |
| ASSOCIATIONS | (none) |
| ATTRIBUTES | (none) |
| CONSTRAINTS | (none) |

Table B.6 – Elements of “OGC API – Common::Address” ()

| | | | |
|---------------------|--------------------------------|-------------|---|
| NAME | Address | | |
| DEFINITION | Postal address of the resource | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| ATTRIBUTES | NAME | TYPE | DEFINITION |
| | deliveryPoint [*] | String | Address lines for the location (e.g. street name and door number) |
| | city [0..1] | String | City for the location |
| | administrativeArea [0..1] | String | State or province of the location |
| | postalCode [0..1] | String | ZIP or other postal code |
| | country [0..1] | String | Country of the physical address. ISO 3166-1 is recommended |
| | role [*] | String | The type of postal address (e.g. office, home, etc.) |
| CONSTRAINTS | (none) | | |

Table B.7 – Elements of “OGC API – Common::BBox” (Array)

| | | | |
|--------------|---|------|---|
| NAME | BBox | | |
| DEFINITION | A sorted list of 4 (2D) or 6 (3D) coordinates | | |
| STEREOTYPE | Array | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| ATTRIBUTES | NAME | TYPE | DEFINITION |
| | item [4..6] | Real | A sorted list of 4 (2D) or 6 (3D) coordinates |
| CONSTRAINTS | (none) | | |

Table B.8 – Elements of “OGC API – Common::CollectionDescription” ()

| | | | |
|--------------|--|-----------------------|--|
| NAME | CollectionDescription | | |
| DEFINITION | Description of a collection. It is returned by the Web API at \collections{collectionId} | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | NAME | TYPE | DEFINITION |
| | Collections | Collections | (none) |
| | source:(self) [none] | Collections | (none) |
| | target:collection [1..*] | CollectionDescription | (none) |
| ATTRIBUTES | NAME | TYPE | DEFINITION |
| | id [1] | String | Identifier of the collection (sometimes referred as collectionId). It is used in the Web API as path parameter in \collections{collectionId} |
| | title [0..1] | String | A short, human-readable summary of the collection |

| | | |
|-----------------------------|---------------------------|---|
| description [0..1] | String | A human-readable explanation about data in the collection |
| attribution [0..1] | String | For the collection that can contain markup text whose format may be indicated in the <code>attributionMediaType</code> property. That format can be either plain text (<code>text/plain</code>), HTML (<code>text/html</code>) or <u>Common Mark</u> (<code>text/markdown</code>) |
| attributionMediaType [0..1] | AttributionMediaType Code | Media type for the markup language of the attribution: It can be either plain text (<code>text/plain</code>), HTML (<code>text/html</code>) or <u>Common Mark</u> (<code>text/markdown</code>). |
| accessConstraints [0..1] | AccessConstraintsCode | Restrictions on the availability of the collection that the user needs to be aware of before using or redistributing the data. |
| parent [0..1] | String | A id of a collection that is the parent of this collection in a hierarchical relation. For example a rivers' collection can have an topographic collection as parent. |
| publisher [0..1] | String | Organization or individual responsible for making the data available |
| license [0..1] | String | The legal provisions under which the data of this collection is made available |
| rights [0..1] | String | A statement that concerns all rights not addressed by the license such as a copyright statement |
| keywords [0..1] | String | The topic or topics of the resource. Typically represented using free-form keywords, tags, key phrases, or classification codes |
| itemType [0..1] | String | Indicator about the type of the items in the collection if the collection has an accessible / collections/{collectionId}/items endpoint |
| dataType [0..1] | String | Type of data use to represent the data in the collection. Can be map, vector or coverage |
| geoDataClass [*] | anyURI | URIs identifying a class of data contained in the geospatial data (useful for example to determine compatibility with styles or processes) |
| defaultField [*] | String | A sorted list of field names. For a features data access mechanism , it is the list of returnable properties included by default and complementing the geometry of the features. For a coverage data access mechanism, they are names of fields whose |

| | | |
|-----------------------------|----------|--|
| | | values are included by default. Note that an API may provide a mechanism (e.g. a query parameter called 'properties' or 'exclude-properties') to override this default list in customized responses. |
| crs [*] | String | The list of coordinate reference systems supported by the API; the first item is the default coordinate reference system |
| storageCrs [0..1] | String | The native coordinate reference system (i.e., the most efficient CRS in which to request the data, possibly how the data is stored on the server); this is the default output coordinate reference system for Maps and Coverages |
| epoch [0..1] | Real | Epoch of the native (storage) Coordinate Reference System (CRS) |
| geometryDimension [0..1] | Integer | Number of spatial dimensions of the primary geometry of individual elements of the data: 0 for points, 1 for curves, 2 for surfaces, 3 for solids and unspecified when mixed or unknown. Not to be confused with the dimensions of the domain which are defined by the extent element. |
| minScaleDenominator [0..1] | Real | Minimum scale denominator for usage of the collection |
| maxScale Denominator [0..1] | Real | Maximum scale denominator for usage of the collection |
| minCellSize [0..1] | Real | Minimum cell size for usage of the collection |
| maxCellSize [0..1] | Real | Maximum cell size for usage of the collection |
| created [0..1] | DateTime | Timestamp indicating when the data in the collection was first produced |
| updated [0..1] | DateTime | Timestamp of the last change/revision to the data in the collection |
| CONSTRAINTS | (none) | |

Table B.9 – Elements of “OGC API – Common::Collections” ()

| | |
|-------------------|--|
| NAME | Collections |
| DEFINITION | A set of geospatial resources that may be available as one or more sub-resource distributions. It is returned by the Web API at \collections |

| STEREOTYPE | interface | | |
|--------------|--------------------------|-----------------------|---|
| ABSTRACT | False | | |
| | NAME | TYPE | DEFINITION |
| ASSOCIATIONS | CollectionDescription | CollectionDescription | (none) |
| | source:(self) [none] | Collections | (none) |
| | target:collection [1..*] | CollectionDescription | (none) |
| | NAME | TYPE | DEFINITION |
| ATTRIBUTES | numberMatched [0..1] | Integer | Number of elements in the response that match the selection parameters like bbox. |
| | numberReturned [0..1] | Integer | Number of elements in the response. Omitted unknown or difficult to compute |
| CONSTRAINTS | (none) | | |

Table B.10 – Elements of “OGC API – Common::Concept” ()

| NAME | Concept | | |
|--------------|-----------------------------------|--------|--|
| DEFINITION | A concept defined in a vocabulary | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| | NAME | TYPE | DEFINITION |
| ATTRIBUTES | id [1] | String | Identifier for the concept in the knowledge system |
| | title [0..1] | String | A human readable title for the concept |
| | description [0..1] | String | A human readable description for the concept |
| | definition [0..1] | anyURI | A URI providing further description of the concept |

| | |
|--------------------|--------|
| CONSTRAINTS | (none) |
|--------------------|--------|

Table B.11 – Elements of “OGC API – Common::ConformanceClasses” ()

| NAME | ConformanceClasses | | | | | | |
|---------------------|---|--|------|------------|-------------------|--------|--|
| DEFINITION | A declaration of the conformance classes that the API conforms to. It is returned by the Web API at \conformance | | | | | | |
| STEREOTYPE | interface | | | | | | |
| ABSTRACT | False | | | | | | |
| ASSOCIATIONS | (none) | | | | | | |
| ATTRIBUTES | <table> <thead> <tr> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>conformsTo [1..*]</td> <td>anyURI</td> <td>A conformance class URLs from the ones defined in the OGC API standard documents</td> </tr> </tbody> </table> | NAME | TYPE | DEFINITION | conformsTo [1..*] | anyURI | A conformance class URLs from the ones defined in the OGC API standard documents |
| NAME | TYPE | DEFINITION | | | | | |
| conformsTo [1..*] | anyURI | A conformance class URLs from the ones defined in the OGC API standard documents | | | | | |
| CONSTRAINTS | (none) | | | | | | |

Table B.12 – Elements of “OGC API – Common::Contact” ()

| NAME | Contact | | | | | | | | | | | | | | | |
|---------------------|---|---|------|------------|-----------|--------|--|-------------|--------|------------------------------------|-----------------|--------|---|---------------------|--------|---|
| DEFINITION | Contact point of the resource. It can be a person or an organization | | | | | | | | | | | | | | | |
| STEREOTYPE | interface | | | | | | | | | | | | | | | |
| ABSTRACT | False | | | | | | | | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | | | | | | | | |
| ATTRIBUTES | <table> <thead> <tr> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>id [0..1]</td> <td>String</td> <td>A value uniquely identifying a contact</td> </tr> <tr> <td>name [0..1]</td> <td>String</td> <td>The name of the responsible person</td> </tr> <tr> <td>position [0..1]</td> <td>String</td> <td>The name of the role or position of the responsible person taken from the organization's formal organizational hierarchy or chart</td> </tr> <tr> <td>organization [0..1]</td> <td>String</td> <td>Organization/affiliation of the contact</td> </tr> </tbody> </table> | NAME | TYPE | DEFINITION | id [0..1] | String | A value uniquely identifying a contact | name [0..1] | String | The name of the responsible person | position [0..1] | String | The name of the role or position of the responsible person taken from the organization's formal organizational hierarchy or chart | organization [0..1] | String | Organization/affiliation of the contact |
| NAME | TYPE | DEFINITION | | | | | | | | | | | | | | |
| id [0..1] | String | A value uniquely identifying a contact | | | | | | | | | | | | | | |
| name [0..1] | String | The name of the responsible person | | | | | | | | | | | | | | |
| position [0..1] | String | The name of the role or position of the responsible person taken from the organization's formal organizational hierarchy or chart | | | | | | | | | | | | | | |
| organization [0..1] | String | Organization/affiliation of the contact | | | | | | | | | | | | | | |

| | | |
|----------------------------|--------|---|
| hoursOfService [0..1] | String | Time period when the contact can be contacted |
| contactInstructions [0..1] | String | Supplemental instructions on how or when to contact can be made |
| role [*] | String | The set of named duties, job functions and/or permissions associated with this contact. (e.g. developer, administrator, etc.) |
| CONSTRAINTS (none) | | |

Table B.13 – Elements of “OGC API – Common::Coordinates” (Array)

| | | | |
|-------------------|-------------|--------------|------------|
| NAME | Coordinates | | |
| DEFINITION | | | |
| STEREOTYPE | Array | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| ATTRIBUTES | NAME | TYPE | DEFINITION |
| | item [1..*] | Real, String | (none) |
| CONSTRAINTS | (none) | | |

Table B.14 – Elements of “OGC API – Common::Email” ()

| | | | |
|--------------|-------------------------------|--------|-------------------------------|
| NAME | Email | | |
| DEFINITION | Email address of the resource | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| ATTRIBUTES | NAME | TYPE | DEFINITION |
| | value [1] | String | The value is the email itself |

| | | |
|-------------|--------|---|
| role [*] | String | The type of email (e.g. home, work, etc.) |
| CONSTRAINTS | (none) | |

Table B.15 – Elements of “OGC API – Common::Exception” ()

| NAME | Exception | | |
|--------------|---|--------|---|
| DEFINITION | A schema for exceptions based on RFC 7807. It is returned by the Web API in case of an error retrieving the API resources | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| | NAME | TYPE | DEFINITION |
| ATTRIBUTES | type [1..*] | String | A URI that identifies the problem type. When this member is not present, its value is assumed to be about:blank |
| | title [1] | String | A short, human-readable summary of the problem type. It should not change from occurrence to occurrence of the problem |
| | status [1] | String | The HTTP status code generated by the server for this occurrence of the problem |
| | detail [1] | String | A human-readable explanation specific to this occurrence of the problem |
| | instance [1] | String | A URI reference that identifies the specific occurrence of the problem. It may or may not yield further information if dereferenced |
| CONSTRAINTS | (none) | | |

Table B.16 – Elements of “OGC API – Common::Extent” ()

| | | |
|------------|---|--|
| NAME | Extent | |
| DEFINITION | The extent of the resource with spatial, temporal optional Uniform Additional Dimensions (UAD) schema. The first item in the arrays for bbox or interval describe the overall extent of the data. All subsequent items describe more precise extents, e.g., to identify clusters of data. | |
| STEREOTYPE | interface | |

| | | |
|---------------------------------|----------------|--------|
| ABSTRACT | False | |
| NAME | | |
| OtherDimension | OtherDimension | (none) |
| source:(self) [none] | Extent | (none) |
| target:(otherDimensions) [0..*] | OtherDimension | (none) |
| SpatialExtent | SpatialExtent | (none) |
| ASSOCIATIONS | | |
| source:(self) [none] | Extent | (none) |
| target:spatial [0..1] | SpatialExtent | (none) |
| TemporalExtent | TemporalExtent | (none) |
| source:(self) [none] | Extent | (none) |
| target:temporal [0..1] | TemporalExtent | (none) |
| ATTRIBUTES | | |
| (none) | | |
| CONSTRAINTS | | |
| (none) | | |

Table B.17 – Elements of “OGC API – Common::Fields” (Array)

| | |
|---------------------|-------------|
| NAME | Fields |
| DEFINITION | |
| STEREOTYPE | |
| Array | |
| ABSTRACT | |
| False | |
| ASSOCIATIONS | |
| (none) | |
| ATTRIBUTES | |
| NAME | TYPE |
| item [*] | (none) |
| CONSTRAINTS | |
| (none) | |

Table B.18 – Elements of “OGC API – Common::Format” ()

| NAME | Format | | | | | | | | |
|--------------|--|------------------|--|------|------------|------------|---------------------------------|------------------|--|
| DEFINITION | Format of the resource | | | | | | | | |
| STEREOTYPE | interface | | | | | | | | |
| ABSTRACT | False | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>ATTRIBUTES</td> <td> name [0..1] mediaType [0..1] </td> <td> String String </td> <td> Name of the format Media type of the format </td> </tr> </tbody> </table> | | NAME | TYPE | DEFINITION | ATTRIBUTES | name [0..1] mediaType [0..1] | String String | Name of the format Media type of the format |
| | NAME | TYPE | DEFINITION | | | | | | |
| ATTRIBUTES | name [0..1] mediaType [0..1] | String String | Name of the format Media type of the format | | | | | | |
| CONSTRAINTS | (none) | | | | | | | | |

Table B.19 – Elements of “OGC API – Common::Grid” (abstract)

| NAME | Grid | | | | | | | | |
|-------------------|---|-----------------|---|------|------------|------------|----------------|-----------------|---|
| DEFINITION | Provides information about the limited availability of data within the collection organized as a grid (regular or irregular) along the dimension. | | | | | | | | |
| STEREOTYPE | abstract | | | | | | | | |
| GENERALIZATION OF | IrregularGrid, RegularGrid | | | | | | | | |
| ABSTRACT | True | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>ATTRIBUTES</td> <td> cellsCount [1] </td> <td> UnsignedInteger </td> <td> Number of samples available along the dimension for data organized as a regular or irregular grid </td> </tr> </tbody> </table> | | NAME | TYPE | DEFINITION | ATTRIBUTES | cellsCount [1] | UnsignedInteger | Number of samples available along the dimension for data organized as a regular or irregular grid |
| | NAME | TYPE | DEFINITION | | | | | | |
| ATTRIBUTES | cellsCount [1] | UnsignedInteger | Number of samples available along the dimension for data organized as a regular or irregular grid | | | | | | |
| CONSTRAINTS | (none) | | | | | | | | |

Table B.20 – Elements of “OGC API – Common::Interval” (type)

| NAME | Interval | | | | | | |
|--------------|--|------------|------|------------|-------------|--------------|--------|
| DEFINITION | Commonly a sorted list of a pair of numbers, but it is string to support for example for a pair of dates in ISO format | | | | | | |
| STEREOTYPE | type | | | | | | |
| ABSTRACT | False | | | | | | |
| ASSOCIATIONS | (none) | | | | | | |
| ATTRIBUTES | <table><thead><tr><th>NAME</th><th>TYPE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>item [2..2]</td><td>Real, String</td><td>(none)</td></tr></tbody></table> | NAME | TYPE | DEFINITION | item [2..2] | Real, String | (none) |
| NAME | TYPE | DEFINITION | | | | | |
| item [2..2] | Real, String | (none) | | | | | |
| CONSTRAINTS | (none) | | | | | | |

Table B.21 – Elements of “OGC API – Common::IrregularGrid” ()

| NAME | IrregularGrid | | | | | | | | | |
|-----------------------|--|---|------|------------|--------------------|--------------|---|-----------------------|----------|---|
| DEFINITION | Irregular grid description using synchronized lists of coordinates and its bounds. | | | | | | | | | |
| STEREOTYPE | interface | | | | | | | | | |
| INHERITS FROM | Grid | | | | | | | | | |
| ABSTRACT | False | | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | | |
| ATTRIBUTES | <table><thead><tr><th>NAME</th><th>TYPE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>Coordinates [1..*]</td><td>Real, String</td><td>Sorted list of coordinates along the dimension for which data organized as an irregular grid in the collection is available (e.g., 2, 10, 80, 100).</td></tr><tr><td>boundsCoordinates [*]</td><td>Interval</td><td>Sorted list of coordinates of the lower and upper bounds of each cell in absolute units for irregular grids describing the geometry each cell</td></tr></tbody></table> | NAME | TYPE | DEFINITION | Coordinates [1..*] | Real, String | Sorted list of coordinates along the dimension for which data organized as an irregular grid in the collection is available (e.g., 2, 10, 80, 100). | boundsCoordinates [*] | Interval | Sorted list of coordinates of the lower and upper bounds of each cell in absolute units for irregular grids describing the geometry each cell |
| NAME | TYPE | DEFINITION | | | | | | | | |
| Coordinates [1..*] | Real, String | Sorted list of coordinates along the dimension for which data organized as an irregular grid in the collection is available (e.g., 2, 10, 80, 100). | | | | | | | | |
| boundsCoordinates [*] | Interval | Sorted list of coordinates of the lower and upper bounds of each cell in absolute units for irregular grids describing the geometry each cell | | | | | | | | |
| CONSTRAINTS | (none) | | | | | | | | | |

Table B.22 – Elements of “OGC API – Common::LandingPage” ()

| NAME | LandingPage | | |
|---------------------|---|-------------|---|
| DEFINITION | Provides the information needed to navigate all the resources exposed through the API. It is returned by the Web API at the root node Web API endpoint. | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| | NAME | TYPE | DEFINITION |
| | title [*] | String | The title of the API. While a title is not required, implementors are strongly advised to include one |
| | description [0..1] | String | A longer description of the API. |
| | attribution [0..1] | String | The attribution of the API should be short and intended for presentation to a user, for example, in a corner of a map. Parts of the text can be links to other resources if additional information is needed. The string can include HTML markup or markdown. |
| ATTRIBUTES | <p>attributionMediaType [0..1]</p> <p>AttributionMediaTypeCode</p> <p>The ‘attribution’ can contain markup text whose format may be indicated in the <code>attributionMediaType</code> property (e.g., <code>text/html</code> for HTML or <code>text/markdown</code> for CommonMark). If the ‘<code>attributionMediaType</code>’ indicates something other than <code>text/plain</code>, the <code>attribution</code> element string should be interpreted by a markup parser selected based on that media type to be presented to the user (e.g., <code>text/markdown</code> will be parsed by a library supporting Common Mark). By allowing markup, the attribution string can import images (e.g., organization logos) and format the text (e.g., the name of the organization in italics).</p> | | |
| CONSTRAINTS | (none) | | |

Table B.23 – Elements of “OGC API – Common::Link” (type)

| NAME | Link | | |
|--------------|--|---------|--|
| DEFINITION | An expression of a relationship between resources. | | |
| STEREOTYPE | type | | |
| ABSTRACT | False | | |
| ASSOCIATIONS | (none) | | |
| | NAME | TYPE | DEFINITION |
| ATTRIBUTES | href [1] | String | URI to a remote resource (or resource fragment) |
| | rel [1] | String | The type or semantics of the relation |
| | type [0..1] | String | A hint indicating what the media type of the result of dereferencing the link should be. |
| | hreflang [0..1] | String | A hint indicating what the language of the result of dereferencing the link should be. |
| | title [0..1] | String | Used to label the destination of a link such that it can be used as a human-readable description |
| | length [0..1] | Integer | A hint indicating the Content-length of the result of dereferencing the link should be |
| CONSTRAINTS | (none) | | |

Table B.24 – Elements of “OGC API – Common::OtherDimension” ()

| NAME | OtherDimension | | |
|--------------|--|--------|------------|
| DEFINITION | Other dimension definition and interval. First Interval is the overall interval and additional ones are spaced within the overall Interval | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| | NAME | TYPE | DEFINITION |
| ASSOCIATIONS | Extent | Extent | (none) |
| | source:(self) [none] | Extent | (none) |

| | | |
|----------------------------------|----------------|---|
| target:(other Dimensions) [0..*] | OtherDimension | (none) |
| NAME | TYPE | DEFINITION |
| interval [1..*] | Interval | Sorted list of one or more intervals that describe the extent for this dimension of the dataset. The value null is supported and indicates an unbounded or half-bounded interval. The first interval describes the overall extent of the data for this dimension. All subsequent intervals describe more precise intervals, e.g., to identify clusters of data. Clients only interested in the overall extent will only need to access the first item (a pair of lower and upper bound values). |
| ATTRIBUTES | | |
| trs [0..1] | String | Temporal Coordinate Reference System (e.g. as defined by Features for 'temporal') |
| vrs [0..1] | String | Vertical Coordinate Reference System (e.g. as defined in EDR for 'vertical') |
| definition [0..1] | anyURI | A URI to the definition of the measured or observed property corresponding to this dimension |
| unit [0..1] | String | The unit of measure in which the interval and/or grid values are expressed |
| unitLang [0..1] | anyURI | The language (or vocabulary) in which the unit is expressed (defaults to "UCUM" if not specified) |
| variableType [0..1] | VariableType | The type of variable which may inform correct interpretation and interpolation methods |
| CONSTRAINTS | (none) | |

Table B.25 – Elements of “OGC API – Common::Phone” ()

| NAME | Phone | | | | | | |
|---------------------|--|--------------------------------------|-------------|-------------------|-----------|--------|--------------------------------------|
| DEFINITION | Phone or Fax of the resource | | | | | | |
| STEREOTYPE | interface | | | | | | |
| ABSTRACT | False | | | | | | |
| ASSOCIATIONS | (none) | | | | | | |
| ATTRIBUTES | <table border="1"> <thead> <tr> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>value [1]</td> <td>String</td> <td>The value is the phone number itself</td></tr> </tbody> </table> | NAME | TYPE | DEFINITION | value [1] | String | The value is the phone number itself |
| NAME | TYPE | DEFINITION | | | | | |
| value [1] | String | The value is the phone number itself | | | | | |

| | | |
|-------------|--------|---|
| role [*] | String | The type of phone number (e.g. home, work, fax, etc.) |
| CONSTRAINTS | (none) | |

Table B.26 – Elements of “OGC API – Common::RegularGrid” ()

| NAME | RegularGrid | | | | | | | | | | | | | |
|-----------------------|---|---|------|------------|---------------------|--------------|---|----------------|--------------|---|-----------------------|----------|--|--|
| DEFINITION | Resolution of regularly gridded data along the dimension in the collection. | | | | | | | | | | | | | |
| STEREOTYPE | interface | | | | | | | | | | | | | |
| INHERITS FROM | Grid | | | | | | | | | | | | | |
| ABSTRACT | False | | | | | | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | | | | | | |
| ATTRIBUTES | <table border="1"> <thead> <tr> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>firstCoordinate [1]</td> <td>Real, String</td> <td>First coordinate where a regular grid begins, with subsequent coordinates adding resolution unit at each step. Commonly is a number but can be a string to support date first coordinates</td> </tr> <tr> <td>resolution [1]</td> <td>Real, String</td> <td>Resolution of regularly gridded data along the dimension in the collection. Commonly is a number but can be a string to support date resolution</td> </tr> <tr> <td>relativeBounds [0..1]</td> <td>Interval</td> <td>Distance in units from coordinate to the lower and upper bounds of each cell for regular grids, describing the geometry of the cells</td> </tr> </tbody> </table> | NAME | TYPE | DEFINITION | firstCoordinate [1] | Real, String | First coordinate where a regular grid begins, with subsequent coordinates adding resolution unit at each step. Commonly is a number but can be a string to support date first coordinates | resolution [1] | Real, String | Resolution of regularly gridded data along the dimension in the collection. Commonly is a number but can be a string to support date resolution | relativeBounds [0..1] | Interval | Distance in units from coordinate to the lower and upper bounds of each cell for regular grids, describing the geometry of the cells | |
| NAME | TYPE | DEFINITION | | | | | | | | | | | | |
| firstCoordinate [1] | Real, String | First coordinate where a regular grid begins, with subsequent coordinates adding resolution unit at each step. Commonly is a number but can be a string to support date first coordinates | | | | | | | | | | | | |
| resolution [1] | Real, String | Resolution of regularly gridded data along the dimension in the collection. Commonly is a number but can be a string to support date resolution | | | | | | | | | | | | |
| relativeBounds [0..1] | Interval | Distance in units from coordinate to the lower and upper bounds of each cell for regular grids, describing the geometry of the cells | | | | | | | | | | | | |
| CONSTRAINTS | (none) | | | | | | | | | | | | | |

Table B.27 – Elements of “OGC API – Common::ResourceLanguage” ()

| | | |
|--------------|---------------------------|--|
| NAME | ResourceLanguage | |
| DEFINITION | Language of the resource. | |
| STEREOTYPE | interface | |
| ABSTRACT | False | |
| ASSOCIATIONS | (none) | |

| | NAME | TYPE | DEFINITION |
|-------------|------------------|------------------------|--|
| ATTRIBUTES | code [1] | String | The language tag as per RFC-5646 |
| | name [0..1] | String | The untranslated name of the language |
| | alternate [0..1] | String | The name of the language in another well-understood language, usually English |
| | dir [0..1] | LanguageDirection Code | The direction for text in this language. The default, <code>ltr</code> (left-to-right), represents the most common situation. However, care should be taken to set the value of <code>dir</code> appropriately if the language direction is not <code>ltr</code> . Other values supported are <code>rtl</code> (right-to-left), <code>tbt</code> (top-to-bottom), and <code>btt</code> (bottom-to-top) |
| CONSTRAINTS | (none) | | |

Table B.28 – Elements of “OGC API – Common::TemporalExtent” ()

| | | | |
|--------------|--|----------------|---|
| NAME | TemporalExtent | | |
| DEFINITION | The temporal extent. First Interval is the overall interval and additional ones are spaced within the overall Interval | | |
| STEREOTYPE | interface | | |
| ABSTRACT | False | | |
| NAME | TYPE | DEFINITION | |
| | | Extent | Extent (none) |
| ASSOCIATIONS | source: (self) [none] | Extent | (none) |
| | target: temporal [0..1] | TemporalExtent | (none) |
| NAME | TYPE | DEFINITION | |
| ATTRIBUTES | | | Coordinate reference system of the coordinates in the temporal extent (property <code>interval</code>). The default reference system is the Gregorian calendar. In the Core this is the only supported temporal coordinate reference system. Extensions may support additional temporal coordinate reference systems and add additional enum values. |
| | trs [1] | String | |

| | | |
|---------------------------|----------|---|
| interval [1..*] | Interval | One or more time intervals that describe the temporal extent of the dataset. In the Core only a single time interval is supported. Extensions may support multiple intervals. The first time interval describes the overall temporal extent of the data. All subsequent time intervals describe more precise time intervals, e.g., to identify clusters of data. Clients only interested in the overall extent will only need to access the first item in each array. |
| CONSTRAINTS (none) | | |

Table B.29 – Elements of “OGC API – Common::SpatialExtent” ()

| | | |
|---|--|--|
| NAME | SpatialExtent | |
| DEFINITION | The spatial extent. ‘bbox’ is in ‘crs’. ‘storageCrsBox’ is in the storageCrs of the parent class. For bbox and storageCrsBbox, first BBox is the overall extent and additional ones are spaced within the overall extent | |
| STEREOTYPE | interface | |
| ABSTRACT | False | |
| NAME TYPE DEFINITION | | |
| ASSOCIATIONS | Extent | Extent (none) |
| | source:(self) [none] | Extent (none) |
| | target:spatial [0..1] | SpatialExtent (none) |
| NAME TYPE DEFINITION | | |
| ATTRIBUTES | crs [0..1] | String Coordinate reference system of the coordinates of the bbox property. The default reference system is CRS84. CRS84h for coordinates with height. For non-terrestrial coordinate reference system, another CRS may be specified |
| | bbox [1..*] | BBox Sorted list of one or more bounding boxes that describe the spatial extent of the dataset. The first bounding box describes the overall spatial extent of the data. All subsequent bounding boxes describe more precise bounding boxes, e.g., to identify clusters of data. Clients only interested in the overall spatial extent will only need to access the first item in each array. |
| | storageCrsBbox [*] | BBox One or more bounding boxes that describe the spatial extent of the dataset in the storage (native) CRS |

| | |
|--------------------|--|
| | (storageCrs property in the collectionDesc). The first bounding box describes the overall spatial extent of the data. All subsequent bounding boxes describe more precise bounding boxes, e.g., to identify clusters of data. Clients only interested in the overall spatial extent will only need to access the first item in each array. |
| CONSTRAINTS | (none) |

Table B.30 – Elements of “OGC API – Common::Theme” ()

| NAME | Theme | | | | | | | | |
|---------------------|--|-------------|---|-------------|-------------------|-------------------|------------------|--------|---|
| DEFINITION | A theme defined by a concept in an scheme of concepts. | | | | | | | | |
| STEREOTYPE | interface | | | | | | | | |
| ABSTRACT | False | | | | | | | | |
| ASSOCIATIONS | (none) | | | | | | | | |
| | <table> <thead> <tr> <th></th> <th>NAME</th> <th>TYPE</th> <th>DEFINITION</th> </tr> </thead> <tbody> <tr> <td>ATTRIBUTES</td> <td>scheme [0..1]</td> <td>String</td> <td>An identifier for the knowledge organization system used to classify the resource. It is recommended that the identifier be a resolvable URI. The list of schemes used in a searchable catalog can be determined by inspecting the server’s OpenAPI document or, if the server implements CQL2, by exposing a queryable (e.g. named scheme) and enumerating the list of schemes in the queryable’s schema definition.</td> </tr> </tbody> </table> | | NAME | TYPE | DEFINITION | ATTRIBUTES | scheme [0..1] | String | An identifier for the knowledge organization system used to classify the resource. It is recommended that the identifier be a resolvable URI. The list of schemes used in a searchable catalog can be determined by inspecting the server’s OpenAPI document or, if the server implements CQL2, by exposing a queryable (e.g. named scheme) and enumerating the list of schemes in the queryable’s schema definition. |
| | NAME | TYPE | DEFINITION | | | | | | |
| ATTRIBUTES | scheme [0..1] | String | An identifier for the knowledge organization system used to classify the resource. It is recommended that the identifier be a resolvable URI. The list of schemes used in a searchable catalog can be determined by inspecting the server’s OpenAPI document or, if the server implements CQL2, by exposing a queryable (e.g. named scheme) and enumerating the list of schemes in the queryable’s schema definition. | | | | | | |
| CONSTRAINTS | (none) | | | | | | | | |

Table B.31 – Definition table of “OGC API – Common::AccessConstraintsCode” (enumeration)

| | | |
|----------------------|---------------------------|-------------------|
| NAME: | AccessConstraintsCode | |
| DEFINITION: | Enumeration of contraints | |
| STEREOTYPE: | enumeration | |
| ABSTRACT: | False | |
| ASSOCIATIONS: | (none) | |
| VALUES: | <i>Name</i> | <i>Definition</i> |

| | |
|--------------|--------------------------------|
| confidential | Confidential access constraint |
| secret | secret access constraint |
| restricted | Restricted access constraint |
| topSecret | Top secret access constraint |
| unclassified | Unclassified access constraint |

Table B.32 – Definition table of “OGC API – Common::AttributionMediaTypeCode” ()

| NAME: | AttributionMediaTypeCode | |
|---------------|--|---------------------------|
| DEFINITION: | Enumeration of media types for attribution | |
| STEREOTYPE: | interface | |
| ABSTRACT: | False | |
| ASSOCIATIONS: | (none) | |
| | Name | Definition |
| VALUES: | text/plain | Plain text |
| | text/html | Hypertext markup language |
| | text/markdown | Mark down text format |

Table B.33 – Definition table of “OGC API – Common::LanguageDirectionCode” (enumeration)

| | | |
|---------------|-------------------------------------|--|
| NAME: | LanguageDirectionCode | |
| DEFINITION: | Enumeration of language directions. | |
| STEREOTYPE: | enumeration | |
| ABSTRACT: | False | |
| ASSOCIATIONS: | (none) | |

| | <i>Name</i> | <i>Definition</i> |
|----------------|-------------|-------------------|
| | ltr | left to right |
| VALUES: | rtl | right to left |
| | ttb | Top to bottom |
| | btt | Bottom to top |

Table B.34 – Definition table of “OGC API – Common::VariableType” ()

| NAME: | VariableType | |
|----------------------|---|-------------------------|
| DEFINITION: | Enumeration of Variable types. We reduced the 8 possible categories (combinations of: quantitative/qualitative, discrete/continuous, ordinal/nominal) to 5 because continuous shall be ordinal and numerical. | |
| STEREOTYPE: | interface | |
| ABSTRACT: | False | |
| ASSOCIATIONS: | (none) | |
| | <i>Name</i> | <i>Definition</i> |
| | continuous | Continuous |
| VALUES: | categoricalNominal | Categorical and nominal |
| | numericalOrdinal | Numerical and ordinal |
| | numericalNominal | Numerical and nominal |
| | categoricalOrdinal | Categorical and ordinal |

A yellow circle containing the letter 'C' is positioned on the left side of the page, with a thin yellow line extending from its bottom right corner towards the top right corner of the slide.

ANNEX C (INFORMATIVE) GLOSSARY

ANNEX C (INFORMATIVE) GLOSSARY

Conformance Test Module

set of related tests, all within a single conformance test class (OGC 08-131r3)

NOTE 1: When no ambiguity is possible, the word **test** may be omitted. i.e. conformance test module is the same as conformance module. Conformance modules may be nested in a hierarchical way. This term and those associated to it are included here for consistency with ISO 19105.

Conformance Test Class; Conformance Test Level

set of conformance test modules that must be applied to receive a single **certificate of conformance**. (OGC 08-131r3)

NOTE 2: When no ambiguity is possible, the word **test** may be left out, so conformance test class may be called a conformance class.

Executable Test Suite (ETS)

A set of code (e.g. Java and CTL) that provides runtime tests for the assertions defined by the ATS. Test data required to do the tests are part of the ETS [\(OGC 08-134\)](#)

Recommendation

expression in the content of a document conveying that among several possibilities one is recommended as particularly suitable, without mentioning or excluding others, or that a certain course of action is preferred but not necessarily required, or that (in the negative form) a certain possibility or course of action is deprecated but not prohibited (OGC 08-131r3)

NOTE 3: “Although using normative language, a recommendation is not a requirement. The usual form replaces the **shall** (imperative or command) of a requirement with a **should** (suggestive or conditional).” (ISO Directives Part 2)

Requirement

expression in the content of a document conveying criteria to be fulfilled if compliance with the document is to be claimed and from which no deviation is permitted (OGC 08-131r3)

Requirements Class

aggregate of all requirement modules that must all be satisfied to satisfy a conformance test class (OGC 08-131r3)

Requirements Module

aggregate of requirements and recommendations of a specification against a single standardization target type (OGC 08-131r3)

Standardization Target

entity to which some requirements of a standard apply (OGC 08-131r3)

NOTE 4: The standardization target is the entity which may receive a certificate of conformance for a requirements class.



D

ANNEX D (NORMATIVE) BACKUS-NAUR FORMS

ANNEX D (NORMATIVE) BACKUS-NAUR FORMS

D.1. BNF for URI

The following Augmented Backus-Naur Form (ABNF) is from Appendix A of IETF RFC 3986.

```

URI          = scheme ":" hier-part [ "?" query ] [ "#" fragment ]
hier-part    = "//" authority path-abempty
              / path-absolute
              / path-rootless
              / path-empty
URI-reference = URI / relative-ref
absolute-URI  = scheme ":" hier-part [ "?" query ]
relative-ref  = relative-part [ "?" query ] [ "#" fragment ]
relative-part = "//" authority path-abempty
                 / path-absolute
                 / path-noscheme
                 / path-empty
scheme        = ALPHA *( ALPHA / DIGIT / "+" / "-" / ".")
authority     = [ userinfo "@" ] host [ ":" port ]
userinfo      = *( unreserved / pct-encoded / sub-delims / ":" )
host          = IP-literal / IPv4address / reg-name
port          = *DIGIT
IP-literal    = "[" ( IPv6address / IPvFuture ) "]"
IPvFuture     = "v" 1*HEXDIG "." 1*( unreserved / sub-delims / ":" )
IPv6address   =
              /                               6( h16 ":" ) ls32
              /                               ":" 5( h16 ":" ) ls32
              / [ h16 ] ":" 4( h16 ":" ) ls32
              / [ *1( h16 ":" ) h16 ] ":" 3( h16 ":" ) ls32
              / [ *2( h16 ":" ) h16 ] ":" 2( h16 ":" ) ls32
              / [ *3( h16 ":" ) h16 ] ":" h16 ":" ls32
              / [ *4( h16 ":" ) h16 ] ":" ls32
              / [ *5( h16 ":" ) h16 ] ":" h16
              / [ *6( h16 ":" ) h16 ] ":" "
h16          = 1*4HEXDIG

```

```

ls32          = ( h16 ":" h16 ) / IPv4address
IPv4address  = dec-octet "." dec-octet "." dec-octet "."

dec-octet    = DIGIT                      ; 0-9
               / %x31-39 DIGIT          ; 10-99
               / "1" 2DIGIT            ; 100-199
               / "2" %x30-34 DIGIT      ; 200-249
               / "25" %x30-35           ; 250-255

reg-name      = *( unreserved / pct-encoded / sub-delims )

path          = path-abempty      ; begins with "/" or is empty
               / path-absolute     ; begins with "/" but not "://" 
               / path-noscheme     ; begins with a non-colon segment
               / path-rootless      ; begins with a segment
               / path-empty        ; zero characters

path-abempty  = *( "/" segment )
path-absolute = "/" [ segment-nz *( "/" segment ) ]
path-noscheme = segment-nz-nc *( "/" segment )
path-rootless = segment-nz *( "/" segment )
path-empty    = 0<pchar>

segment       = *pchar
segment-nz   = 1*pchar
segment-nz-nc = 1*( unreserved / pct-encoded / sub-delims / "@" )
               ; non-zero-length segment without any colon ":" 

pchar          = unreserved / pct-encoded / sub-delims / ":" / "@"

query          = *( pchar / "/" / "?" )

fragment       = *( pchar / "/" / "?" )

pct-encoded   = "%" HEXDIG HEXDIG

unreserved    = ALPHA / DIGIT / "-" / "." / "_" / "~"
reserved      = gen-delims / sub-delims
gen-delims    = ":" / "/" / "?" / "#" / "[" / "]" / "@"
sub-delims    = "!" / "$" / "&" / "'" / "(" / ")"
               / "*" / "+" / "." / ":" / "="

```

D.2. BNF for Date-Time

The following Augmented Backus-Naur Form (ABNF) is from IETF RFC 3339.

```
date-fullyear = 4DIGIT
date-month   = 2DIGIT ; 01-12
date-mday     = 2DIGIT ; 01-28, 01-29, 01-30, 01-31 based on month/year
time-hour     = 2DIGIT ; 00-23
time-minute   = 2DIGIT ; 00-59
time-second   = 2DIGIT ; 00-58, 00-59, 00-60 based on leap second rules
time-secfrac  = "." 1*DIGIT
time-numoffset = ("+" / "-") time-hour ":" time-minute
time-offset   = "Z" / time-numoffset
partial-time  = time-hour ":" time-minute ":" time-second [time-secfrac]
```

```
full-date      = date-fullyear "-" date-month "-" date-mday
full-time      = partial-time time-offset
date-time      = full-date "T" full-time
```

Listing D.2

Note that unlike ISO 8601, the local time zone offset is required by RFC 3339.



E

ANNEX E (NORMATIVE) HTTP STATUS CODES

ANNEX E (NORMATIVE) HTTP STATUS CODES

Table E.1 lists the main HTTP status codes that clients should be prepared to receive. This includes support for specific security schemes or URI redirection. In addition, other error situations may occur in the transport layer outside of the server.

Table E.1 – Typical HTTP status codes

| STATUS CODE | DESCRIPTION |
|-------------|---|
| 200 | A successful request. |
| 302 | The target resource was found but resides temporarily under a different URI. A 302 response is not evidence that the operation has been successfully completed. |
| 303 | The server is redirecting the user agent to a different resource. A 303 response is not evidence that the operation has been successfully completed. |
| 304 | An entity tag was provided in the request and the resource has not changed since the previous request. |
| 307 | The target resource resides temporarily under a different URI and the user agent MUST NOT change the request method if it performs an automatic redirection to that URI. |
| 308 | Indicates that the target resource has been assigned a new permanent URI and any future references to this resource ought to use one of the enclosed URIs. |
| 400 | The server cannot or will not process the request due to an apparent client error. For example, a query parameter had an incorrect value. |
| 401 | The request requires user authentication. The response includes a <code>WWW-Authenticate</code> header field containing a challenge applicable to the requested resource. |
| 403 | The server understood the request, but is refusing to fulfill it. While status code 401 indicates missing or bad authentication, status code 403 indicates that authentication is not the issue, but the client is not authorized to perform the requested operation on the resource. |
| 404 | The requested resource does not exist on the server. For example, a path parameter had an incorrect value. |
| 405 | The request method is not supported. For example, a POST request was submitted, but the resource only supports GET requests. |
| 406 | Content negotiation failed. For example, the <code>Accept</code> header submitted in the request did not support any of the media types supported by the server for the requested resource. |

| STATUS CODE | DESCRIPTION |
|-------------|---|
| 500 | An internal error occurred in the server. |

The status codes described in Table E.1 do not cover all possible conditions. See IETF RFC 7231 for a complete list of HTTP status codes.



F

ANNEX F (INFORMATIVE) REVISION HISTORY

ANNEX F (INFORMATIVE) REVISION HISTORY

Table F.1

| DATE | RELEASE | EDITOR | PRIMARY CLAUSES MODIFIED | DESCRIPTION |
|------------|----------|-------------------------------|--------------------------|--|
| 2021-10-06 | 0.0.9 | Charles Heazel | all | SWG review draft. |
| 2024-04-18 | 0.0.10 | Jérôme St-Louis | all | SWG review draft. |
| 2025-09-18 | 0.9.0 | Jérôme St-Louis, Joan Masó | all | Version ready for OAB review |
| 2025-12-04 | 1.0.0rc1 | Jérôme St-Louis, Joan Masó | all | Addressing Carl's comments, document ready for RFC. |



BIBLIOGRAPHY



BIBLIOGRAPHY

- [1] Peter Baumann: OGC 07-011r2, *Topic 6.1 – Schema for Coverage Geometry and Functions – Part 1: Fundamentals*. Open Geospatial Consortium (2024). <http://www.opengis.net/doc/AS/Topic-6.1/2.0>.
- [2] John Herring: OGC 06-103r4, *OpenGIS Implementation Specification for Geographic information – Simple feature access – Part 1: Common architecture*. Open Geospatial Consortium (2011). <http://www.opengis.net/doc/is/sfa/1.2.1>.
- [3] Policy SWG: OGC 08-131r3, *The Specification Model – Standard for Modular specifications*. Open Geospatial Consortium (2009). https://portal.ogc.org/files/?artifact_id=34762&version=2.
- [4] Peter Baumann, Eric Hirschorn, Joan Masó: OGC 09-146r6, *OGC Coverage Implementation Schema*. Open Geospatial Consortium (2017). <http://www.opengis.net/doc/IS/cis/1.1.0>.
- [5] P. Overell: IETF RFC 5234, *Augmented BNF for Syntax Specifications: ABNF*. RFC Publisher (2008). <https://www.rfc-editor.org/info/rfc5234>.
- [6] ISO: ISO 15836-2:2019, *Information and documentation – The Dublin Core metadata element set – Part 2: DCMI Properties and classes*. International Organization for Standardization, Geneva (2019). <https://www.iso.org/standard/71341.html>.
- [7] ISO: ISO 19101-1:2014, *Geographic information – Reference model – Part 1: Fundamentals*. International Organization for Standardization, Geneva (2014). <https://www.iso.org/standard/59164.html>.
- [8] ISO: ISO 19107:2019, *Geographic information – Spatial schema*. International Organization for Standardization, Geneva (2019). <https://www.iso.org/standard/66175.html>.
- [9] ISO: ISO 19108:2002, *Geographic information – Temporal schema*. International Organization for Standardization, Geneva (2002). <https://www.iso.org/standard/26013.html>.
- [10] ISO: ISO 19111:2019, *Geographic information – Referencing by coordinates*. International Organization for Standardization, Geneva (2019). <https://www.iso.org/standard/74039.html>.
- [11] ISO: ISO 19168-1:2020, *Geographic information – Geospatial API for features – Part 1: Core*. International Organization for Standardization, Geneva (2020). <https://www.iso.org/standard/32586.html>.
- [12] W3C: Data Catalog Vocabulary (DCAT) – Version 2, W3C Recommendation, 04 February 2020, <https://www.w3.org/TR/vocab-dcat-2/>

- [13] W3C: Data on the Web Best Practices, W3C Recommendation, 31 January 2017, <https://www.w3.org/TR/dwbp/>
- [14] Open Geospatial Consortium: Welcome To The OGC APIs [online, viewed 2020-03-16]. Available at <https://www.ogcapi.org/>.
- [15] Open Geospatial Consortium: OGC Link Relations Registry, [online, viewed 2024-11-20]. Available at <https://www.opengis.net/def/rel>
- [16] W3C/OGC: Spatial Data on the Web Best Practices, W3C Working Group Note, 28 September 2017, <https://www.w3.org/TR/sdw-bp/>
- [17] YAML Ain't Markup Language [online, viewed 2020-03-16]. Edited by O. Ben-Kiki, C. Evans, Ingy döt Net. Available at <https://yaml.org>.
- [18] Open Geospatial Consortium: Compliance Testing Program Policies & Procedures [online, viewed 2020-04-18]. Available at https://portal.ogc.org/files/?artifact_id=28982.
- [19] IANA: Link Relation Types, <https://www.iana.org/assignments/link-relations/link-relations.xml>
- [20] Fielding, Roy Thomas: Architectural Styles and the Design of Network-based Software Architectures. Doctoral dissertation, University of California, Irvine, 2000, https://www.ics.uci.edu/fielding/pubs/dissertation/fielding_dissertation.pdf